

Catalog Number: Item Description: UPC Code:

U7040-RL-TG-KK-BLG-AEP 200A 4T RL OU -KK-TG 784572706477

| Brand Name: | Milbank |
|--------------------|--|
| Туре: | Ringless Meter Socket |
| Application: | Meter Socket |
| Standard: | UL Listed |
| Voltage Rating: | 600 Volts Alternating Current |
| Amperage Rating: | 200 Continuous Ampere |
| Phase: | 1 Phase |
| Frequency Rating: | 60 Hertz |
| Number Of Cutouts: | 0 |
| Cable Entry: | Overhead and Underground |
| Terminal: | Single Lay in Line Side and Load Side Connectors |
| Mounting: | Surface Mount |
| Enclosure: | Type 3R, G90 Galvanized Steel with Powder Coat Finish |




Additional Specifications:


Number of Jaws:4 Terminal


Hub Opening and Closing Plates:Small Hub Opening


Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

| FEATURE TABLE | | | |
|---------------|-----|---|--|
| ITEM | QTY | DESCRIPTION | |
| Α | 7 | U/L MNTG.EMBOSS | |
| В | 1 | 1/4 SOLID K.O. | |
| С | 1 | 1/4, 1/2 CONC. K.O. | |
| D | 6 | ³ ⁄ ₄ , 1, 11⁄ ₄ , 11⁄ ₂ , 2, 21⁄ ₂ CONC. K.O. | |
| | A | A 7 | |

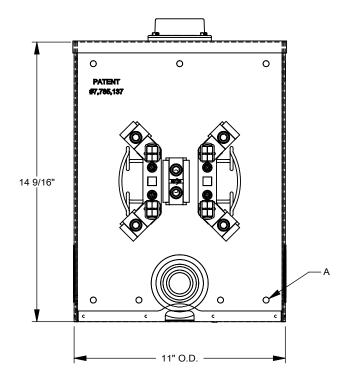

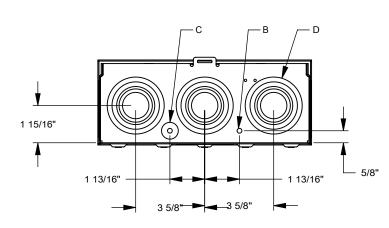

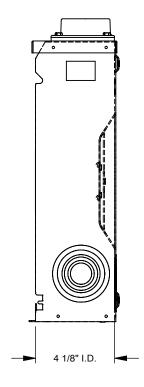

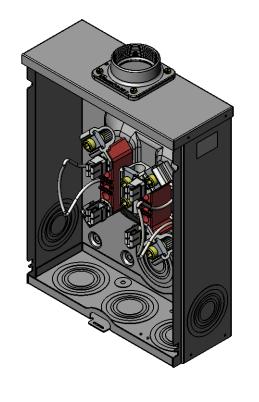



Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.