
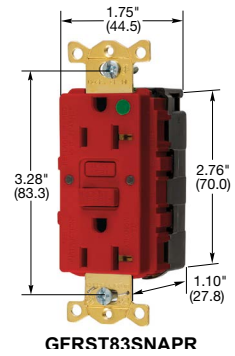



# Hospital Products

15 and 20 Ampere, 125 Volts

## SNAPConnect® GFCI LED Hospital Grade ● Receptacles


Description	Color	Catalog Number	Catalog Number
Hospital Grade SNAPConnect GFCI LED, self-grounding staple, requires connector below, sold separately. Add "NA" suffix for devices Assembled in USA.	Black	<b>GFRST82SNAPBK</b>	<b>GFRST83SNAPBK</b>
	Brown	<b>GFRST82SNAP</b>	<b>GFRST83SNAP</b>
	Gray	<b>GFRST82SNAPGY</b>	<b>GFRST83SNAPGY</b>
	Ivory	<b>GFRST82SNAPI</b>	<b>GFRST83SNAPI</b>
	Light Almond	<b>GFRST82SNAPLA</b>	<b>GFRST83SNAPLA</b>
	Red	<b>GFRST82SNAPR</b>	<b>GFRST83SNAPR</b>
	White	<b>GFRST82SNAPW</b>	<b>GFRST83SNAPW</b>



GFRST83SNAPR

## SNAPConnect® GFCI LED Hospital Grade ● Tamper and Weather Resistant

Description	Color	Catalog Number	Catalog Number
Hospital Grade SNAPConnect GFCI TR/WR, self-grounding staple, requires connector below, sold separately. Add "NA" suffix for devices Assembled in USA.	Black	<b>GFTWRST82SNAPBK</b>	<b>GFTWRST83SNAPBK</b>
	Brown	<b>GFTWRST82SNAP</b>	<b>GFTWRST83SNAP</b>
	Gray	<b>GFTWRST82SNAPGY</b>	<b>GFTWRST83SNAPGY</b>
	Ivory	<b>GFTWRST82SNAPI</b>	<b>GFTWRST83SNAPI</b>
	Light Almond	<b>GFTWRST82SNAPLA</b>	<b>GFTWRST83SNAPLA</b>
	Red	<b>GFTWRST82SNAPR</b>	<b>GFTWRST83SNAPR</b>
	White	<b>GFTWRST82SNAPW</b>	<b>GFTWRST83SNAPW</b>





GFTWRST83SNAPI

Note: GFCI type receptacles should not be used in critical care patient areas or for electrical life support equipment applications because of the possibility of power interruption. All GFCI receptacles are furnished with a matching color thermoplastic wallplate, 20 amp feed-through capability. See page Tech-10 for Tamper-Resistant description.

## SNAPConnect® USB Charger Hospital Grade ● TR Receptacles




Description	Color	Catalog Number	Catalog Number
Hospital Grade SNAPConnect USB Charger, Tamper-Resistant Style Line® decorator duplex receptacle, 15 or 20 Amp, 125 Volt AC with one type A & one type-C USB port, 3 Amp up to 9 Volt USB output.	Black	<b>SNAP8200UACBK</b>	<b>SNAP8300UACBK</b>
	Brown	<b>SNAP8200UAC</b>	<b>SNAP8300UAC</b>
	Gray	<b>SNAP8200UACGY</b>	<b>SNAP8300UACGY</b>
	Ivory	<b>SNAP8200UACI</b>	<b>SNAP8300UACI</b>
	Light Almond	<b>SNAP8200UACLA</b>	<b>SNAP8300UACLA</b>
	Red	<b>SNAP8200UACR</b>	<b>SNAP8300UACR</b>
	White	<b>SNAP8200UACW</b>	<b>SNAP8300UACW</b>



SNAP8300UACW

## SNAPConnect® Surge Protection Hospital Grade ● Tamper-Resistant Receptacle with Power Indicating LED


Description	Color	Catalog Number	Catalog Number
Hospital Grade SNAPConnect Surge suppression, Tamper-Resistant, smooth face, duplex receptacle.	Blue	<b>SNAP8262S</b>	<b>SNAP8362S</b>
	Gray	<b>SNAP8262GYS</b>	<b>SNAP8362GYS</b>
	Ivory	<b>SNAP8262IS</b>	<b>SNAP8362IS</b>
	Light Almond	<b>SNAP8262LAS</b>	<b>SNAP8362LAS</b>
	Red	<b>SNAP8262RS</b>	<b>SNAP8362RS</b>
	White	<b>SNAP8262WS</b>	<b>SNAP8362WS</b>



SNAP8262S

## SNAPConnect® Right Angle Pigtailed Connector

Description	Wire Type	General Use	Assembled in USA
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material.	Solid	<b>SNAP1RA</b>	<b>SNAP1RNA</b>
	Stranded	<b>SNAP2RA</b>	<b>SNAP2RNA</b>
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material with WAGO terminals.	Solid	<b>SNAP1RAM2</b>	<b>SNAP1RNAM2</b>
	Stranded	<b>SNAP2RAM2</b>	<b>SNAP2RNAM2</b>



SNAP1RA

Note: See page Tech-10 for Tamper-Resistant, Weather Resistant and LED Power Indicators descriptions.

Dimensions in Inches (mm)