

## *Savings and Productivity Are Just a "SNAP" Away*

*Hospital Grade*

*Specification Grade  
Receptacles*

*Split Circuit*

*Style Line® Decorator*

*Single Receptacles*

*GFCIs*


*USB Charging  
Receptacles*

*Permanently Marked  
Receptacles*

*Surge Protection*

*Isolated Ground*

*Switches*

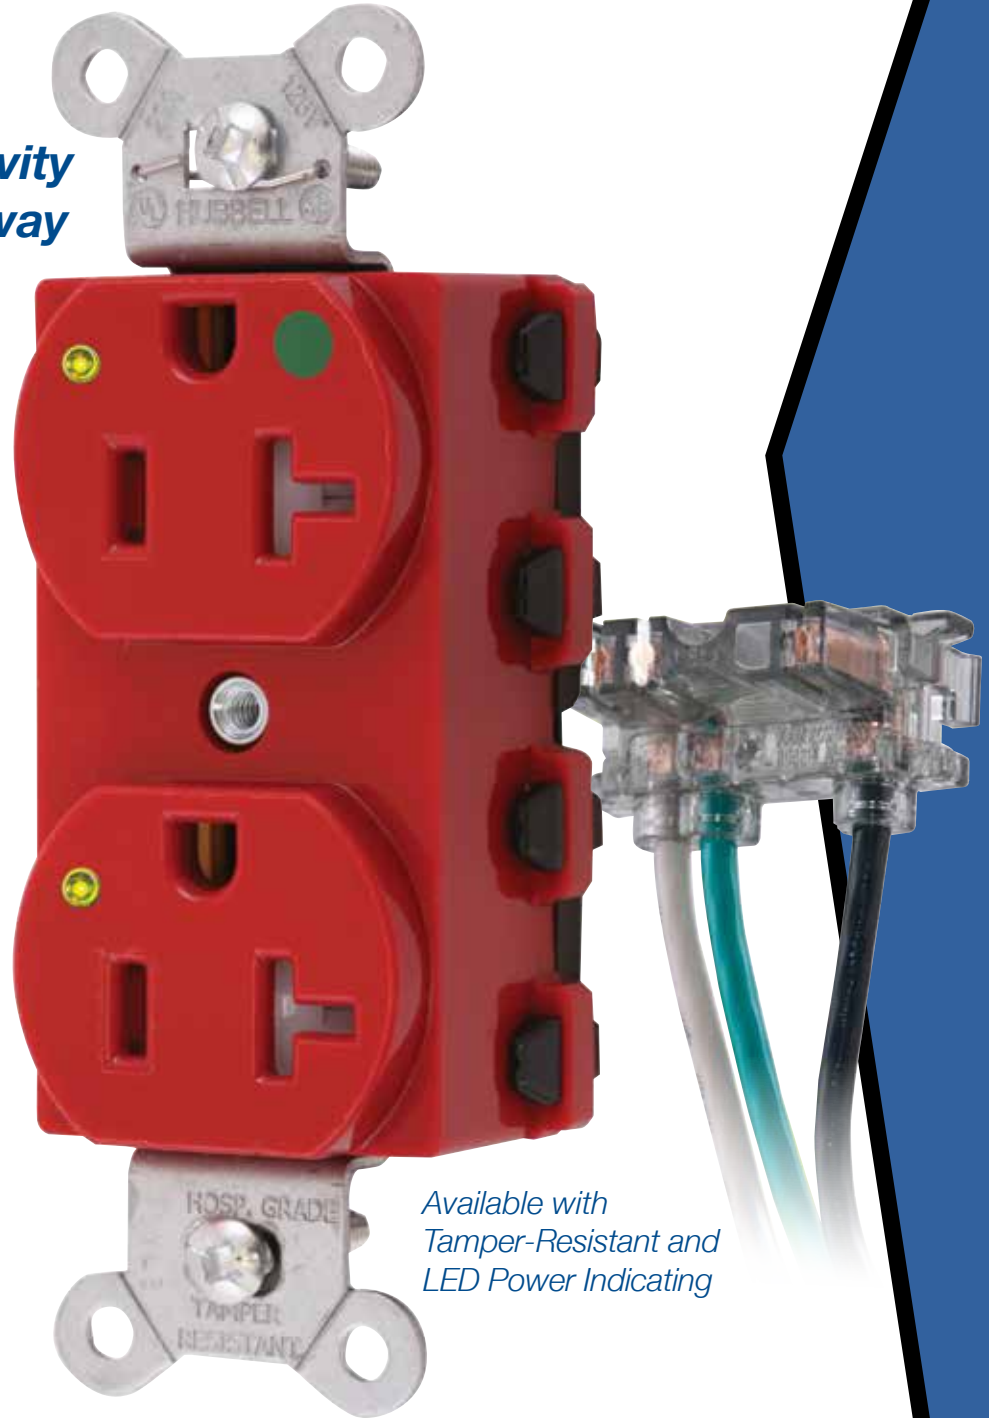

*Available with  
Tamper-Resistant and  
LED Power Indicating*



## Table of Contents

**Tester and Connectors**  
SNAPConnect® Tester and Pigtailed Connectors . . . . 3

**Receptacles**  
Extra Heavy Duty  
Hospital Grade . . . . . 4-5

- Standard
- Tamper-Resistant
- LED Power Indicator

Extra Heavy Duty  
Specification Grade . . . 6-7

- Standard
- Tamper-Resistant
- LED Power Indicator

Permanently Marked  
Receptacles . . . . . 8-9

- One Controlled Face
- Two Controlled Faces

Single Receptacles . . . . . 10

- Hospital Grade
- Specification Grade

USB Charger  
Receptacles . . . . . 11

- Hospital Grade
- Specification Grade

GFCI Receptacles . . . . . 12

- Hospital Grade
- Specification Grade

Surge Receptacles and  
Isolated Ground . . . . . 13

- Hospital Grade
- Specification Grade
- Tamper-Resistant
- LED Power Indicator

**Switches**  
Toggle Switches . . . . . 14

- Specification Grade
- LED Illuminated
- Pilot Light

Decorator Switches . . . . . 15

- Specification Grade
- LED Illuminated
- Pilot Light

Many of these products are Assembled in USA, as indicated, and many are Buy American Compliant. Please contact Hubbell with any certification requirements.



## Labor Savings Save up to 5 Minutes

**Save One Minute**  
Rough-in the SNAPConnect® terminal instead of pigtails

**Save Over Three Minutes**  
Remove protective packaging and SNAPConnect® the device to the circuit

**Complete Trim-Out in Less Than One Minute**  
Secure mounting screws, attach wallplate and job complete



Power Indicating

Used most often to identify emergency circuits in hospitals, the two LED power indicators, bright enough to be visible in low light and bright daylight conditions, identify face with power.



Tamper-Resistant

Compliant with NEC® 406.12 and NEC®517-18(c), SNAPConnect® Tamper-Resistant Receptacles are acceptable for use in residential dwellings and pediatric locations.



Isolated Ground

SNAPConnect® Isolated Ground devices provide a clean ground path for sensitive equipment. Devices are available with power indication and tamper-resistant.



Surge Protection

SpikeShield® SNAPConnect® Tamper-Resistant Surge receptacles provide excellent point of use protection for sensitive electronic loads from every day power spikes and surges.



USB Charger Receptacles

SNAPConnect® USB Charger provides USB power in a standard single gang electrical opening. Designed to provide maximum charging for portable electronics.



**Save One Minute!**  
Rough-in the SNAPConnect® terminal instead of pigtails.



**Save Over Three Minutes!**  
Remove protective packaging and SNAPConnect® device to the circuit.



**Complete Trim-Out in Less Than One Minute!**  
Secure mounting screws, attach wallplate, job complete.

## SNAPConnect® Tester


### Three in One Tester

- Tests Proper Wiring of the SNAPConnect® Receptacle Terminal
- Tests Proper Wiring of Standard Receptacles
- Tests GFCI Receptacles




## Clear Right Angle Pigtailed Connectors

- Audible SNAP, Indicates Solid Connection
  - Secure, Easy Grip Latch
- Inspection of Power Contacts
  - Clear Terminal Housing
  - No Exposed Metal
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



**No Special Tester Required**  
.085 inch keyhole accepts the probe points found on the most common voltage testers and digital multi-meters




Receptacles




GFCIs



USB Chargers



Toggle Switches



Decorator Switches

### SNAPConnect® Tester

| Description   | Catalog Number |
|---|----------------|
| Circuit Tester for SNAPConnect receptacle terminals, GFCI and standard receptacles. | <b>SNAPCTG</b> |



SNAPCTG

### SNAPConnect® Right Angle Pigtailed Connectors for Receptacles

| Description                           | Wire Type | General Use      | Assembled in USA  |
|---------------------------------------|-----------|------------------|-------------------|
| 6 inch wire connector.                | Solid     | <b>SNAP1RA</b>   | <b>SNAP1RNA</b>   |
| 6 inch wire with push-wire terminals. |           | <b>SNAP1RAM2</b> | <b>SNAP1RNAM2</b> |
| 6 inch wire connector.                | Stranded  | <b>SNAP2RA</b>   | <b>SNAP2RNA</b>   |
| 6 inch wire with push-wire terminals. |           | <b>SNAP2RAM2</b> | <b>SNAP2RNAM2</b> |
| SNAP2RNA with 40 inch leads.          |           | —                | <b>SNAP2RNAM1</b> |
| SNAP2RNA with 100 inch leads.         |           | —                | <b>SNAP2RNAM3</b> |



SNAP1RA

### SNAPConnect® Right Angle Pigtailed Connectors for Switches

| Description  | Wire Type | Catalog Number     |
|--|-----------|--------------------|
| Switch jumper, single pole, illuminated.                               | —         | <b>SNAPSWJUMP</b>  |
| 6 inch single pole switch.   | Solid     | <b>SNAPSP1NA</b>   |
| 6 inch single pole switch, wire with push-wire terminals.              |           | <b>SNAPSP1NAM2</b> |
| 6 inch single pole, pilot light switch.                                |           | <b>SNAPSP1NA</b>   |
| 6 inch single pole, pilot light switch, wire with push-wire terminals. |           | <b>SNAPSP1NAM2</b> |
| 6 inch 3 way pole, pilot light switch.                                 |           | <b>SNAP3W1NA</b>   |
| 6 inch 3 way pole, pilot light switch, wire with push-wire terminals.  |           | <b>SNAP3W1NAM2</b> |
| 6 inch single pole switch.   | Stranded  | <b>SNAPSP2NA</b>   |
| 6 inch single pole switch, wire with push-wire terminals.              |           | <b>SNAPSP2NAM2</b> |
| 6 inch single pole, pilot light switch.                                |           | <b>SNAPSP2NA</b>   |
| 6 inch single pole, pilot light switch, wire with push-wire terminals. |           | <b>SNAPSP2NAM2</b> |
| 6 inch 3 way pole, pilot light switch.                                 |           | <b>SNAP3W2NA</b>   |
| 6 inch 3 way pole, pilot light switch, wire with push-wire terminals.  |           | <b>SNAP3W2NAM2</b> |



SNAPSWJUMP



SNAPSP1NA



SNAP3W1NA




# SNAPConnect® Hospital Grade Receptacles



## Extra Heavy Duty Hospital Grade Duplex Receptacles

### Features and Benefits

- Available in Hospital Grade, Tamper-Resistant and LED Power Indicating Versions
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device
- Split Circuit Available



### Applications

- Hospitals
- Healthcare Facilities
- Outpatient Care Centers
- Urgent Care Offices
- Commercial Construction
- Long Term Care
- Labs/Imaging

NEC® Article 517.41 requires receptacles on the emergency circuit to be readily identified by color or wall plate markings. LED power indicators provide instant, visual assurance that power is available at the receptacle. "SNAPConnect® Hospital Grade TR receptacles comply with NEC® section 517.18(C) requiring receptacles located within the rooms, bathrooms, playrooms, activity rooms and patient care areas of designated pediatric locations to be listed tamper-resistant."



## SNAPConnect® Extra Heavy Duty Hospital Grade Standard Duplex Receptacles

| Color        | Hospital Grade ● Finder Groove Face |             | Hospital Grade ● Smooth Face |              | BAA Compliant |
|--------------|-------------------------------------|-------------|------------------------------|--------------|---------------|
|              | 15A 125V                            | 20A 125V    | 15A 125V                     | 20A 125V     |               |
| Black        | SNAP8200BKA                         | SNAP8300BKA | SNAP8200BKNA                 | SNAP8300BKNA |               |
| Brown        | SNAP8200A                           | SNAP8300A   | SNAP8200NA                   | SNAP8300NA   |               |
| Gray         | SNAP8200GYA                         | SNAP8300GYA | SNAP8200GYNA                 | SNAP8300GYNA |               |
| Ivory        | SNAP8200IA                          | SNAP8300IA  | SNAP8200INA                  | SNAP8300INA  |               |
| Light Almond | SNAP8200LAA                         | SNAP8300LAA | SNAP8200LANA                 | SNAP8300LANA |               |
| Red          | SNAP8200RA                          | SNAP8300RA  | SNAP8200RNA                  | SNAP8300RNA  |               |
| White        | SNAP8200WA                          | SNAP8300WA  | SNAP8200WNA                  | SNAP8300WNA  |               |



SNAP8200IA



SNAP8300INA

## SNAPConnect® Extra Heavy Duty Hospital Grade Tamper-Resistant Duplex Receptacles

| Color        | Hospital Grade ● Tamper-Resistant |               | Hospital Grade ● Tamper-Resistant, Split Circuit | BAA Compliant   |
|--------------|-----------------------------------|---------------|--|-----------------|
|              | 15A 125V                          | 20A 125V      |  |                 |
| Black        | SNAP8200BKTRA                     | SNAP8300BKTRA | SNAP8200BKSCTRA                                  | SNAP8300BKSCTRA |
| Brown        | SNAP8200TRA                       | SNAP8300TRA   | SNAP8200SCTRA                                    | SNAP8300SCTRA   |
| Gray         | SNAP8200GYTRA                     | SNAP8300GYTRA | SNAP8200GYSCTRA                                  | SNAP8300GYSCTRA |
| Ivory        | SNAP8200ITRA                      | SNAP8300ITRA  | SNAP8200ISCTRA                                   | SNAP8300ISCTRA  |
| Light Almond | SNAP8200LATRA                     | SNAP8300LATRA | SNAP8200LASCTRA                                  | SNAP8300LASCTRA |
| Red          | SNAP8200RTRA                      | SNAP8300RTRA  | SNAP8200RSCTRA                                   | SNAP8300RSCTRA  |
| White        | SNAP8200WTRA                      | SNAP8300WTRA  | SNAP8200WSCTRA                                   | SNAP8300WSCTRA  |



SNAP8200WTRA



SNAP8300SCTRA

## SNAPConnect® Extra Heavy Duty Hospital Grade LED and Tamper-Resistant with Power Indicating LED Duplex Receptacles

| Color        | Hospital Grade ● LED |             | Hospital Grade ● LED & Tamper-Resistant |                | BAA Compliant |
|--------------|----------------------|-------------|---|----------------|---------------|
|              | 15A 125V             | 20A 125V    | 15A 125V                                | 20A 125V       |               |
| Black        | SNAP8200BKL          | SNAP8300BKL | SNAP8200BKLTRA                          | SNAP8300BKLTRA |               |
| Brown        | SNAP8200L            | SNAP8300L   | SNAP8200LTRA                            | SNAP8300LTRA   |               |
| Gray         | SNAP8200GYL          | SNAP8300GYL | SNAP8200GYLTRA                          | SNAP8300GYLTRA |               |
| Ivory        | SNAP8200IIL          | SNAP8300IIL | SNAP8200IILTRA                          | SNAP8300IILTRA |               |
| Light Almond | SNAP8200LAL          | SNAP8300LAL | SNAP8200LALTRA                          | SNAP8300LALTRA |               |
| Red          | SNAP8200RL           | SNAP8300RL  | SNAP8200RLTRA                           | SNAP8300RLTRA  |               |
| White        | SNAP8200WL           | SNAP8300WL  | SNAP8200WLTRA                           | SNAP8300WLTRA  |               |



SNAP8200GYL




SNAP8300RLTRA

Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.

## Extra Heavy Duty Hospital Grade Style Line® Decorator Receptacles

### Features and Benefits

- Available in Hospital Grade, Tamper-Resistant and LED Power Indicating Versions
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device
- Split Circuit Available

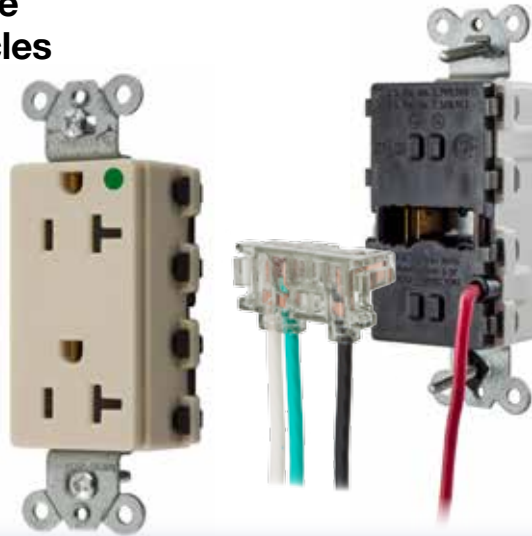


### Applications

- Hospitals
- Healthcare Facilities
- Labs/Imaging
- Long Term Care
- Commercial Construction


NEC® Article 517.41 requires receptacles on the emergency circuit to be readily identified by color or wall plate markings. LED power indicators provide instant, visual assurance that power is available at the receptacle. "SNAPConnect® Hospital Grade TR receptacles comply with NEC® section 517.18(C) requiring receptacles located within the rooms, bathrooms, playrooms, activity rooms and patient care areas of designated pediatric locations to be listed tamper-resistant."

### SNAPConnect® Extra Heavy Duty Hospital Grade Style Line® Decorator Standard Duplex Receptacles

| Color        | Hospital Grade ● Standard |             | Hospital Grade ● Standard |              | BAA Compliant   |
|--------------|---------------------------|-------------|---------------------------|--------------|---|
|              | 15A 125V                  | 20A 125V    | 15A 125V                  | 20A 125V     |   |
| Black        | SNAP2172BKA               | SNAP2182BKA | SNAP2172BKNA              | SNAP2182BKNA |  |
| Brown        | SNAP2172A                 | SNAP2182A   | SNAP2172NA                | SNAP2182NA   |   |
| Gray         | SNAP2172GYA               | SNAP2182GYA | SNAP2172GYNA              | SNAP2182GYNA |   |
| Ivory        | SNAP2172IA                | SNAP2182IA  | SNAP2172INA               | SNAP2182INA  |   |
| Light Almond | SNAP2172LAA               | SNAP2182LAA | SNAP2172LANA              | SNAP2182LANA |   |
| Red          | SNAP2172RA                | SNAP2182RA  | SNAP2172RNA               | SNAP2182RNA  |   |
| White        | SNAP2172WA                | SNAP2182WA  | SNAP2172WNA               | SNAP2182WNA  |   |




### SNAPConnect® Extra Heavy Duty Hospital Grade Tamper-Resistant Style Line® Decorator Duplex Receptacles

| Color        | Hospital Grade ● Tamper-Resistant |               | Hospital Grade ● Tamper-Resistant, Split Circuit |                 | BAA Compliant   |
|--------------|-----------------------------------|---------------|--|-----------------|---|
|              | 15A 125V                          | 20A 125V      | 15A 125V   | 20A 125V        |   |
| Black        | SNAP2172BKTRA                     | SNAP2182BKTRA | SNAP2172BKSCTRA                                  | SNAP2182BKSCTRA |  |
| Brown        | SNAP2172TRA                       | SNAP2182TRA   | SNAP2172SCTRA                                    | SNAP2182SCTRA   |   |
| Gray         | SNAP2172GYTRA                     | SNAP2182GYTRA | SNAP2172GYSCTRA                                  | SNAP2182GYSCTRA |   |
| Ivory        | SNAP2172ITRA                      | SNAP2182ITRA  | SNAP2172ISCTRA                                   | SNAP2182ISCTRA  |   |
| Light Almond | SNAP2172LATRA                     | SNAP2182LATRA | SNAP2172LASCTRA                                  | SNAP2182LASCTRA |   |
| Red          | SNAP2172RTRA                      | SNAP2182RTRA  | SNAP2172RSCTRA                                   | SNAP2182RSCTRA  |   |
| White        | SNAP2172WTRA                      | SNAP2182WTRA  | SNAP2172WSCTRA                                   | SNAP2182WSCTRA  |   |



### SNAPConnect® Extra Heavy Duty Hospital Grade Style Line® Decorator LED and Tamper-Resistant with Power Indicating LED Duplex Receptacles BAA Compliant

| Color        | Hospital Grade ● LED |             | Hospital Grade ● LED & Tamper-Resistant |               | BAA Compliant   |
|--------------|----------------------|-------------|---|---------------|---|
|              | 15A 125V             | 20A 125V    | 15A 125V                                | 20A 125V      |   |
| Black        | SNAP2172BKL          | SNAP2182BKL | SNAP2172BKLTR                           | SNAP2182BKLTR |  |
| Brown        | SNAP2172L            | SNAP2182L   | SNAP2172LTR                             | SNAP2182LTR   |   |
| Gray         | SNAP2172GYL          | SNAP2182GYL | SNAP2172GYLTR                           | SNAP2182GYLTR |   |
| Ivory        | SNAP2172IL           | SNAP2182IL  | SNAP2172ILTR                            | SNAP2182ILTR  |   |
| Light Almond | SNAP2172LAL          | SNAP2182LAL | SNAP2172LALTR                           | SNAP2182LALTR |   |
| Red          | SNAP2172RL           | SNAP2182RL  | SNAP2172RLTR                            | SNAP2182RLTR  |   |
| White        | SNAP2172WL           | SNAP2182WL  | SNAP2172WLTR                            | SNAP2182WLTR  |   |



Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.


# SNAPConnect® Specification Grade Receptacles



## Extra Heavy Duty Specification Grade Duplex Receptacles

### Features and Benefits

- Available in Standard, Tamper-Resistant and LED Power Indicating Versions
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device
- Split Circuit Available



### Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

SNAPConnect® TR receptacles comply with the 2017 NEC® requiring Tamper-Resistant receptacles in dwelling units, child care facilities, guest rooms and guest suites (NEC® Article 406.12).



### SNAPConnect® Extra Heavy Duty Standard Duplex Receptacles

| Color        | Specification Grade Finder Groove Face |             | Specification Grade Smooth Face |              | BAA Compliant |
|--------------|--|-------------|---------------------------------|--------------|---------------|
|              | 15A 125V                               | 20A 125V    | 15A 125V                        | 20A 125V     |               |
| Black        | SNAP5262BKA                            | SNAP5362BKA | SNAP5262BKNA                    | SNAP5362BKNA |               |
| Blue         | —                                      | —           | SNAP5262BLNA                    | SNAP5362BLNA |               |
| Brown        | SNAP5262A                              | SNAP5362A   | SNAP5262NA                      | SNAP5362NA   |               |
| Gray         | SNAP5262GYA                            | SNAP5362GYA | SNAP5262GYNA                    | SNAP5362GYNA |               |
| Ivory        | SNAP5262IA                             | SNAP5362IA  | SNAP5262INA                     | SNAP5362INA  |               |
| Light Almond | SNAP5262LAA                            | SNAP5362LAA | SNAP5262LANA                    | SNAP5362LANA |               |
| Red          | SNAP5262RA                             | SNAP5362RA  | SNAP5262RNA                     | SNAP5362RNA  |               |
| White        | SNAP5262WA                             | SNAP5362WA  | SNAP5262WNA                     | SNAP5362WNA  |               |



SNAP5262IA

SNAP5262NA

### SNAPConnect® Extra Heavy Duty Tamper-Resistant Duplex Receptacles

| Color        | Specification Grade Tamper-Resistant |               | Spec. Grade Tamper-Resistant, Split Circuit |                 | BAA Compliant |
|--------------|--------------------------------------|---------------|---|-----------------|---------------|
|              | 15A 125V                             | 20A 125V      | 15A 125V                                    | 20A 125V        |               |
| Black        | SNAP5262BKTRA                        | SNAP5362BKTRA | SNAP5262BKSCTRA                             | SNAP5362BKSCTRA |               |
| Blue         | SNAP5262BLTRA                        | SNAP5362BLTRA | SNAP5262BLSCTRA                             | SNAP5362BLSCTRA |               |
| Brown        | SNAP5262TRA                          | SNAP5362TRA   | SNAP5262SCTRA                               | SNAP5362SCTRA   |               |
| Gray         | SNAP5262GYTRA                        | SNAP5362GYTRA | SNAP5262GYSCTRA                             | SNAP5362GYSCTRA |               |
| Ivory        | SNAP5262ITRA                         | SNAP5362ITRA  | SNAP5262ISCTRA                              | SNAP5362ISCTRA  |               |
| Light Almond | SNAP5262LATRA                        | SNAP5362LATRA | SNAP5262LASCTRA                             | SNAP5362LASCTRA |               |
| Red          | SNAP5262RTRA                         | SNAP5362RTRA  | SNAP5262RSCTRA                              | SNAP5362RSCTRA  |               |
| White        | SNAP5262WTRA                         | SNAP5362WTRA  | SNAP5262WSCTRA                              | SNAP5362WSCTRA  |               |



SNAP5262BKTRA

SNAP5362WSCTRA

### SNAPConnect® Extra Heavy Duty LED and Tamper-Resistant with Power Indicating LED Duplex Receptacles

| Color        | Specification Grade LED |             | Spec. Grade LED & Tamper-Resistant |                | BAA Compliant |
|--------------|-------------------------|-------------|------------------------------------|----------------|---------------|
|              | 15A 125V                | 20A 125V    | 15A 125V                           | 20A 125V       |               |
| Black        | SNAP5262BKL             | SNAP5362BKL | SNAP5262BKLTRA                     | SNAP5362BKLTRA |               |
| Blue         | SNAP5262BLL             | SNAP5362BLL | SNAP5262BLLTRA                     | SNAP5362BLLTRA |               |
| Brown        | SNAP5262L               | SNAP5362L   | SNAP5262LTRA                       | SNAP5362LTRA   |               |
| Gray         | SNAP5262GYL             | SNAP5362GYL | SNAP5262GYLTRA                     | SNAP5362GYLTRA |               |
| Ivory        | SNAP5262IL              | SNAP5362IL  | SNAP5262ILTRA                      | SNAP5362ILTRA  |               |
| Light Almond | SNAP5262LAL             | SNAP5362LAL | SNAP5262LALTRA                     | SNAP5362LALTRA |               |
| Red          | SNAP5262RL              | SNAP5362RL  | SNAP5262RLTRA                      | SNAP5362RLTRA  |               |
| White        | SNAP5262WL              | SNAP5362WL  | SNAP5262WLTRA                      | SNAP5362WLTRA  |               |



SNAP5262BLL


SNAP5362GYLTRA

Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.

## Extra Heavy Duty Specification Grade Style Line® Decorator Receptacles

### Features and Benefits

- Available in Standard, Tamper-Resistant and LED Power Indicating Versions
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device
- Split Circuit Available





### Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM


SNAPConnect® TR receptacles comply with the 2017 NEC® requiring Tamper-Resistant receptacles in dwelling units, child care facilities, guest rooms and guest suites (NEC® Article 406.12).

### SNAPConnect® Extra Heavy Duty Style Line® Decorator Standard Duplex Receptacles

| Color        | Specification Grade Standard |             | Specification Grade Standard |              | BAA Compliant   |
|--------------|------------------------------|-------------|------------------------------|--------------|---|
|              | 15A 125V                     | 20A 125V    | 15A 125V                     | 20A 125V     |   |
| Black        | SNAP2152BKA                  | SNAP2162BKA | SNAP2152BKNA                 | SNAP2162BKNA | <br>SNAP2152BKA |
| Blue         | —                            | —           | SNAP2152BLNA                 | SNAP2162BLNA |   |
| Brown        | SNAP2152A                    | SNAP2162A   | SNAP2152NA                   | SNAP2162NA   |   |
| Gray         | SNAP2152GYA                  | SNAP2162GYA | SNAP2152GYNA                 | SNAP2162GYNA |   |
| Ivory        | SNAP2152IA                   | SNAP2162IA  | SNAP2152INA                  | SNAP2162INA  |   |
| Light Almond | SNAP2152LAA                  | SNAP2162LAA | SNAP2152LANA                 | SNAP2162LANA |   |
| Red          | SNAP2152RA                   | SNAP2162RA  | SNAP2152RNA                  | SNAP2162RNA  |   |
| White        | SNAP2152WA                   | SNAP2162WA  | SNAP2152WNA                  | SNAP2162WNA  |   |




### SNAPConnect® Extra Heavy Duty Style Line® Decorator Tamper-Resistant Duplex Receptacles

| Color        | Specification Grade Tamper-Resistant |               | Spec. Grade Tamper-Resistant, Split Circuit |                 | BAA Compliant  |
|--------------|--------------------------------------|---------------|---|-----------------|--|
|              | 15A 125V                             | 20A 125V      | 15A 125V                                    | 20A 125V        |  |
| Black        | SNAP2152BKTRA                        | SNAP2162BKTRA | SNAP2152BKSCTRA                             | SNAP2162BKSCTRA | <br>SNAP2152BKTRA |
| Blue         | SNAP2152BLTRA                        | SNAP2162BLTRA | SNAP2152BLSCTRA                             | SNAP2162BLSCTRA |  |
| Brown        | SNAP2152TRA                          | SNAP2162TRA   | SNAP2152SCTRA                               | SNAP2162SCTRA   |  |
| Gray         | SNAP2152GYTRA                        | SNAP2162GYTRA | SNAP2152GYSCTRA                             | SNAP2162GYSCTRA |  |
| Ivory        | SNAP2152ITRA                         | SNAP2162ITRA  | SNAP2152ISCTRA                              | SNAP2162ISCTRA  |  |
| Light Almond | SNAP2152LATRA                        | SNAP2162LATRA | SNAP2152LASCTRA                             | SNAP2162LASCTRA |  |
| Red          | SNAP2152RTRA                         | SNAP2162RTRA  | SNAP2152RSCTRA                              | SNAP2162RSCTRA  |  |
| White        | SNAP2152WTRA                         | SNAP2162WTRA  | SNAP2152WSCTRA                              | SNAP2162WSCTRA  |  |



### SNAPConnect® Extra Heavy Duty Style Line® Decorator LED and Tamper-Resistant with Power Indicating LED Duplex Receptacles

| Color        | Specification Grade LED |             | Spec. Grade LED & Tamper-Resistant |                | BAA Compliant   |
|--------------|-------------------------|-------------|------------------------------------|----------------|---|
|              | 15A 125V                | 20A 125V    | 15A 125V                           | 20A 125V       |   |
| Black        | SNAP2152BKL             | SNAP2162BKL | SNAP2152BKLTRA                     | SNAP2162BKLTRA | <br>SNAP2152BKLTRA |
| Blue         | SNAP2152BLL             | SNAP2162BLL | SNAP2152BLLTRA                     | SNAP2162BLLTRA |   |
| Brown        | SNAP2152L               | SNAP2162L   | SNAP2152LTRA                       | SNAP2162LTRA   |   |
| Gray         | SNAP2152GYL             | SNAP2162GYL | SNAP2152GYLTRA                     | SNAP2162GYLTRA |   |
| Ivory        | SNAP2152IL              | SNAP2162IL  | SNAP2152ILTRA                      | SNAP2162ILTRA  |   |
| Light Almond | SNAP2152LAL             | SNAP2162LAL | SNAP2152LALTRA                     | SNAP2162LALTRA |   |
| Red          | SNAP2152RL              | SNAP2162RL  | SNAP2152RLTRA                      | SNAP2162RLTRA  |   |
| White        | SNAP2152WL              | SNAP2162WL  | SNAP2152WLTRA                      | SNAP2162WLTRA  |   |



Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.

# SNAPConnect® Permanently Marked Receptacles



## Permanently Marked Standard Duplex Receptacles


### Features and Benefits

- Permanent Power Symbol Remains Clearly Visible After Installation
- Control Both Outlets per Device for 100% Controlled Applications or Just One Outlet for 50% Controlled Applications
- Part of the Hubbell Load:Logic™ Plug Control System. For Details Visit [www.hubbell-wiring.com](http://www.hubbell-wiring.com)



### Applications


- Commercial Buildings
- Retail
- Education
- Hotel Rooms



### Codes and Standards

2017 National Electric Code®



2017 Section 406.3 (E) requires that all non-locking, 125V, 15A and 20A receptacles controlled by an automatic control device or by an automatic energy management system must be marked with the  symbol.

ASHRAE Energy Efficiency Standard 90.1 2013



Standard 90.1 requires that 50 percent of all 125V, 15A and 20A receptacles in private offices, open offices and computer classrooms be controlled by an automatic control device. Controlled receptacles need to be marked to differentiate them from non-controlled receptacles.

California Title 24 2016



California Title 24 requires that in all buildings, both controlled and uncontrolled 120V receptacles shall be provided in each private office, open office area, reception lobby, conference room, kitchenette in office spaces and copy room.



SNAP5262C1R






SNAP5262C2BL



SNAP1RA

### SNAPConnect® Permanently Marked Receptacles for Use with Automatic Plug Load Controls

| Description  | Color  | 15A          | 20A          | 15A Tamper-Resistant | 20A Tamper-Resistant |
|--|--|--------------|--------------|----------------------|----------------------|
| Standard Duplex<br> One Face Controlled<br>Split Circuit Snap | Black  | SNAP5262C1BK | SNAP5362C1BK | SNAP5262C1BKTR       | SNAP5362C1BKTR       |
|  | Blue   | SNAP5262C1BL | SNAP5362C1BL | SNAP5262C1BLTR       | SNAP5362C1BLTR       |
|  | Brown  | SNAP5262C1   | SNAP5362C1   | SNAP5262C1TR         | SNAP5362C1TR         |
|  | Gray   | SNAP5262C1GY | SNAP5362C1GY | SNAP5262C1GYTR       | SNAP5362C1GYTR       |
|  | Green  | SNAP5262C1GN | SNAP5362C1GN | SNAP5262C1GNTR       | SNAP5362C1GNTR       |
|  | Ivory  | SNAP5262C1I  | SNAP5362C1I  | SNAP5262C1ITR        | SNAP5362C1ITR        |
|  | Light Almond   | SNAP5262C1LA | SNAP5362C1LA | SNAP5262C1LATR       | SNAP5362C1LATR       |
|  | Red  | SNAP5262C1R  | SNAP5362C1R  | SNAP5262C1RTR        | SNAP5362C1RTR        |
|  | White  | SNAP5262C1W  | SNAP5362C1W  | SNAP5262C1WTR        | SNAP5362C1WTR        |
|  | Standard Duplex<br>  Both Faces Controlled | Black        | SNAP5262C2BK | SNAP5362C2BK         | SNAP5262C2BKTR       |
| Blue   |  | SNAP5262C2BL | SNAP5362C2BL | SNAP5262C2BLTR       | SNAP5362C2BLTR       |
| Brown  |  | SNAP5262C2   | SNAP5362C2   | SNAP5262C2TR         | SNAP5362C2TR         |
| Gray   |  | SNAP5262C2GY | SNAP5362C2GY | SNAP5262C2GYTR       | SNAP5362C2GYTR       |
| Green  |  | SNAP5262C2GN | SNAP5362C2GN | SNAP5262C2GNTR       | SNAP5362C2GNTR       |
| Ivory  |  | SNAP5262C2I  | SNAP5362C2I  | SNAP5262C2ITR        | SNAP5362C2ITR        |
| Light Almond   |  | SNAP5262C2LA | SNAP5362C2LA | SNAP5262C2LATR       | SNAP5362C2LATR       |
| Red  |  | SNAP5262C2R  | SNAP5362C2R  | SNAP5262C2RTR        | SNAP5362C2RTR        |
| White  |  | SNAP5262C2W  | SNAP5362C2W  | SNAP5262C2WTR        | SNAP5362C2WTR        |

### Right Angle Pigtailed Terminal for SNAPConnect® Receptacles

| Description  | Wire Type | Catalog Number |
|--|-----------|----------------|
| Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material. | Solid     | SNAP1RA        |
|  | Stranded  | SNAP2RA        |

### Permanent Controlled Receptacle Label


| Description   | Catalog Number |
|---|----------------|
| For use in retrofit applications where indication of a controlled receptacle is required. This label is UL approved for marking and labeling, 60 labels of each per pack. | CL60           |



## Permanently Marked Style Line® Decorator Receptacles

### Features and Benefits

- Permanent Power Symbol Remains Clearly Visible After Installation
- Control Both Outlets per Device for 100% Controlled Applications or Just One Outlet for 50% Controlled Applications
- Part of the Hubbell Load:Logic™ Plug Control System. For Details Visit [www.hubbell-wiring.com](http://www.hubbell-wiring.com)



### Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

### Codes and Standards

2017 National Electric Code®



2017 Section 406.3 (E) requires that all non-locking, 125V, 15A and 20A receptacles controlled by an automatic control device or by an automatic energy management system must be marked with the symbol.

ASHRAE Energy Efficiency Standard 90.1 2013



Standard 90.1 requires that 50 percent of all 125V, 15A and 20A receptacles in private offices, open offices and computer classrooms be controlled by an automatic control device. Controlled receptacles need to be marked to differentiate them from non-controlled receptacles.

California Title 24 2016



California Title 24 requires that in all buildings, both controlled and uncontrolled 120V receptacles shall be provided in each private office, open office area, reception lobby, conference room, kitchenette in office spaces and copy room.

### SNAPConnect® Permanently Marked Receptacles for Use with Automatic Plug Load Controls

| Description                            | Color        | 15A          | 20A          | 15A Tamper-Resistant | 20A Tamper-Resistant |
|--|--------------|--------------|--------------|----------------------|----------------------|
| One Face Controlled Split Circuit Snap | Black        | SNAP2152C1BK | SNAP2162C1BK | SNAP2152C1BKTR       | SNAP2162C1BKTR       |
|  | Blue         | SNAP2152C1BL | SNAP2162C1BL | SNAP2152C1BLTR       | SNAP2162C1BLTR       |
|  | Brown        | SNAP2152C1   | SNAP2162C1   | SNAP2152C1TR         | SNAP2162C1TR         |
|  | Gray         | SNAP2152C1GY | SNAP2162C1GY | SNAP2152C1GYTR       | SNAP2162C1GYTR       |
|  | Green        | SNAP2152C1GN | SNAP2162C1GN | SNAP2152C1GNTR       | SNAP2162C1GNTR       |
|  | Ivory        | SNAP2152C1I  | SNAP2162C1I  | SNAP2152C1ITR        | SNAP2162C1ITR        |
|  | Light Almond | SNAP2152C1LA | SNAP2162C1LA | SNAP2152C1LATR       | SNAP2162C1LATR       |
|  | Red          | SNAP2152C1R  | SNAP2162C1R  | SNAP2152C1RTR        | SNAP2162C1RTR        |
|  | White        | SNAP2152C1W  | SNAP2162C1W  | SNAP2152C1WTR        | SNAP2162C1WTR        |
| Both Faces Controlled                  | Black        | SNAP2152C2BK | SNAP2162C2BK | SNAP2152C2BKTR       | SNAP2162C2BKTR       |
|  | Blue         | SNAP2152C2BL | SNAP2162C2BL | SNAP2152C2BLTR       | SNAP2162C2BLTR       |
|  | Brown        | SNAP2152C2   | SNAP2162C2   | SNAP2152C2TR         | SNAP2162C2TR         |
|  | Gray         | SNAP2152C2GY | SNAP2162C2GY | SNAP2152C2GYTR       | SNAP2162C2GYTR       |
|  | Green        | SNAP2152C2GN | SNAP2162C2GN | SNAP2152C2GNTR       | SNAP2162C2GNTR       |
|  | Ivory        | SNAP2152C2I  | SNAP2162C2I  | SNAP2152C2ITR        | SNAP2162C2ITR        |
|  | Light Almond | SNAP2152C2LA | SNAP2162C2LA | SNAP2152C2LATR       | SNAP2162C2LATR       |
|  | Red          | SNAP2152C2R  | SNAP2162C2R  | SNAP2152C2RTR        | SNAP2162C2RTR        |
|  | White        | SNAP2152C2W  | SNAP2162C2W  | SNAP2152C2WTR        | SNAP2162C2WTR        |



### Right Angle Pigtailed Terminal for SNAPConnect® Receptacles

| Description  | Wire Type | Catalog Number |
|--|-----------|----------------|
| Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material. | Solid     | SNAP1RA        |
|  | Stranded  | SNAP2RA        |



### Permanent Controlled Receptacle Label

| Description   | Catalog Number |
|---|----------------|
| For use in retrofit applications where indication of a controlled receptacle is required. This label is UL approved for marking and labeling, 60 labels of each per pack. | CL60           |



# SNAPConnect® Single Receptacles



## Single Receptacles

### Features and Benefits

- Single Receptacles are Available in Tamper-Resistant, Standard and Hospital Grade
- Abuse Resistant Nylon for Extra Heavy Use Applications
- Stainless Steel Autoground
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



### Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM


SNAPConnect® TR receptacles comply with the 2017 NEC® requiring Tamper-Resistant receptacles in dwelling units, child care facilities, guest rooms and guest suites (NEC® Articles: 406.4, 406.12).

### SNAPConnect® Extra Heavy Duty Hospital Grade • Single Receptacles

BAA Compliant



SNAP8310GY


| Color        | Hospital Grade • |            | Hospital Grade • Tamper-Resistant |              |  |
|--------------|------------------|------------|-----------------------------------|--------------|---|
|              | 15A 125V         | 20A 125V   | 15A 125V                          | 20A 125V     |   |
| Almond       | SNAP8210AL       | SNAP8310AL | SNAP8210ALTR                      | SNAP8310ALTR |   |
| Black        | SNAP8210BK       | SNAP8310BK | SNAP8210BKTR                      | SNAP8310BKTR |   |
| Blue         | SNAP8210BL       | SNAP8310BL | SNAP8210BLTR                      | SNAP8310BLTR |   |
| Brown        | SNAP8210         | SNAP8310   | SNAP8210TR                        | SNAP8310TR   |   |
| Gray         | SNAP8210GY       | SNAP8310GY | SNAP8210GYTR                      | SNAP8310GYTR |   |
| Ivory        | SNAP8210I        | SNAP8310I  | SNAP8210ITR                       | SNAP8310ITR  |   |
| Light Almond | SNAP8210LA       | SNAP8310LA | SNAP8210LATR                      | SNAP8310LATR |   |
| Red          | SNAP8210R        | SNAP8310R  | SNAP8210RTR                       | SNAP8310RTR  |   |
| White        | SNAP8210W        | SNAP8310W  | SNAP8210WTR                       | SNAP8310WTR  |   |

### SNAPConnect® Extra Heavy Duty Standard Single Receptacles

BAA Compliant



SNAP5261I

| Color        | Standard Duplex |            | Standard Duplex Tamper-Resistant |              |  |
|--------------|-----------------|------------|----------------------------------|--------------|---|
|              | 15A 125V        | 20A 125V   | 15A 125V                         | 20A 125V     |   |
| Almond       | SNAP5261AL      | SNAP5361AL | SNAP5261ALTR                     | SNAP5361ALTR |   |
| Black        | SNAP5261BK      | SNAP5361BK | SNAP5261BKTR                     | SNAP5361BKTR |   |
| Blue         | SNAP5261BL      | SNAP5361BL | SNAP5261BLTR                     | SNAP5361BLTR |   |
| Brown        | SNAP5261        | SNAP5361   | SNAP5261TR                       | SNAP5361TR   |   |
| Gray         | SNAP5261GY      | SNAP5361GY | SNAP5261GYTR                     | SNAP5361GYTR |   |
| Ivory        | SNAP5261I       | SNAP5361I  | SNAP5261ITR                      | SNAP5361ITR  |   |
| Light Almond | SNAP5261LA      | SNAP5361LA | SNAP5261LATR                     | SNAP5361LATR |   |
| Red          | SNAP5261R       | SNAP5361R  | SNAP5261RTR                      | SNAP5361RTR  |   |
| White        | SNAP5261W       | SNAP5361W  | SNAP5261WTR                      | SNAP5361WTR  |   |

Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.

## SNAPConnect® USB Charger Duplex Receptacles

### Features and Benefits

- 3 Amps of USB Capacity
- Charge Multiple Portable Devices Simultaneously
- Green LED Indicator Lights when Charging
- Heavy Duty Stainless Steel USB Ports; Rated for Minimum 10,000 Cord Insertions and Removals
- Works with Standard SNAPConnect® Pigtailed Connector



### Applications

- Universities
- Hotels
- Hospitals / Medical Labs
- Restaurants
- Airports
- Classrooms
- Residential

### Designed for use with

- Apple® Products
- Digital Readers
- Tablet Computers
- Smart Phones
- MP3 Players
- GPS

This outlet is capable of delivering up to 3 Amps, 5V DC of USB power. If multiple portable devices are plugged in the individual ports will allocate power as determined by the portable devices. Suitable for use on circuits with AFCI and GFCI protection.

## SNAPConnect® Extra Heavy Duty Duplex Receptacles Hospital Grade and Specification Grade



| Color        | Hospital Grade ● Tamper-Resistant |                      | Specification Grade Tamper-Resistant |                    |
|--------------|-----------------------------------|----------------------|--------------------------------------|--------------------|
|              | 15A 125V                          | 20A 125V             | 15A 125V                             | 20A 125V           |
| Black        | <b>SNAP8200USBBK</b>              | <b>SNAP8300USBBK</b> | <b>SNAP15USBBK</b>                   | <b>SNAP20USBBK</b> |
| Brown        | <b>SNAP8200USB</b>                | <b>SNAP8300USB</b>   | <b>SNAP15USB</b>                     | <b>SNAP20USB</b>   |
| Gray         | <b>SNAP8200USBGY</b>              | <b>SNAP8300USBGY</b> | <b>SNAP15USBGY</b>                   | <b>SNAP20USBGY</b> |
| Ivory        | <b>SNAP8200USBI</b>               | <b>SNAP8300USBI</b>  | <b>SNAP15USBI</b>                    | <b>SNAP20USBI</b>  |
| Light Almond | <b>SNAP8200USBLA</b>              | <b>SNAP8300USBLA</b> | <b>SNAP15USBLA</b>                   | <b>SNAP20USBLA</b> |
| Red          | <b>SNAP8200USBR</b>               | <b>SNAP8300USBR</b>  | —                                    | —                  |
| White        | <b>SNAP8200USBW</b>               | <b>SNAP8300USBW</b>  | <b>SNAP15USBW</b>                    | <b>SNAP20USBW</b>  |



### Right Angle Pigtailed Terminal for SNAPConnect® Receptacles

| Description  | Wire Type | Catalog Number |
|--|-----------|----------------|
| Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material. | Solid     | <b>SNAP1RA</b> |
|  | Stranded  | <b>SNAP2RA</b> |

# SNAPConnect® Commercial GFCI Receptacles



## Heavy Duty Commercial Ground Fault Receptacles

### Features and Benefits

- Attractive Flush Fit with Wallplate
- Shallow Box Depth - More Room for Wiring
- Assembled in USA
- Meets UL Federal Specification WC596
- TR/WR Versions Meet NEC® Code for Tamper and Weather Resistant
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



### Applications

- Healthcare Facilities
- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM



Ground Fault Indicator's flashing Red LED indicates that the receptacle has lost capacity to provide protection and needs to be replaced



### SNAPConnect® Heavy Duty Commercial Ground Fault Receptacles



| Color        | Hospital Grade ● |               | Specification Grade |               |
|--------------|------------------|---------------|---------------------|---------------|
|              | 15A 125V         | 20A 125V      | 15A 125V            | 20A 125V      |
| Almond       | GFRST82SNAPAL    | GFRST83SNAPAL | GFRST15SNAPAL       | GFRST20SNAPAL |
| Black        | GFRST82SNAPBK    | GFRST83SNAPBK | GFRST15SNAPBK       | GFRST20SNAPBK |
| Brown        | GFRST82SNAP      | GFRST83SNAP   | GFRST15SNAP         | GFRST20SNAP   |
| Gray         | GFRST82SNAPGY    | GFRST83SNAPGY | GFRST15SNAPGY       | GFRST20SNAPGY |
| Ivory        | GFRST82SNAPI     | GFRST83SNAPI  | GFRST15SNAPI        | GFRST20SNAPI  |
| Light Almond | GFRST82SNAPLA    | GFRST83SNAPLA | GFRST15SNAPLA       | GFRST20SNAPLA |
| Red          | GFRST82SNAPR     | GFRST83SNAPR  | GFRST15SNAPR        | GFRST20SNAPR  |
| White        | GFRST82SNAPW     | GFRST83SNAPW  | GFRST15SNAPW        | GFRST20SNAPW  |

### SNAPConnect® Heavy Duty Commercial Ground Fault Receptacles with Tamper-Resistant and Weather Resistant



| Color        | Hospital Grade ● |                 | Specification Grade |                 |
|--------------|------------------|-----------------|---------------------|-----------------|
|              | 15A 125V         | 20A 125V        | 15A 125V            | 20A 125V        |
| Almond       | GFTWRST82SNAPAL  | GFTWRST83SNAPAL | GFTWRST15SNAPAL     | GFTWRST20SNAPAL |
| Black        | GFTWRST82SNAPBK  | GFTWRST83SNAPBK | GFTWRST15SNAPBK     | GFTWRST20SNAPBK |
| Brown        | GFTWRST82SNAP    | GFTWRST83SNAP   | GFTWRST15SNAP       | GFTWRST20SNAP   |
| Gray         | GFTWRST82SNAPGY  | GFTWRST83SNAPGY | GFTWRST15SNAPGY     | GFTWRST20SNAPGY |
| Ivory        | GFTWRST82SNAPI   | GFTWRST83SNAPI  | GFTWRST15SNAPI      | GFTWRST20SNAPI  |
| Light Almond | GFTWRST82SNAPLA  | GFTWRST83SNAPLA | GFTWRST15SNAPLA     | GFTWRST20SNAPLA |
| Red          | GFTWRST82SNAPR   | GFTWRST83SNAPR  | GFTWRST15SNAPR      | GFTWRST20SNAPR  |
| White        | GFTWRST82SNAPW   | GFTWRST83SNAPW  | GFTWRST15SNAPW      | GFTWRST20SNAPW  |



SNAP1RA

### SNAPConnect® Right Angle Pigtailed Connector, 600V

| Description  | Wire Type | General Use    | Assembled in USA |
|--|-----------|----------------|------------------|
| Clear right angle terminal with 6 inch leads #12 AWG | Solid     | <b>SNAP1RA</b> | <b>SNAP1RNA</b>  |
| THHN/THWN-2; Polycarbonate housing material.         | Stranded  | <b>SNAP2RA</b> | <b>SNAP2RNA</b>  |

## Heavy Duty Specification Grade Surge Protection and Isolated Ground Receptacles

### Features and Benefits

- Attractive Flush Fit with Wallplate
- Shallow Box Depth - More Room for Wiring
- IG Receptacles Meet UL Federal Specification WC596
- TR Versions Meet NEC® Code for Tamper-Resistant
- SNAPConnect® Eliminates Exposed Live Terminals on the Device




### Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

### SNAPConnect® TR Surge Protection Receptacle with Power Indicating LED

| Color        | 15A 125V           | Hospital Grade ●   |                    | Specification Grade |          |
|--------------|--------------------|--------------------|--------------------|---------------------|----------|
|              |                    | 20A 125V           | 20A 125V           | 15A 125V            | 20A 125V |
| Blue         | <b>SNAP8262S</b>   | <b>SNAP8362S</b>   | <b>SNAP5262S</b>   | <b>SNAP5362S</b>    |          |
| Gray         | <b>SNAP8262GYS</b> | <b>SNAP8362GYS</b> | <b>SNAP5262GYS</b> | <b>SNAP5362GYS</b>  |          |
| Ivory        | <b>SNAP8262IS</b>  | <b>SNAP8362IS</b>  | <b>SNAP5262IS</b>  | <b>SNAP5362IS</b>   |          |
| Light Almond | <b>SNAP8262LAS</b> | <b>SNAP8362LAS</b> | <b>SNAP5262LAS</b> | <b>SNAP5362LAS</b>  |          |
| Red          | <b>SNAP8262RS</b>  | <b>SNAP8362RS</b>  | —                  | —                   |          |
| White        | <b>SNAP8262WS</b>  | <b>SNAP8362WS</b>  | <b>SNAP5262WS</b>  | <b>SNAP5362WS</b>   |          |




SNAP8362GYS

SNAP5362S

### SNAPConnect® Tamper-Resistant Isolated Ground Receptacle

| Style                      | Color  | Hospital Grade ●     |                      | Specification Grade  |                      |
|----------------------------|--------|----------------------|----------------------|----------------------|----------------------|
|                            |        | 15A 125V             | 20A 125V             | 15A 125V             | 20A 125V             |
| Duplex.                    | Orange | <b>SNAP8200IGTR</b>  | <b>SNAP8300IGTR</b>  | <b>SNAP5262IGTRA</b> | <b>SNAP5362IGTRA</b> |
|                            | Red    | <b>SNAP8200RIGTR</b> | <b>SNAP8300RIGTR</b> | —                    | —                    |
| Style Line®/<br>decorator. | Orange | <b>SNAP2172IGTR</b>  | <b>SNAP2182IGTR</b>  | <b>SNAP2152IGTRA</b> | <b>SNAP2162IGTRA</b> |
|                            | Red    | <b>SNAP2172RIGTR</b> | <b>SNAP2182RIGTR</b> | —                    | —                    |



SNAP8300RIGTR

SNAP2162IGTRA

### SNAPConnect® Isolated Ground Receptacle with Power Indicating LED

| Style                      | Color  | Hospital Grade ●    |                     | Specification Grade |                    |
|----------------------------|--------|---------------------|---------------------|---------------------|--------------------|
|                            |        | 15A 125V            | 20A 125V            | 15A 125V            | 20A 125V           |
| Duplex.                    | Orange | <b>SNAP8200IGL</b>  | <b>SNAP8300IGL</b>  | <b>SNAP5262IGL</b>  | <b>SNAP5362IGL</b> |
|                            | Red    | <b>SNAP8200RIGL</b> | <b>SNAP8300RIGL</b> | —                   | —                  |
| Style Line®/<br>decorator. | Orange | <b>SNAP2172IGL</b>  | <b>SNAP2182IGL</b>  | <b>SNAP2152IGL</b>  | <b>SNAP2162IGL</b> |
|                            | Red    | <b>SNAP2172RIGL</b> | <b>SNAP2182RIGL</b> | —                   | —                  |



SNAP8300RIGTR

SNAP2162IGTRA

### SNAPConnect® TR Isolated Ground Receptacle with Power Indicating LED

| Style                      | Color  | Hospital Grade ●      |                       | Specification Grade   |                       |
|----------------------------|--------|-----------------------|-----------------------|-----------------------|-----------------------|
|                            |        | 15A 125V              | 20A 125V              | 15A 125V              | 20A 125V              |
| Duplex.                    | Orange | <b>SNAP8200IGLTR</b>  | <b>SNAP8300IGLTR</b>  | <b>SNAP5262IGLTRA</b> | <b>SNAP5362IGLTRA</b> |
|                            | Red    | <b>SNAP8200RIGLTR</b> | <b>SNAP8300RIGLTR</b> | —                     | —                     |
| Style Line®/<br>decorator. | Orange | <b>SNAP2172IGLTR</b>  | <b>SNAP2182IGLTR</b>  | <b>SNAP2152IGLTRA</b> | <b>SNAP2162IGLTRA</b> |
|                            | Red    | <b>SNAP2172RIGLTR</b> | <b>SNAP2182RIGLTR</b> | —                     | —                     |



SNAP2172RIGLTRA

SNAP2162IGLTRA

Note: SNAPConnect® Right Angle Pigtailed Connector sold separately, see page 3 for details.





## Specification Grade Toggle Series Switches


### Features and Benefits

- Abuse Resistant Nylon Toggle for Heavy Use Applications
- Stainless Steel Autoground
- Incorporates LED Technology for Illuminated and Pilot Light
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



### Applications

- Healthcare Facilities
- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly



### SNAPConnect® Specification Grade Toggle Series

| Description               | Toggle Color | 15A, 120-277V AC    |                     | 20A, 120-277V AC    |                     |
|---------------------------|--------------|---------------------|---------------------|---------------------|---------------------|
|                           |              | Single Pole         | Three Way           | Single Pole         | Three Way           |
| SNAPConnect nylon toggle. | Black        | <b>SNAP1201BKNA</b> | <b>SNAP1203BKNA</b> | <b>SNAP1221BKNA</b> | <b>SNAP1223BKNA</b> |
|                           | Brown        | <b>SNAP1201BRNA</b> | <b>SNAP1203BRNA</b> | <b>SNAP1221BRNA</b> | <b>SNAP1223BRNA</b> |
|                           | Gray         | <b>SNAP1201GYNA</b> | <b>SNAP1203GYNA</b> | <b>SNAP1221GYNA</b> | <b>SNAP1223GYNA</b> |
|                           | Ivory        | <b>SNAP1201INA</b>  | <b>SNAP1203INA</b>  | <b>SNAP1221INA</b>  | <b>SNAP1223INA</b>  |
|                           | Light Almond | <b>SNAP1201LANA</b> | <b>SNAP1203LANA</b> | <b>SNAP1221LANA</b> | <b>SNAP1223LANA</b> |
|                           | Red          | <b>SNAP1201RNA</b>  | <b>SNAP1203RNA</b>  | <b>SNAP1221RNA</b>  | <b>SNAP1223RNA</b>  |
|                           | White        | <b>SNAP1201WNA</b>  | <b>SNAP1203WNA</b>  | <b>SNAP1221WNA</b>  | <b>SNAP1223WNA</b>  |



SNAP1201INA

### SNAPConnect® Specification Grade Illuminated Toggle Series

| Description   | Toggle Color | 15A, 120-277V AC      |           | 20A, 120-277V AC      |           |
|---|--------------|-----------------------|-----------|-----------------------|-----------|
|   |              | Single Pole           | Three Way | Single Pole           | Three Way |
| Illuminated Blue LED, light ON with load OFF, toggle. | Black        | <b>SNAP1201ILBKNA</b> | —         | <b>SNAP1221ILBKNA</b> | —         |
|   | Ivory        | <b>SNAP1201ILINA</b>  | —         | <b>SNAP1221ILINA</b>  | —         |
|   | Red          | <b>SNAP1201ILRNA</b>  | —         | <b>SNAP1221ILRNA</b>  | —         |
|   | White        | <b>SNAP1201ILWNA</b>  | —         | <b>SNAP1221ILWNA</b>  | —         |



SNAP1221ILWNA

### SNAPConnect® Specification Grade Pilot Light Toggle Series

| Description                                   | Toggle Color | 15A, 120-277V AC      |           | 20A, 120-277V AC      |           |
|---|--------------|-----------------------|-----------|-----------------------|-----------|
|   |              | Single Pole           | Three Way | Single Pole           | Three Way |
| Pilot Red LED, light ON with load ON, toggle. | Black        | <b>SNAP1201PLBKNA</b> | —         | <b>SNAP1221PLBKNA</b> | —         |
|   | Ivory        | <b>SNAP1201PLINA</b>  | —         | <b>SNAP1221PLINA</b>  | —         |
|   | Red          | <b>SNAP1201PLRNA</b>  | —         | <b>SNAP1221PLRNA</b>  | —         |
|   | White        | <b>SNAP1201PLWNA</b>  | —         | <b>SNAP1221PLWNA</b>  | —         |



SNAP1201PLINA

### SNAPConnect® Jumper/Tester

| Description                                      | 20A, 120-277V AC  |                   |
|--|-------------------|-------------------|
|  | Single Pole       | Three Way         |
| Jumper/Tester, Black toggle, Blue LED indicator. | <b>SNAPSWJUMP</b> | <b>SNAP3WJUMP</b> |



SNAPSWJUMP

### SNAPConnect® Switch Pigtailed Connector

| Description   | Wire Type | 20A, 120-277V AC      |                        |                    |
|---|-----------|-----------------------|------------------------|--------------------|
|   |           | Single Pole (3 Wires) | Single Pole with Pilot | 3 Way (4 Wires)    |
| Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material. | Solid     | <b>SNAPSP1NA</b>      | <b>SNAPSPP1NA</b>      | <b>SNAP3W1NA</b>   |
|   |           | <b>SNAPSP1NAM2</b>    | <b>SNAPSPP1NAM2</b>    | <b>SNAP3W1NAM2</b> |
|   | Stranded  | <b>SNAPSP2NA</b>      | <b>SNAPSPP2NA</b>      | <b>SNAP3W2NA</b>   |
|   |           | <b>SNAPSP2NAM2</b>    | <b>SNAPSPP2NAM2</b>    | <b>SNAP3W2NAM2</b> |

## Specification Grade Decorator Series Switches

### Features and Benefits

- Abuse Resistant Thermoplastic Rocker for Heavy Use Applications
- Stainless Steel Autoground
- Incorporates LED Technology for Illuminated and Pilot Light
- Assembled in USA
- SNAPConnect® Eliminates Exposed Live Terminals on the Device



### Applications

- Healthcare Facilities
- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly

### SNAPConnect® Specification Grade Style Line® Decorator Series

| Description         | Toggle Color | 15A, 120-277V AC    |                     | 20A, 120-277V AC    |                     |
|---------------------|--------------|---------------------|---------------------|---------------------|---------------------|
|                     |              | Single Pole         | Three Way           | Single Pole         | Three Way           |
| SNAPConnect rocker. | Black        | <b>SNAP2101BKNA</b> | <b>SNAP2103BKNA</b> | <b>SNAP2121BKNA</b> | <b>SNAP2123BKNA</b> |
|                     | Brown        | <b>SNAP2101BRNA</b> | <b>SNAP2103BRNA</b> | <b>SNAP2121BRNA</b> | <b>SNAP2123BRNA</b> |
|                     | Gray         | <b>SNAP2101GYNA</b> | <b>SNAP2103GYNA</b> | <b>SNAP2121GYNA</b> | <b>SNAP2123GYNA</b> |
|                     | Ivory        | <b>SNAP2101INA</b>  | <b>SNAP2103INA</b>  | <b>SNAP2121INA</b>  | <b>SNAP2123INA</b>  |
|                     | Light Almond | <b>SNAP2101LANA</b> | <b>SNAP2103LANA</b> | <b>SNAP2121LANA</b> | <b>SNAP2123LANA</b> |
|                     | Red          | <b>SNAP2101RNA</b>  | <b>SNAP2103RNA</b>  | <b>SNAP2121RNA</b>  | <b>SNAP2123RNA</b>  |
|                     | White        | <b>SNAP2101WNA</b>  | <b>SNAP2103WNA</b>  | <b>SNAP2121WNA</b>  | <b>SNAP2123WNA</b>  |



SNAP2101INA

### SNAPConnect® Specification Grade Illuminated Style Line® Decorator Series

| Description   | Toggle Color | 15A, 120-277V AC      |                       | 20A, 120-277V AC      |                       |
|---|--------------|-----------------------|-----------------------|-----------------------|-----------------------|
|   |              | Single Pole           | Three Way             | Single Pole           | Three Way             |
| Illuminated Blue LED, light ON with load OFF, rocker. | Black        | <b>SNAP2101ILBKNA</b> | <b>SNAP2103ILBKNA</b> | <b>SNAP2121ILBKNA</b> | <b>SNAP2123ILBKNA</b> |
|   | Ivory        | <b>SNAP2101ILINA</b>  | <b>SNAP2103ILINA</b>  | <b>SNAP2121ILINA</b>  | <b>SNAP2123ILINA</b>  |
|   | Red          | <b>SNAP2101ILRNA</b>  | <b>SNAP2103ILRNA</b>  | <b>SNAP2121ILRNA</b>  | <b>SNAP2123ILRNA</b>  |
|   | White        | <b>SNAP2101ILWNA</b>  | <b>SNAP2103ILWNA</b>  | <b>SNAP2121ILWNA</b>  | <b>SNAP2123ILWNA</b>  |



SNAP2103ILWNA

### SNAPConnect® Specification Grade Pilot Light Style Line® Decorator Series

| Description                                   | Toggle Color | 15A, 120-277V AC      |           | 20A, 120-277V AC      |           |
|---|--------------|-----------------------|-----------|-----------------------|-----------|
|   |              | Single Pole           | Three Way | Single Pole           | Three Way |
| Pilot Red LED, light ON with load ON, rocker. | Black        | <b>SNAP2101PLBKNA</b> | —         | <b>SNAP2121PLBKNA</b> | —         |
|   | Ivory        | <b>SNAP2101PLINA</b>  | —         | <b>SNAP2121PLINA</b>  | —         |
|   | Red          | <b>SNAP2101PLRNA</b>  | —         | <b>SNAP2121PLRNA</b>  | —         |
|   | White        | <b>SNAP2101PLWNA</b>  | —         | <b>SNAP2121PLWNA</b>  | —         |



SNAP2121PLINA

### SNAPConnect® Switch Pigtailed Connector

| Description   | Wire Type | 15A, 120-277V AC                       |  |  |
|---|-----------|--|--|--|
|   |           | Single Pole (3 Wires)                  | Single Pole with Pilot                   | 3 Way (4 Wires)                        |
| Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material. | Solid     | <b>SNAPSP1NA</b><br><b>SNAPSP1NAM2</b> | <b>SNAPSPP1NA</b><br><b>SNAPSPP1NAM2</b> | <b>SNAP3W1NA</b><br><b>SNAP3W1NAM2</b> |
|   | Stranded  | <b>SNAPSP2NA</b><br><b>SNAPSP2NAM2</b> | <b>SNAPSPP2NA</b><br><b>SNAPSPP2NAM2</b> | <b>SNAP3W2NA</b><br><b>SNAP3W2NAM2</b> |



## Healthcare and Education Product Solutions



Hubbell's in-depth virtual tours are designed to graphically and innovatively demonstrate where and how Hubbell's full line of wiring devices for power, data, voice and multimedia are deployed.

### Hubbell Education Facilities eTour

This virtual tour of an education campus encompasses many different buildings and unique spaces. There are over 140 Hubbell product application solutions demonstrated throughout.



### Hubbell Healthcare eTour

Users can navigate their way through nine specific areas of a virtual hospital. There are 20 unique spaces where Hubbell product solutions are identified at work.

## Available Literature

Hubbell offers an extensive literature library for product support. Downloadable PDFs are available on line.



Education Application Guide



Healthcare Application Guide



Installation Efficiency Guide



Entertainment Product Solution Guide