

# LITEPAK SERIES LNC3

Cat.#

Job

Type



**HUBBELL**  
Outdoor Lighting

Approvals

### SPECIFICATIONS

#### Intended Use:

The mid-sized LNC3 is designed for perimeter illumination for safety, security and identity. No uplight and lower glare lens option offer neighbor friendly lighting at typical mounting heights of 8-20'. Units have protective polyester finish for long lasting appearance. Ideal for schools, factories, hospitals, warehouses and retail applications. Energy efficient LEDs provide 70%+ energy savings with little to no maintenance when compared to traditional light sources.

#### Construction:

Die-cast aluminum housing protects components and provides an architectural appearance. Casting thermally conducts LED heat to optimize performance and long life. Powder paint finish provides durability in outdoor environments. Four 1/2" conduit entries (top, bottom, and sides) provided for surface conduit.

#### Electrical:

- 120-277, 347 and 480 voltage, 50/60Hz, 0-10V dimming drivers
- Electronic driver
- 10kA surge protection

#### LED(s) CCT:

- Ambient operating temperature -40°C to 40°C
- 3000K, 4000K and 5000K CCT nominal with 70 CRI
- Available in 2 or 24 LED configuration, see page 2 for electrical and photometric data

#### Lenses:

- Zero uplight distributions using individual acrylic LED optics provide IES type II, III and IV distributions
- CS - Frosted acrylic diffuser option for reduced glare
- CSU - Frosted acrylic diffuser for inverted "up" mounting applications (lens required)

#### Lumen Maintenance:

L89 at 60,000 hrs (Projected per IESNA TM-21-11), see table on page 2 for all values

#### Installation:

Quick-mount adapter with gasket seal provides easy installation to wall or to recessed junction box (4" square junction box). Fixture attaches by two Allen-head hidden fasteners for tamper resistance.

Designed for direct j-box mount or conduit feed on all four sides in single SKU.

#### Options/Controls:

- Button photocontrol for dusk to dawn energy savings
- 7-pin photo-receptacle available for twist lock photocell and controls by others
- Occupancy sensor options available for complete on/off and dimming control
- SiteSync pre-commissioned wireless controls (with or without sensor)
- In addition, LITEPAK can be specified with SiteSync™ wireless control system for reduction in energy and maintenance cost while optimizing light quality 24/7. See ordering information or visit [www.hubbellighting.com/sitesync](http://www.hubbellighting.com/sitesync) for more details.

#### Listings:

- DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at [www.designlights.org](http://www.designlights.org)
- Listed to UL1598 and CSAC22.2#250.0-24 for wet locations
- IP65 Assembly • IDA Approved (3000K configurations)


#### Warranty:

Five year limited warranty (for more information visit: <http://www.hubbelloutdoor.com/resources/warranty/>)

### PRODUCT IMAGE(S)



### DIMENSIONS

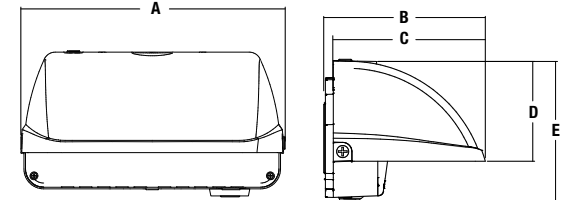

A	B	C	D	E	Weight / BBU
13"	10.5"	9.9"	5.8"	8.3"	18 lbs.
330.2 mm	266.7 mm	251 mm	147.3 mm	210.8 mm	8.2 kg

### CERTIFICATIONS/LISTINGS



\*3000K and warmer CCTs only

### ORDERING INFORMATION – ORDERING EXAMPLE: LNC3-24L-3K-105-2-1-DB-7PR-SCP

FAMILY	NUMBER OF LEDS	CCT	DRIVE CURRENT	IES DISTRIBUTION	VOLTAGE	FINISH	CONTROL OPTIONS	OPTIONS
LNC3	24L 24LEDs	3K 3000K 4K 4000K 5K 5000K	035 350mA 050 500mA 075 750mA 105 1050mA	2 Type II 3 Type III 4 Type IV	U 120v-277v 1 120v <sup>1</sup> 2 208v <sup>1</sup> 3 240v <sup>1</sup> 4 277v <sup>1</sup> 5 480v <sup>1</sup> F 347v <sup>1</sup>	DB Bronze BL Black WH White GR Gray PS Platinum CC Custom Color	PCU Universal Button PC 7PR <sup>6</sup> 7pin PCR SCP <sup>3,4</sup> Programmable occupancy sensor SWP <sup>1,7</sup> SiteSync pre-commissioned SWPM <sup>1,4,7,8</sup> SiteSync pre-commissioned w/ occupancy sensor	F <sup>1</sup> Fusing (must specify voltage per footnote) CS Frosted acrylic diffuser CSU <sup>2</sup> Inverted/Up mounting frosted acrylic diffuser (required for up/inverted fixture installations, factory install only see page 3) E <sup>1,5</sup> Integral battery backup rated for 0° EH <sup>1,5</sup> Integral battery backup with heater rated for -30°C 2DR <sup>9</sup> Dual Drivers

<sup>1</sup> Must specify voltage (battery backup 120 or 277V only, SiteSync 120, 277 or 347V only)  
<sup>2</sup> Factory Install Only. Not available with SCP or SWPM sensor/control options  
<sup>3</sup> Must order minimum of one remote control to program dimming settings, 0-10V fully adjustable dimming with automatic daylight calibration and different time delay settings, 120-277V only.  
<sup>4</sup> PCU option not applicable, included in sensor (8F = up to 8ft, 20F = up to 20ft)  
<sup>5</sup> 350mA, 500mA & 750mA versions only. Not available with F, SWP or SWPM options.  
<sup>6</sup> Accepts standard 3, 5, and 7-Pin ANSI controls (by others). Not available with PCU, SWP or SWPM control options  
<sup>7</sup> Must specify group and zone information at time or order. See [www.HubbellLighting.com/products/sitesync](http://www.HubbellLighting.com/products/sitesync) for future details  
<sup>8</sup> Specify time delay, dimming level and mounting height  
<sup>9</sup> 1050mA version only, not available with 347/480V

### STOCK ORDERING INFORMATION – 2L COB MODELS

CATALOG NUMBER	DESCRIPTION	DISTRIBUTION	WATTAGE	LUMENS	LPW	VOLTAGE	# OF DRIVERS @ DRIVE CURRENT	WEIGHTS LBS. (KGS)
LNC3-2L4K-075	2 LED - 60W Configuration, 4000K, Dark Bronze	Type IV	62.0	5,857	94.8	120-277	1 @ 750mA	16(7.3)
LNC3-2L4K-105	2 LED - 90W Configuration, 4000K, Dark Bronze		87.4	7,721	86.1		1 @ 1050mA	
LNC3-2L5K-105	2 LED - 90W Configuration, 5000K, Dark Bronze		87.4	7,288	82.0		1 @ 1050mA	
LNC3-2L4K-105-7PR	2 LED - 90W Configuration, 4000K, Dark Bronze, 7-Pin		87.4	7,721	86.1		1 @ 1050mA	
LNC3-2L4K-105-SCP	2 LED - 90W Configuration, 4000K, Dark Bronze, SCP		87.4	7,721	86.1		1 @ 1050mA	



Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • Phone: 864-678-1000

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

© 2017 HUBBELL OUTDOOR LIGHTING, All Rights Reserved • For more information visit our website: [www.hubbelloutdoor.com](http://www.hubbelloutdoor.com) • Printed in USA LNC3-SPEC FEBRUARY 14, 2018 3:40 PM

## REPLACEMENT PART/ACCESSORIES

CATALOG NUMBER	DESCRIPTION
LNC3-CS	Frosted acrylic diffuser reduces surface brightness and glare with a roughly 20% lumen reduction
SCP-REMOTE	Remote control for SCP option. Order at least one per project to program and control fixtures
SWUSB*	SiteSync interface software loaded on USB flash drive for use with owner supplied PC (Windows based only). Includes SiteSync license, software and USB radio bridge node
SWTAB*	Windows tablet and SiteSync interface software. Includes tablet with preloaded software, SiteSync license and USB radio bridge node
SWBRG*	SiteSync USB radio bridge node only. Order if a replacement is required or if an extra bridge node is requested

\* When ordering SiteSync at least one of these two interface options must be ordered per project.

\* If needed, an additional Bridge Node can be ordered.

## Hubbell Control Solutions - Accessories (sold separately)

Catalog Number	Description	HCS System
NXOFM-1R1D-UNV	On-fixture Module (7-pin), On / Off / Dim, Daylight Sensor with HubbNET Radio and Bluetooth® Radio, 120-480VAC	NX Distributed Intelligence™
WIR-RME-L	On-fixture Module (7-pin or 5-pin), On / Off / Dim, Daylight Sensor with wiSCAPE Radio, 110-480VAC	wiSCAPE™ Lighting Control

For additional information related to these accessories please visit [www.hubbellcontrolsolutions.com](http://www.hubbellcontrolsolutions.com). Options provided for use with integrated sensor, please view specification sheet ordering information table for details.

## PERFORMANCE DATA

# OF LEDS	DRIVE CURRENT	SYSTEM WATTS	DIST. TYPE	5K (5000K nominal, 70 CRI)					4K (4000K nominal, 70 CRI)					3K (3000K nominal, 70 CRI)						
				LUMENS	LPW <sup>1</sup>	B	U	G	LUMENS	LPW <sup>1</sup>	B	U	G	LUMENS	LPW <sup>1</sup>	B	U	G		
4	N/A	N/A	E	671	-	-	-	-	657	-	-	-	-	591	-	-	-	-		
				2	3,212	115	1	0	1	3,145	113	1	0	1	2,991	107	1	0	1	
				3	3,160	113	1	0	1	3,094	111	1	0	1	2,944	106	1	0	1	
	24	350mA	28	E	4	3,182	114	1	0	1	3,116	112	1	0	1	2,964	106	1	0	1
					2	4,143	101	1	0	2	4,057	99	1	0	2	3,858	94	1	0	2
					3	4,076	99	1	0	1	3,991	97	1	0	1	3,797	93	1	0	1
					4	4,104	100	1	0	1	4,019	98	1	0	1	3,823	93	1	0	1
		500mA	41	E	2	5,918	99	1	0	2	5,795	97	1	0	2	5,512	92	1	0	2
					3	5,823	97	1	0	2	5,702	95	1	0	2	5,424	90	1	0	2
					4	5,863	98	1	0	2	5,741	96	1	0	2	5,461	91	1	0	2
					2	7,630	92	2	0	2	7,472	90	2	0	2	7,107	86	2	0	2
		750mA	60	E	3	7,508	90	1	0	2	7,352	89	1	0	2	6,993	84	1	0	2
					4	7,559	91	1	0	2	7,402	89	1	0	2	7,041	85	1	0	2
					2	7,630	92	2	0	2	7,472	90	2	0	2	7,107	86	2	0	2
					3	7,508	90	1	0	2	7,352	89	1	0	2	6,993	84	1	0	2
	1050mA	83	E	4	7,559	91	1	0	2	7,402	89	1	0	2	7,041	85	1	0	2	

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Actual performance may differ as a result of end-user environment and application.

## ELECTRICAL DATA

# OF LEDS	DRIVE CURRENT (mA)	INPUT VOLTAGE (V)	CURRENT (Amps)	SYSTEM POWER (w)
24	350mA	120	0.23	28
		277	0.10	28
		347	0.08	28
		480	0.06	28
	500mA	120	0.34	41
		277	0.15	41
		347	0.12	41
		480	0.09	41
	750mA	120	0.50	60
		277	0.22	60
		347	0.17	60
		480	0.13	60
	1050mA	120	0.69	83
		277	0.30	83
		347	0.24	83
		480	0.17	83

## PROJECTED LUMEN MAINTENANCE

Ambient Temp.	OPERATING HOURS					
	0	25,000	50,000	TM-21-11 <sup>1</sup> L96 60,000	100,000	L70 (hours)
25°C / 77°F	1.00	0.97	0.94	0.93	0.89	>296,000
40°C / 104°F	1.00	0.95	0.91	0.89	0.83	>191,000

1. Projected per IESNA TM-21-11 \* (Nichia 219C, 1050mA, 85°C, 10,000 hrs)

Data references the extrapolated performance projections for the LNC3-24L-105 base model in a 40°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.

## LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF)

AMBIENT TEMPERATURE	LUMEN MULTIPLIER	
0° C	32° F	1.02
10° C	50° F	1.01
20° C	68° F	1.00
25° C	77° F	1.00
30° C	86° F	1.00
40° C	104° F	0.99

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).



**HUBBELL**  
Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • Phone: 864-678-1000

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

© 2017 HUBBELL OUTDOOR LIGHTING. All Rights Reserved • For more information visit our website: [www.hubbelloutdoor.com](http://www.hubbelloutdoor.com) • Printed in USA LNC3-SPEC FEBRUARY 14, 2018 3:40 PM

**CSU – INVERTED MOUNTING OPTION**  
(Requires Factory Installed lens option)



Inverted mounting capabilities for uplighting applications. Specially designed frosted acrylic diffuser option softens output, improves uniformity and protects LED lenses.

**7PR-7-PIN RECEPTACLE**  
(Photocontrol and Wireless Controls by Others)



Standard NEMA 7-Pin receptacle for twist lock photocell or wireless controls (by others).

**SCP - Programmable Occupancy Sensor**




Sensor offers greater control and energy savings with SCP programmable sensor with adjustable delay and dimming levels (Factory default is 10%)

Visit: <http://www.hubbellighting.com/solutions/controls/> for control application information


**PHOTOMETRICS**

Mounting Height 15ft

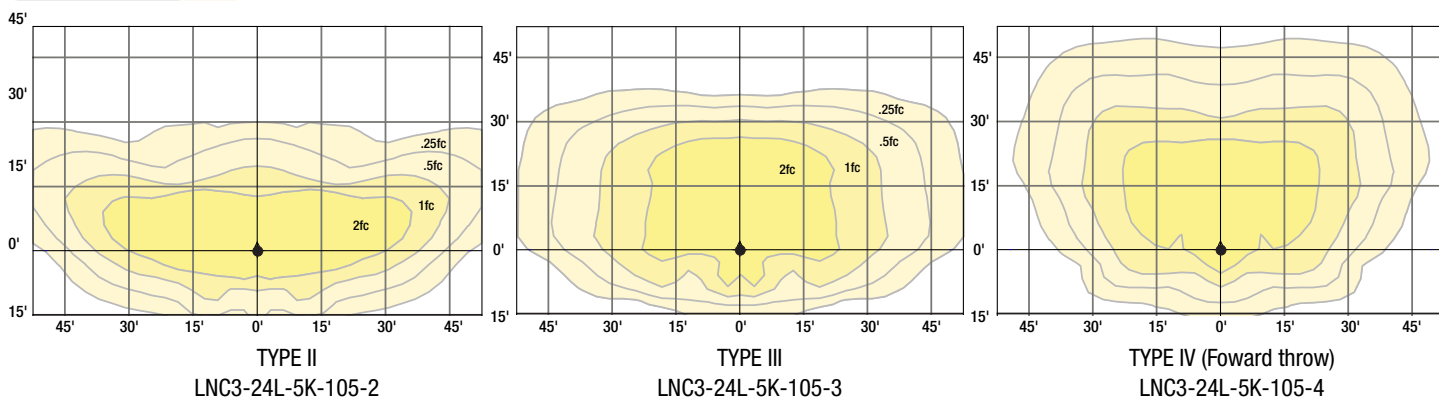

**PHOTOMETRICS - BATTERY BACK UP**

**E & EH EMERGENCY BATTERY BACKUP**

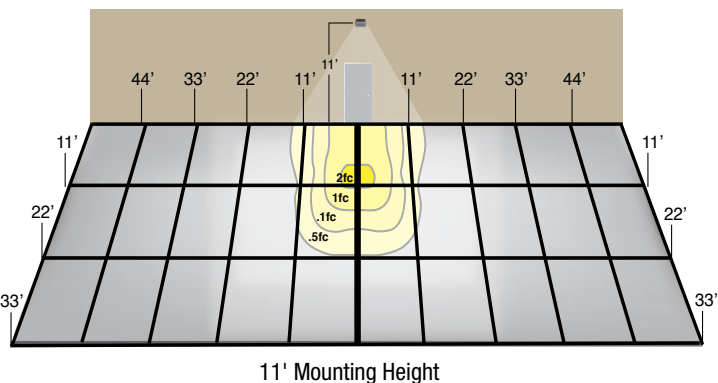

24 High Power LEDs generate up to 6,000 lumens in Normal Mode, and use 4 LEDs for up to 700 lumens in emergency.

Provides Life Safety Code average illuminance of 1.0 fc. Assumes open space with no obstructions and mounting height of 11'.

Diagrams for illustration purposes only, please consult factory for application layout.

**SWP & SWPM - SiteSync™**



SiteSync Lighting Control is available from our most popular brands in a broad range of award-winning product families.

**Precommissioned SiteSync Ordering Information:**

When ordering a fixture with the SiteSync lighting control option, additional information will be required to complete the order. The SiteSync Commissioning Form or alternate schedule information must be completed. This form includes Project locations Group information, and Operating schedules. For more detailed information please visit [www.HubbellLighting.com/products/sitesync](http://www.HubbellLighting.com/products/sitesync) or contact Hubbell Lighting tech support at (800) 345-4928.

SiteSync fixtures with occupancy sensor (SWPM) require the mounting height of the fixture selection of the lens.

Examples: LNC3-24L-4K-075-3-U-BL-SWP  
LNC3-24L-4K-075-3-U-BL-SWPM-20F

SiteSync only  
SiteSync with Motion Control



**HUBBELL**  
Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • Phone: 864-678-1000

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

© 2017 HUBBELL OUTDOOR LIGHTING, All Rights Reserved • For more information visit our website: [www.hubbelloutdoor.com](http://www.hubbelloutdoor.com) • Printed in USA LNC3-SPEC FEBRUARY 14, 2018 3:40 PM