



Series CPS-LSHB Lumen Smart Highbays 200W

CPS-LSHB-200W-UH-40

CPS-LSHB-200W-UH-50

CPS-LSHB-200W-UL-40

CPS-LSHB-200W-UL-50

Application

- Bus station
- Basketball court
- Badminton court
- Warehouse
- Airport
- Supermark



Superiority

- Fast and easy installation to replace existing led high bay and 400W HID high bay
- Up to 50% energy saving compared to HID high bay
- Lower maintenance cost thanks to over 3 times longer lifetime


Features

- Up to 130 lm/w
- High CRI >80
- Meanwell HLG driver, UL SAA CE RoHS certificate, PF>0.9, THD<20
- Flicker free by camera
- Environmentally friendly, No mercury, No UV, No IR
- IP65, indoor and outdoor using
- Energy Efficiency Grade: A++
- 5-year-warranty
- Quick Start instant 100% luminous flux

Technical Data

Electrical date	
Watts	200W
Input voltage	90-305V~
Frequency range	50/60Hz
Photometric	
CCT	4000K-5700K
Luminous flux	26400lm
CRI	>80
Color and material	
Body	AL6063 anodize/stoving varnish
Cover	PC milky
Certification and standards	
Level of protection	IP65
Approval standards	DLC UL CE RoHS SAA
Dimensions and Weight	
Size	1500x166x77mm
Weight	7.9kg
Packet	
Carton size	1555x220x215mm
Qty/Carton	2PCS
N.W	15.8kg
G.W	18.3kg

Dimension

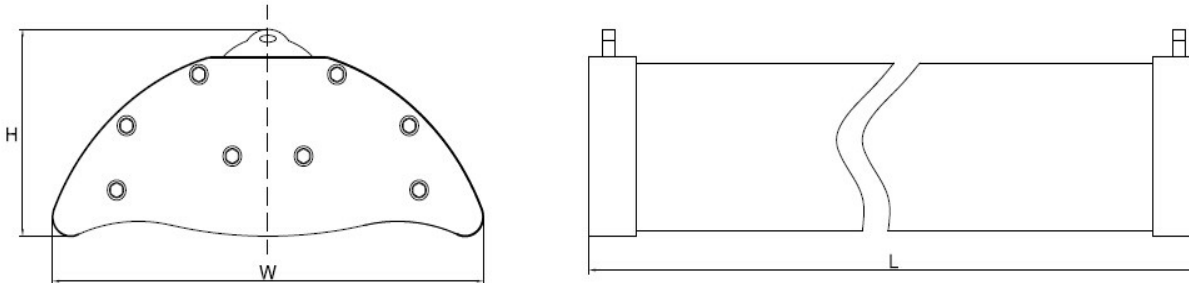

Model Name	L(Norm)	W(Norm)	H(Norm)	Net Weight: 7.9kg
CPS-LSHB-200W-UL	1500mm	166mm	77mm	

Electrical and Technical Data

Model No	Size	Watts	Input Voltage	LED Qty	Luminous flux	CCT	Cover	CRI	PF	THD	lifetime
CPS-LSHB-200W-UL-40					25700lm	4000k					
CPS-LSHB-200W-UL-50	1500x166x77mm	200W	90-305V~ 50/60HZ	480	26400lm	5000K	Milky	>80	>0.9	<20	>50000hrs

Series CPS-LSHB Lumen Smart Highbays 1.5M 200W

www.cpsled.com

CPS-LSHB-200W-UL-50				26500lm	5700k				
---------------------	--	--	--	---------	-------	--	--	--	--
