

HUBBELL OUTDOOR LIGHTING

combines innovative technology with practical lighting solutions and service oriented performance based on in-depth knowledge of the electrical distributor and contractor markets.

OUTDOOR TABLE OF CONTENTS


FLOODLIGHT BEAM SPREAD GUIDE..... 37	WALLPACKS MOUNTING HEIGHT GUIDE..... 42	PATROLMAN 48
ALF 6/12..... 38	SLING WALLPACKS..... 43	DUSK-TO-DAWN PRODUCT SELECTION GUIDE..... 49
COLT LBUL..... 38	WGH..... 44	SLING CANOPY..... 50
MINI COLT..... 39	PRS..... 45	CANOPY PRODUCT SELECTION GUIDE..... 51
MARSHAL..... 39	NRG® 300L..... 45	VAPORTITES 52
FLOODLIGHT PRODUCT SELECTION GUIDE..... 40	WALLPACKS PRODUCT SELECTION GUIDE..... 46	VAPORTITES PRODUCT SELECTION GUIDE..... 53
	SLING SGD DUSK-TO-DAWN..... 48	



FLOODLIGHT


BEAM SPREAD GUIDE

AVAILABLE BEAM SPREAD

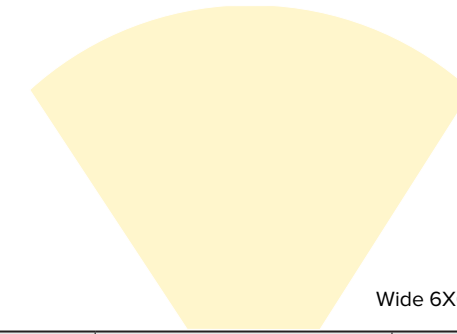

MODEL	Colt Mini MBUL	Marshal	Colt LBUL	ALF6 ALF12	SG1 SG2
EQUIVALENCY	70WHID	2-70W	100W	70W 100W	100W 250W
LUMENS	1100lm	2100lm	2339lm 2468lm	1100lm 2300lm	1500-8000lm
WATTS	13W	26.6W	20W	10W 21W	21-29W 51-80W

Not all configurations and outputs shown, please visit website for the most up-to-date information. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

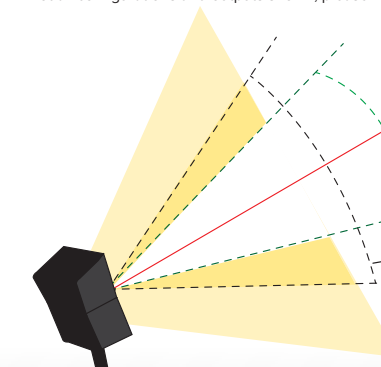

Center Beam Axis @ 0°
(typically max beam intensity measured as Center Beam Candle Power / CBCP)

Beam Angle
(angle within the beam of light equal to 50% of the max beam intensity)

Field Angle
(angle within the beam of light equal to 10% of the max beam intensity)


NEMA BEAM SPREAD CLASSIFICATION

Beam Spread Degrees (Field Angle)	NEMA Type	Beam Description
10° up to 18°	1	Very Narrow
18°-29°	2	Narrow
29°-46°	3	Medium Narrow
46°-70°	4	Medium
70°-100°	5	Medium Wide
100°-130°	6	Wide
130° and up	7	Very Wide

ALF 6/12

ARCHITECTURAL FLOODLIGHT

A versatile LED floodlight perfect for illuminating signs, trees and entrances or small area illumination. It features an adjustable knuckle pivot from 0–75°, wide 6X5 flood distribution and tempered glass lens.

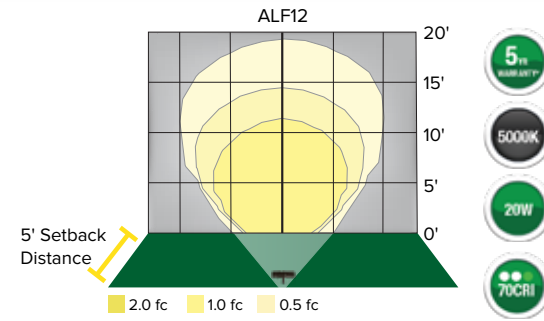

Fixture	Length	Width	Height	Weight
ALF6	12.0in.	1.5in.	7.0in.	4.0lbs.
ALF12	24.0in.	1.5in.	7.0in.	8.0lbs.


- 5 yr WARRANTY
- 5000K
- 20W
- 70CRI

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Locations				Ctn Qty	Equivalency
						CA	GA	IL	NJ		
ALF 6											
ALF6LU5KBZ	ALF-6LU-5K-BZ	785988019168	1122	20W	5000K	2	100W
ALF 12											
ALF12LU5KBZ	ALF-12LU-5K-BZ	785988020713	2303	20W	5000K	1	100W

COLT LBUL

MINI LED BULLET

Versatile compact LED floodlight perfect for a variety of applications including: landscape, accent, pole/column, facade and small area illumination. Stake or threaded mounting plus adjustable knuckle provides mounting flexibility. Durable die-cast design with corrosion resistant powder coat paint finish for years of maintenance free illumination.

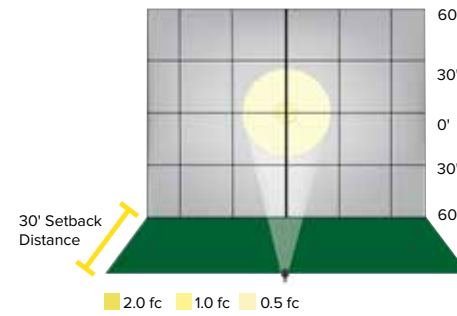

Length	Width	Height	Weight
7.6 in.	4.3 in.	7.3 in.	1.5 lbs.


- 5 yr WARRANTY
- 3500K/4000K
- 20W
- 70CRI

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency	DLC Listing
						CA	GA	IL	NJ			
93116281	LBUL-20-120-3K	840141419886	2339	20W	3000K	576	100W	PENXQ5T4
93116282	LBUL-20-120-4K	840141419893	2468	20W	4000K	576	100W	PEQBBGRQ

MINI COLT

MINI LED BULLET

Versatile compact LED floodlight perfect for a variety of applications including: landscape, accent, pole/column, facade and small area illumination. Stake or threaded mounting and an adjustable knuckle provides mounting flexibility. Durable die-cast design with corrosion resistant powder coat paint finish for years of maintenance free illumination.

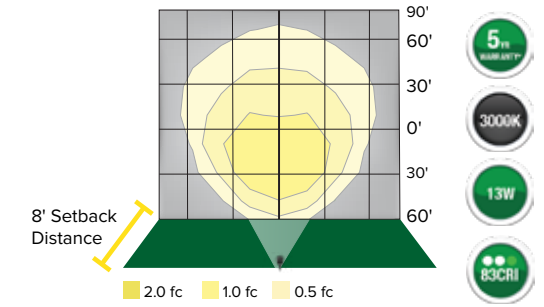

Length	Width	Height	Weight
3.9in.	3.2in.	6.2in.	2.0lbs.


- 5 yr WARRANTY
- 3000K
- 13W
- 83CRI

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency
						CA	GA	IL	NJ		
MBUL1L3K1	MBUL-1L3K-1	785988031955	1115	13W	3000K	12	100W

MARSHAL

SECURITY FLOOD

Attractive security floodlight with 180° motion sensor with a coverage area of 72 feet. A powerful LED system saves energy and maintenance. The sensor includes time, sensitivity and distance adjustments.

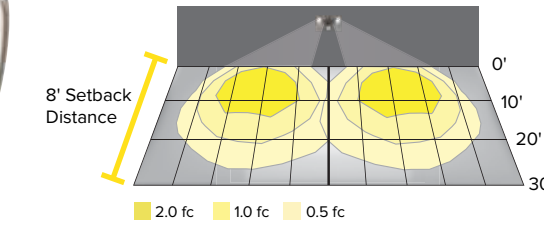




Fixture	Length	Width	Height	Weight
ML	12.75in.	-	5.0 in.	2.2lbs.
MS	6.0in.	0.25in.	0.2in.	0.5lbs.


- 5 yr WARRANTY
- 3000K
- 26W
- 83CRI

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency
						CA	GA	IL	NJ		
ML2L3K1DB	ML-2L3K-1-DB	785988032723	2104	26W	3000K	144	100W
ML2L3K1WH	ML-2L3K-1-WH	785988032730	2104	26W	3000K	144	100W
Motion Sensor Only											
MSDB	MS-DB	785988032952	-	-	-	-	-
MSWH	MS-WH	785988032969	-	-	-	-	-

FLOODLIGHTS

PRODUCT SELECTION GUIDE


		GOOD			BETTER					
		tradeSELECT®			tradeSELECT®					
										
		Colt Mini			Marshal			Colt LBUL		
FEATURES	Easy to Install	Yes			Yes			Yes		
	Mounting Options	½" 14 NPS			Junction box			½" 14 NPS		
	Features	+			+			++		
	Maintenance	Low, Aiming			Low, Aiming			Low, Aiming		
PERFORMANCE	Lumens	1115			2104			2339–2468		
	Watts	13W			20W			20W		
	Efficacy (maximum LPW)	85			100			115–122		
	Distribution	NEMA 6X6 Wide			NEMA 6X6 Wide			NEMA 6X7 Wide		
	CCT	3000K			3000K			3000K, 4000K		
	CRI	70			80			70		
	Certifications	Listed for Wet Locations	UL1598	IP65	Listed for Wet Locations	UL1598	IP65	Listed for Wet Locations	UL1598	IP65
			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Product Life	60,000hrs.			60,000hrs.			60,000 hrs.		
	HID Equivalence	70W			100W			100W		
Energy Savings (Based on HID Equivalence)	86%			85%			83%			
Voltage	120V			120V			120V			
CONTROLS	Basic occupancy	–			Yes			–		
	Occupancy and Daylight Harvesting	–			Yes			–		

BEST			
tradeSELECT®			
			
ALF 6/12			
Yes			
½" 14 NPS			
++			
Med, Aiming, Adjustment			
1122, 2303			
26W			
85			
NEMA 6X6 Wide			
5000K			
70			
Listed for Wet Locations	UL1598	IP65	
Yes	Yes	Yes	Yes
60,000hrs.			
120W			
86%			
120V			
Yes			
Yes			



WALL PACK

MOUNTING HEIGHT GUIDE

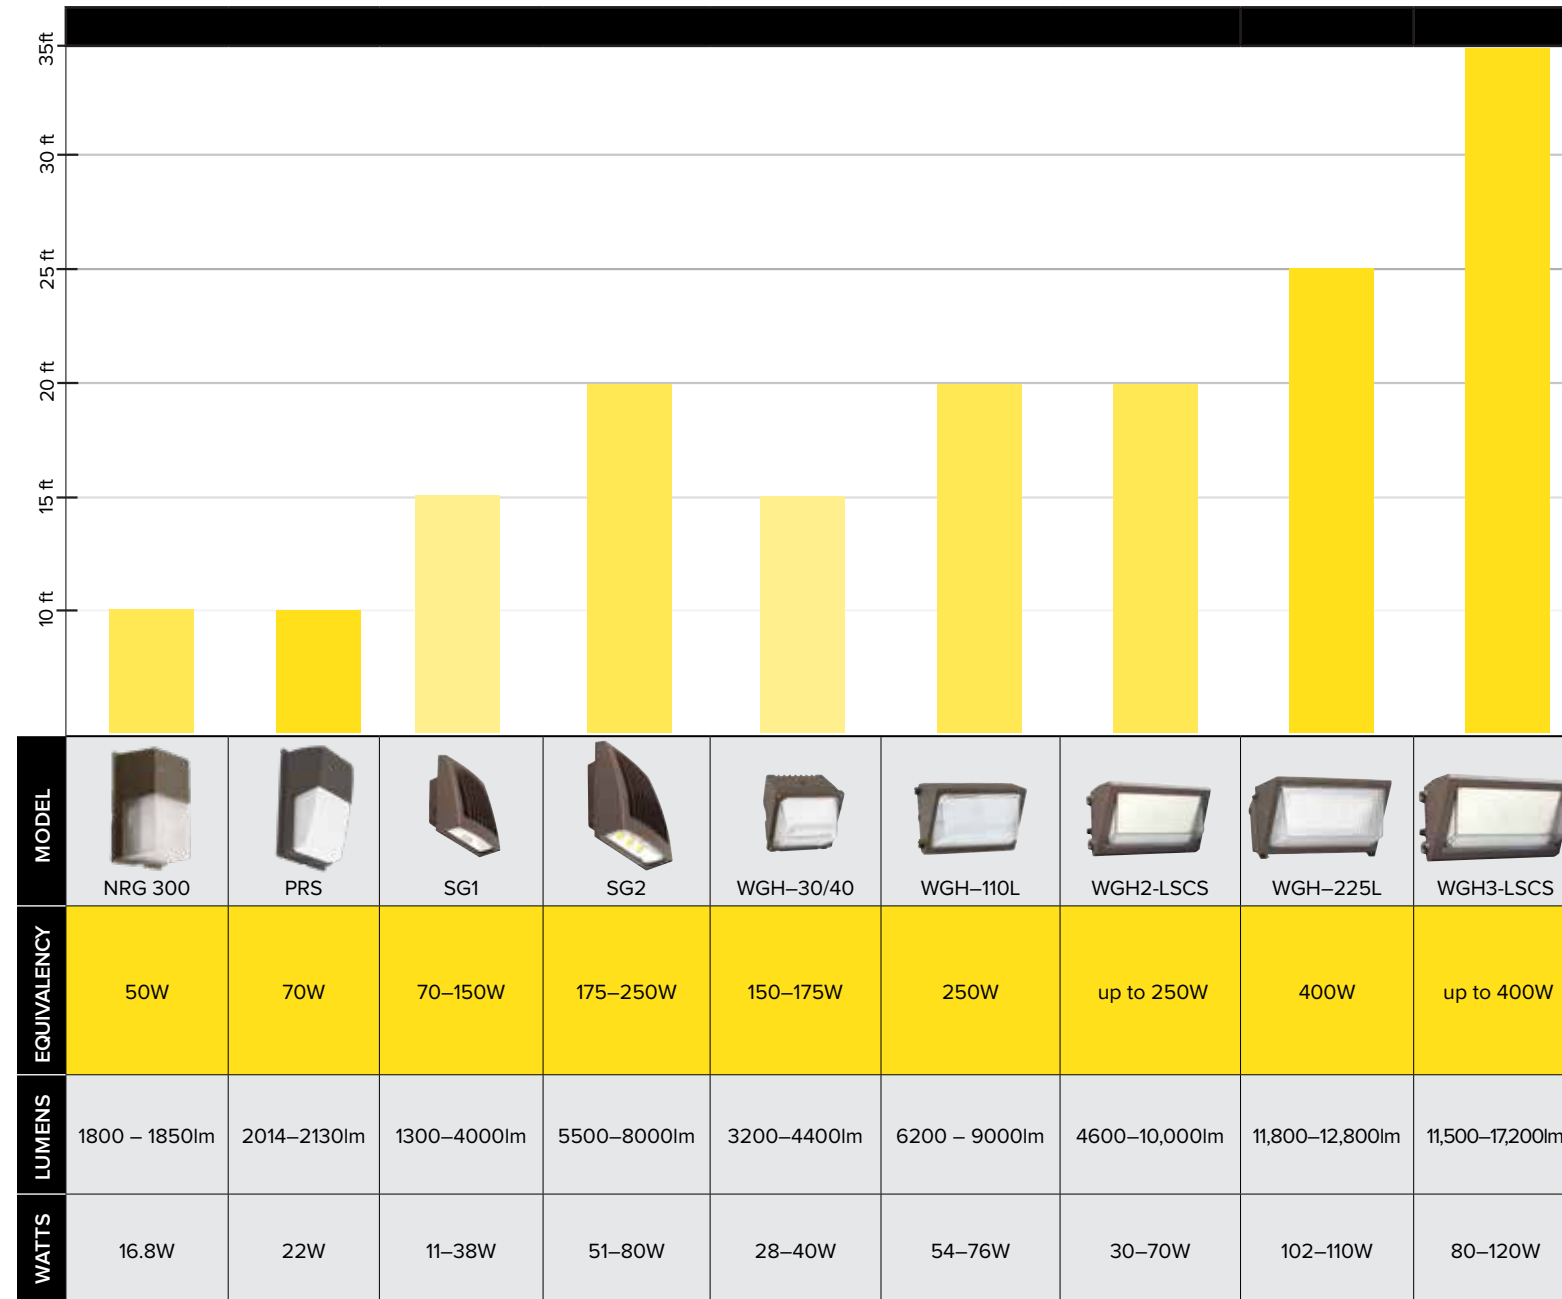


MODEL	NRG 300	PRS	SG1	SG2	WGH-30/40	WGH-110L	WGH2-LSCS	WGH-225L	WGH3-LSCS
EQUIVALENCY	50W	70W	70-150W	175-250W	150-175W	250W	up to 250W	400W	up to 400W
LUMENS	1800 - 1850lm	2014-2130lm	1300-4000lm	5500-8000lm	3200-4400lm	6200 - 9000lm	4600-10,000lm	11,800-12,800lm	11,500-17,200lm
WATTS	16.8W	22W	11-38W	51-80W	28-40W	54-76W	30-70W	102-110W	80-120W

Not all configurations and outputs shown, please visit website for the most up-to-date information. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

SLING

PERIMETER WALLPACK/ FLOODLIGHT

This slender wallpack is available in two sizes for a variety of applications. Its low profile form and wide range of outputs heights provide a scalable solution for mounting heights from eight to twenty feet. SLING luminaires feature a tempered glass lens, IP65 rating and floodlight mounting accessories.

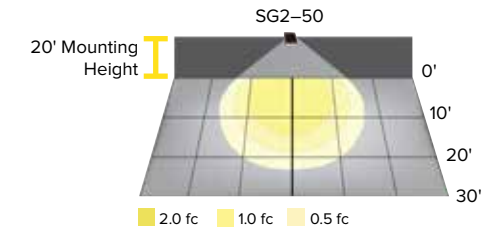

Fixture	Length	Width	Height	Weight
SG1	7.4in.	4.2in.	7.8in.	4.4lbs.
SG2	9.0in.	9.5in.	11.1in.	11.0lbs.


- 5-YEAR WARRANTY
- 4000K, 5000K
- 11-80W
- 70CRI

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency	DLC Listing
						CA	GA	IL	NJ			
SLING Small												
SG1104KPCU	SG1-10-4K-PCU	785988044726	1424	11W	4000K	192	70W	P56L9PT8
SG1204KPCU	SG1-20-4K-PCU	785988033201	2310	21W	4000K	192	100W	PJXKHKE3
SG1304KPCU	SG1-30-4K-PCU	785988033225	3060	29W	4000K	192	150W	PH9F4HZ2
SG1404KPCU	SG1-40-4K-PCU	785988044740	4070	38W	4000K	192	175W	P56L9PT8
SG110PCU	SG1-10-PCU	785988044719	1349	11W	5000K	192	70W	P1RK1H5S
SG120PCU	SG1-20-PCU	785988033195	2263	21W	5000K	192	100W	PTSF2YY
SG130PCU	SG1-30-PCU	785988033157	3270	29W	5000K	192	150W	PUCXBQEM
SG140PCU	SG1-40-PCU	785988044733	4008	38W	5000K	192	175W	P1RK1H5S
SLING Large												
SG2504KPCU	SG2-50-4K-PCU	785988033232	5526	51W	4000K	192	200W	PZTF3TT9
SG2804KPCU	SG2-80-4K-PCU	785988033232	8079	80W	4000K	192	250W	P25GRESH
SG250PCU	SG2-50-PCU	785988033171	5548	51W	5000K	192	200W	PK8TJMHT
SG280PCU	SG2-80-PCU	785988033188	8061	80W	5000K	192	250W	PXEQCQB8
Accessories												
SG1-KNUCKLE	SG1-KNUCKLE	785988033270	-	-	-	-	-	-
SG1-YOKE	SG1-YOKE	785988033249	-	-	-	-	-	-
SG2-KNUCKLE	SG2-KNUCKLE	785988038909	-	-	-	-	-	-
SG2-YOKE	SG2-YOKE	785988038893	-	-	-	-	-	-

WGH2/3

SWITCHABLE GLASS REFRACTOR WALLPACK

Featuring switchable lumen and wattage technology. Borosilicate glass refractor softens LED and provides uniform distribution. Field switchable lumens and LED color temperature (4000K, 4500K, & 5000K); wall mount at heights from 15-25ft.

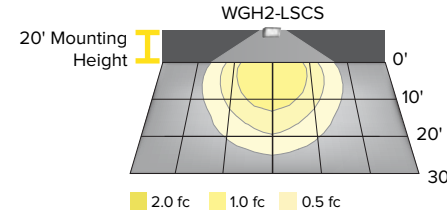

Fixture	Length	Width	Height	Weight
WGH2-LSCS	11.4in.	9.3in.	7.4in.	10.8lbs.
WGH3-LSCS	17.9in.	9in.	9.4in.	13.89lbs.


- 5 yr WARRANTY
- 4000K, 5000K
- 29-100W
- 80CRI
- SWITCHABLE WATTAGE & CCT

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency	DLC Listing
						CA	GA	IL	NJ			
WGH Medium												
93131680	WGH2-LSCS	84014147950	4600-10,000	30-70W	4K, 4.5K, 5K	48	up to 250W	-
WGH Large												
93131681	WGH3-LSCS	84014147967	11,500-17,200	80-120W	4K, 4.5K, 5K	32	up to 400W	-

WGH

GLASS REFRACTOR WALLPACK

Provides energy-efficient, one-for-one replacement of existing legacy technology. Mid-power LEDs offer lower glare, better uniformity, higher efficacies (up to 119 LPW) and lower thermals for longer lasting electronic components. Borosilicate glass refractor softens LED and provides uniform distribution.

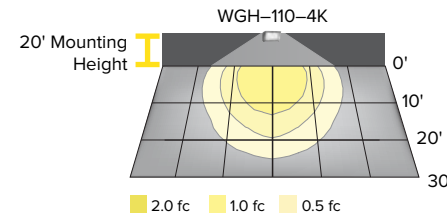

Fixture	Length	Width	Height	Weight
WGH-30/40	10.6in.	6.6in.	7.5in.	6.7lbs.
WGH-110L/133L	7.2in.	13in.	9.0in.	11.0lbs.
WGH-225L	13in.	17in.	9.0in.	19.0lbs.


- 5 yr WARRANTY
- 4000K, 5000K
- 29-100W
- 80CRI

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency	DLC Listing
						CA	GA	IL	NJ			
WGH Small												
WGH304KUS	WGH-30-4K-U-S	785988044559	3259	28W	4000K	168	100W	PL0BH65AUE35
WGH305KUS	WGH-30-5K-U-S	785988044566	3326	28W	5000K	168	100W	PL46QSCHSPWE
WGH404KUS	WGH-40-4K-U-S	785988044573	4394	40W	4000K	168	150W	PLD29AELKVZ2
WGH405KUS	WGH-40-5K-U-S	785988044580	4484	40W	5000K	168	150W	PL947BAW5U9R
WGH Medium												
WGH110L4KUM	WGH-110L-4K-U-M	785988031139	6170	54W	4000K	48	175W	P2PWA7AJV
WGH110L5KUM	WGH-110L-5K-U-M	785988032990	6372	54W	5000K	48	175W	P43MX2XF
WGH133L4KUM	WGH-133L-4K-U-M	785988044597	8989	76W	4000K	108	250W	PLIZBWT2ITZR
WGH133L5KUM	WGH-133L-5K-U-M	785988044603	9173	76W	5000K	108	250W	PLFFO2EG8U2I
WGH Large												
WGH225L4KCL	WGH-225L-4K-C-L	78598831559	11,838	102W	4000K	32	400W	-
WGH225L4KUL	WGH-225L-4K-U-L	785988031146	11,838	102W	4000K	32	400W	PY86CS34D
WGH225L5KUL	WGH-225L-5K-U-L	785988033003	12,138	110W	5000K	32	400W	P6EP7CQZ

PRS

PERIMASHIELD WALLPACK

Compact stylish wallpack constructed of die-cast aluminum. Features impact resistant UV stabilized polycarbonate refractor. Mounts to standard 3-3-1/2" junction boxes with 1/2" conduit entry for surface mount applications. Optional photocontrol available for dusk to dawn operations.

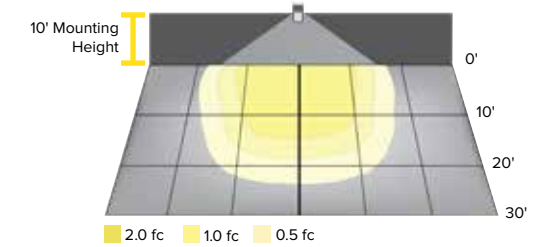

Length	Width	Height	Weight
10.9 in.	6.8 in.	4.8 in.	2.75 lbs.


- 5 yr WARRANTY
- 4000K, 5000K
- 22W
- 70CRI

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency	DLC Listing
						CA	GA	IL	NJ			
93111053	PRS-20-4K-PC	840141419848	2130	22W	4000K	168	150W	P068RVSO
93111054	PRS-20-5K-PC	840141419855	2104	22W	5000K	168	150W	PWPEZ6XU
93115478	PRS-20-4K	840141419862	2130	22W	4000K	168	150W	P068RVSO
93115479	PRS-20-5K	840141419879	2104	22W	5000K	168	150W	PWPEZ6XU

NRG® 300L

POLYCARBONATE WALLPACK

Energy-efficient LED, features a one-piece polycarbonate front, vandal proof construction, dark bronze architectural finish. Photocontrol is available. Entry or single story perimeter lighting for safety, security and identity. Ideal for commercial buildings, shopping centers, schools, apartment complexes as well as non-supervised vandal prone applications.

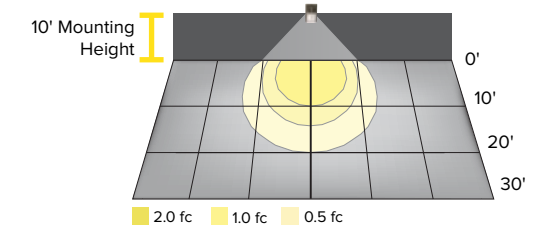




Length	Width	Height	Weight
5.4in.	6.9in.	11.2in.	6.0lbs.

- 5 yr WARRANTY
- 4000K, 5000K
- 16W
- 80CRI

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency	DLC Listing
						CA	GA	IL	NJ			
93092004	NRG-356L-4K-U	785988031399	1858	16W	4000K	144	70W	PS9D61BU
93092005	NRG-356L-4K-U-PC	785988031405	1858	16W	4000K	144	70W	PS9D61BU
93092006	NRG-356L-5K-U	785988031412	1794	16W	5000K	144	70W	PXT41W62
93092007	NRG-356L-5K-U-PC	785988031429	1794	16W	5000K	144	70W	PXT41W62

WALL PACKS

PRODUCT SELECTION GUIDE

		GOOD			BETTER		
		tradeSELECT®			tradeSELECT®		
							
		NRG® 300L			PRS PERIMASHIELD		
					WGH		
FEATURES	Easy to Install	Yes			Yes		
	Mounting Options	Junction box			Junction Box		
	Features	+			+		
	Maintenance	Low			Low		
PERFORMANCE	Lumens	1800			2104–2130		
	Watts	17W			22W		
	Efficacy (maximum LPW)	110			106		
	Distribution	Type IV			Type IV		
	CCT	4000K, 5000K			4000K, 5000K		
	CRI	70			70		
	Certifications	Listed for Wet Locations	UL1598	IP65	Listed for Wet Locations	UL1598	IP65
Yes		Yes	–	Yes	Yes	–	
CONTROLS	Product Life	60,000hrs.			60,000hrs.		
	HID Equivalence	70W			150W		
	Energy Savings (Based on HID Equivalence)	75%			77%		
	Voltage	120–277V			120–277V		
	Basic occupancy	Yes			Yes		
	Occupancy and Daylight Harvesting	–			–		
	Integrated Controls	–			–		

		BETTER						BEST		
		tradeSELECT®			tradeSELECT®			Additional Wallpaper		
										
		WGH2/WGH3			SLING WALL			GEOPAK FAMILY		
					LNC FAMILY			LNC FAMILY		
FEATURES	Easy to Install	Yes			Yes			Yes		
	Mounting Options	Junction box			Side door, Junction box			Mounting Plate, Junction box		
	Features	++++			+++			+++		
	Maintenance	Low			Low			Low		
PERFORMANCE	Lumens	4600–17,200			2200–8100			1000–14,800		
	Watts	30–120W			21–80W			35–170W		
	Efficacy (maximum LPW)	XXX-147			110–115			95–115		
	Distribution	Type IV			Type IV			Type II, Type III, Type IV		
	CCT	4000K, 4500, 5000K			3000K, 4000K, 5000K			3000K, 4000K, 5000K		
	CRI	70			70			70		
	Certifications	Listed for Wet Locations	UL1598	IP65	UL1598	IP65	IP65	Listed for Wet Locations	UL1598	IP65
Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
CONTROLS	Product Life	60,000hrs.			60,000hrs.			60,000hrs.		
	HID Equivalence	150–400W			100–250W			70–400W		
	Energy Savings (Based on HID Equivalence)	75–80%			70–80%			75–80%		
	Voltage	120–277V			120–277V			120–277V		
	Basic occupancy	Yes			Yes			Yes		
	Occupancy and Daylight Harvesting	–			Yes			Yes		
	Integrated Controls	–			SiteSync™			SiteSync™, NX Distributed Intelligence™		

SLING SGD

DUSK TO DAWN SECURITY LUMINAIRE

This stylish dusk-to-dawn area luminaire can be pole mounted or wall mounted and comes standard with a drop-down lens and integral twist-lock photocell.




Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency	DLC Listing
						CA	GA	IL	NJ			
93116179	SGD-40-4K-GR	840141419695	5000	40W	4000K	50	150W	PNWUPH67
93116182	SGD-40-4K	840141419718	5000	40W	4000K	50	150W	PNWUPH67
93116180	SGD-60-4K-GR	840141419701	8000	60W	4000K	50	250W	P72X46Z8
93116183	SGD-60-4K	840141419725	8000	60W	4000K	50	250W	P72X46Z8

PATROLMAN

MULTI-PURPOSE SECURITY LUMINAIRE

Rugged die-cast aluminum housing with both 2-3/8" & 1-5/8" OD mast arm mount capability as well as direct wall, surface mounting. Less refractor provides zero uplight design for environmentally friendly installations.

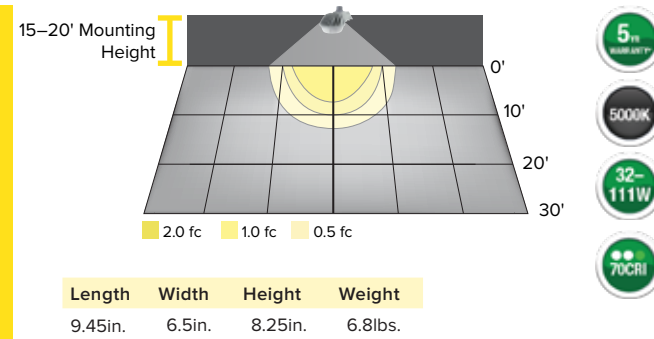

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency	DLC Listing
						CA	GA	IL	NJ			
DDL9L1	DDL-9L1	785988030699	4230	39W	5000K	40	175W	PC9A87FGV
DDL9LU	DDL-9LU	785988032945	4230	39W	5000K	40	175W	PC9A87FGV
DDL56L4K1NA	DDL-56L-4K-1-NA	785988041008	3748	43W	5000K	40	200W	PC9A87FGV
DDL140L1	DDL-140L1	785988031122	6097	30W	5000K	40	250W	PC9A87FGV
Accessories												
ARMDD24	ARM-DD24	785988033287	-	-	-	192	-	-
ARMDD30	ARM-DD30	785988033294	-	-	-	192	-	-

DUSK TO DAWN


PRODUCT SELECTION GUIDE

		BETTER			BEST		
		 PATROLMAN			 SLING SGD		
FEATURES	Easy to Install	Yes			Yes		
	Mounting Options	2 3/8"-1 5/8", Pipe & Wall Mount			2 3/8"-1 5/8", Pipe & Wall Mount		
	Features	++			++		
	Maintenance	Low, Aiming			Low, Aiming		
PERFORMANCE	Lumens	4320			5700-8000		
	Watts	39W			40, 60W		
	Efficacy (maximum LPW)	108			142-143		
	Distribution	Symmetric Type V			Type V		
	CCT	5000K			4000K		
	CRI	70			70		
	Certifications	Listed for Wet Locations	UL1598	IP65	Listed for Wet Locations	UL1598	IP65
		Yes	Yes	Yes	Yes	Yes	Yes
	Product Life	60,000hrs.			60,000hrs.		
	HID Equivalence	150W			100-250W		
Energy Savings (Based on HID Equivalence)	78%			78%			
Voltage	120-277V			120-277V			
CONTROLS	Basic occupancy	Yes			Yes		
	Occupancy and Daylight Harvesting	Yes			Yes		

SLING CANOPY

CANOPY

The low-profile SLING canopy luminaire provides a perfect retrofit solution for existing HID canopy luminaires up to 250W. The impact resistant polycarbonate lens increases durability while also reducing unwanted glare. Versatile surface or pendant mount.

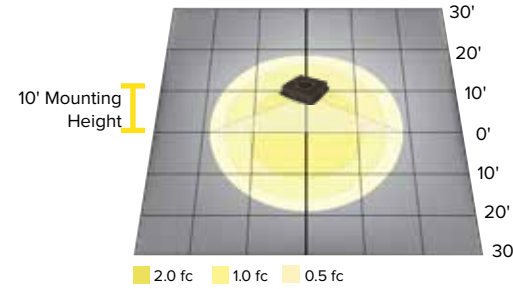




- 5 yr WARRANTY
- 4000K
- 25-60W
- 70CRI

Length	Width	Height	Weight
10.2in.	3.6in.	6.4in.	4.9lbs.

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency	DLC Listing
						CA	GA	IL	NJ			
93116283	SGC-20-4K	840141419732	3000	25W	4000K	168	100W	PJFVWDXW
93116284	SGC-40-4K	840141419749	5000	40W	4000K	168	150W	P3Z8QRNP
93116286	SGC-40-4K-WH	840141419763	5500	40W	4000K	168	150W	P3Z8QRNP
93116285	SGC-60-4K	840141419756	8000	60W	4000K	168	250W	P72X46Z8

CANOPY


PRODUCT SELECTION GUIDE

		GOOD	BETTER	BEST	
		 SLING CANOPY	 LUMASQUARE	 BEACON DRIVE	
FEATURES	Easy to Install	Yes	Yes	Yes	
	Mounting Options	Standard J-Box-3/4" Pendant, 3 sided 1/2" 14 NPS threaded conduit entry	Standard J-Box or 3/4" Pendant	Standard J-Box or 3/4" Pendant	
	Features	++	++	+++	
	Maintenance	Low	Low	Low	
PERFORMANCE	Lumens	3000-8000	3000-9000	2,500-16,000	
	Watts	25-60W	25-75W	20-55W	
	Efficacy (maximum LPW)	120-133	120-127	109-125	
	Distribution	Type V	Type V	Type V, Type VC, Type VRW, Type IV	
	CCT	4000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	
	CRI	70	70	70	
	Certifications	Listed for Wet Locations	UL1598 IP65	Listed for Wet Locations UL1598 IP65	Listed for Wet Locations UL1598 IP65
		Yes	Yes Yes	Yes Yes Yes	Yes Yes Yes
	Product Life	60,000hrs.	60,000hrs.	60,000hrs.	
	HID Equivalence	100W	175-250W	175-250W	
Energy Savings	75%	75%	78%		
Voltage	120-277V	120-277V	120-277V		
CONTROLS	Basic occupancy	Yes, with optional PC	Yes	Yes	
	Occupancy and Daylight Harvesting	-	Yes	Yes	
	Integrated Controls	-	SiteSync™ Site	NX Distributed Intelligence™	

VAPORTITES

CEILING/WALL VAPORTITES

Rugged die-cast aluminum construction, frosted globe with guard, wet location listed, energy-efficient LED vaportites for ceiling, pendant, wall mount. Use for entry, corridors, tunnels, service passages, stairwells. Gray powder paint finish.

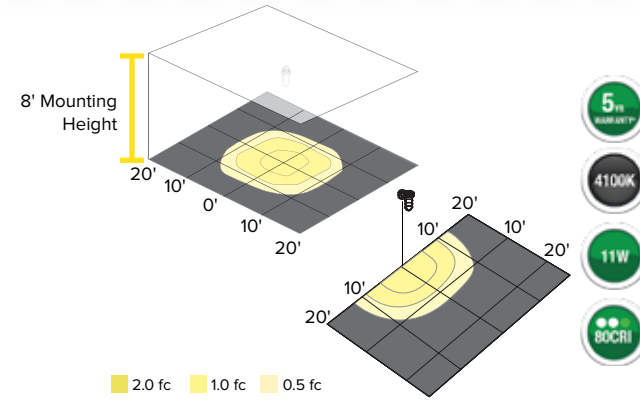

- 5 YEAR WARRANTY
- 4100K
- 11W
- 80CRI

Colored Globe Accessories



Fixture	Length	Width	Height	Weight
VGBL-1	-	5.2in.	10.37in.	3.5lbs.
VWGL-1	7.34in.	5.2in.	11.0in.	3.6lbs.
Accessories				
VGL-FG	-	3.8in.	8.2in.	1.0lbs.
Colored Globes	-	3.8in.	8.2in.	1.0lbs.
VGL-GUARD	-	4.2in.	8.3in.	0.5lbs.

Part #	Catalog #	UPC	Lumens	Watts	CCT	Stock Location				Pallet Qty	Equivalency
						CA	GA	IL	NJ		
93092008	VGBL-1	785988030651	757	11W	4100K	•	•	•	-	-	70W
93092009	VWGL-1	785988030668	757	11W	4100K	•	•	•	-	-	70W
Accessories											
VGL-FG	VGL-FG	78598841282	-	-	-	•	•	-	-	-	-
VGL-GUARD	VGL-GUARD	-	-	-	-	•	-	-	-	-	-
Colored Globes											
VGL-GN	VGL-GN	78598841299	-	-	-	•	-	-	-	-	-
VGL-YW	VGL-YW	78598841312	-	-	-	•	-	-	-	-	-
VGL-BU	VGL-BU	78598841275	-	-	-	•	-	-	-	-	-
VGL-RD	VGL-RD	78598841305	-	-	-	•	-	-	-	-	-

VAPORTITES

PRODUCT SELECTION GUIDE

GOOD

		tradeSELECT® VGBL	tradeSELECT® VWGL	
FEATURES	Easy to Install	Yes	Yes	
	Mounting Options	Standard J-Box-Ceiling-4 sided 1/2" 14 NPS threaded conduit entry	Standard J-Box-4 sided 1/2" 14 NPS threaded conduit entry	
	Features	++	++	
	Maintenance	Low	Low	
PERFORMANCE	Lumens	757	757	
	Wattage	11W	11W	
	Efficacy (maximum LPW)	70	70	
	CCT	4100K	4100K	
	CRI	80	80	
	Certifications	Listed for Wet Locations	UL1598 IP65	Listed for Wet Locations UL1598 IP65
			Yes Yes Yes	Yes Yes Yes
	Product Life	60,000hrs.	60,000hrs.	
	HID Equivalence	100w	100w	
	Energy Savings (Based on HID Equivalence)	82%	82%	
Voltage	120-277V	120-277V		