


DUAL-RATED ALUMINUM GROUND CLAMPS

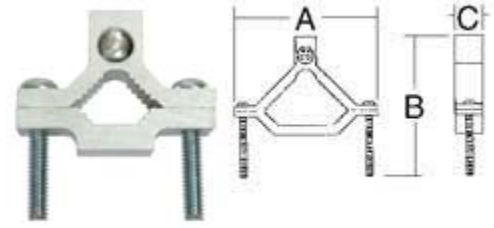

E-76964

Buy Retail Online @ Galvan Direct

- For connecting ground conductor to steel or copper pipe or tubing.
- Tin plated for corrosion resistance.
- Dual-rated for copper or aluminum conductor.

CATALOG NUMBER	PIPE SIZE	CONDUCTOR RANGE	PCS. PER CTN.	WT. PER 100	DIMENSIONS			NAED UPC NO. 632591-
					A	B	C	
GC1	1/2" - 1"	1/0-14	25	19	2.25	2.5	0.63	61132-9
GC21	1-1/4" - 2"	250-6	10	24	3.75	3.87	0.87	61133-6
GC41	2-1/2" - 4"	250-6	10	49	6.31	5.62	0.87	61134-3

DIRECT BURIAL GROUND CLAMP



Buy Retail Online @ Galvan Direct

- Constructed from bronze alloy and stainless-steel screws for direct burial in earth and concrete.
- Lay-In feature simplifies routing of conductor during installation.
- Combines several pipe-type clamps into a single inventory item.
- UL Listed for “direct burial” in earth and concrete.
- Represents a cost-reduction for distributor and end-user alike.
- Ideal for pool & spa bonding.

JRD	SIZE	CONDUCTOR RANGE	SUB & MASTERPACK	WT. PER 100	NAED UPC NO.632591-
Rebar Size	3/8" - 1"	10 Sol.-2 Str.	25/100	25	61470-2
Pipe Size	1/2" - 1"	10 Sol.-2 Str.	25/100	25	61470-2
Rod Size	1/2" - 1"	10 Sol.-2 Str.	25/100	25	61470-2

- One universal clamp for pipe, rebar, and ground rod.



Buy Retail Online @ Galvan Direct

JRD - 4/0	SIZE	CONDUCTOR RANGE	SUB & MASTERPACK	WT. PER 100	NAED UPC NO.632591-

JRD - 4/0	SIZE	CONDUCTOR RANGE	SUB & MASTERPACK	WT. PER 100	NAED UPC NO.632591-
Rebar Size	3/8" - 1"	#8 Str. - 4/0 Str.	25/100	56	61327-9
Pipe Size	1/2" - 1"	#8 Str. - 4/0 Str.	25/100	56	61327-9
Rod Size	1/2" - 3/4"	#8 Str. - 4/0 Str.	25/100	56	61327-9

BOLTED WATER PIPE GROUND CLAMPS



Buy Retail Online @ Galvan Direct

- All clamps except DCG are manufactured from high-strength corrosion-resistant copper alloy.

CATALOG NUMBER	PIPE SIZE	CONDUCTOR RANGE	SUB & MASTERPACK	WT. PER 100	NAED UPC NO.632591-
Copper Alloy, UL Listed					
GC	1/2" - 1"	10 Sol.-2 Str.	25/100	21	70739-8
GC2	1-1/4" - 2"	10 Sol.-2 Str.	50	42	70741-1
G2124	2-1/2" - 4"	10 Sol.-4 Str.	20	105	61266-1
G4146	4-1/4" - 6"	10 Sol.-4 Str.	10	194	61226-5

CATALOG NUMBER	PIPE SIZE	CONDUCTOR RANGE	SUB & MASTERPACK	WT. PER 100	NAED UPC NO.632591-
Copper Alloy, Non UL Listed					

CATALOG NUMBER	PIPE SIZE	CONDUCTOR RANGE	SUB & MASTERPACK	WT. PER 100	NAED UPC NO.632591-
GCJ	1/2" - 1"	10 Sol.-2 Str.	25/100	16	70740-4

CATALOG NUMBER	PIPE SIZE	CONDUCTOR RANGE	SUB & MASTERPACK	WT. PER 100	NAED UPC NO.632591-
UL LISTED, DIRECT BURIAL WITH BRONZE OR STAINLESS STEEL SCREWS					
JD	1/2" - 1"	10 Sol. - 2 Str.	25/200	21	70758-9
JD2	1-1/4" - 2"	10 Sol.-2 Str.	50	48	61301-9

CATALOG NUMBER	PIPE SIZE	CONDUCTOR RANGE	SUB & MASTERPACK	WT. PER 100	NAED UPC NO.632591-
Zinc Die Cast Pipe Clamp					
DCG	1/2" - 1"	8 Sol.-2 Str.	25/200	15	70744-2

GROUND CLAMPS FOR RIGID CONDUIT WITH COPPER STRAP



Buy Retail Online @ Galvan Direct

- Used to connect grounding conductor in rigid conduit to water pipe for grounding.
- Copper strap allows flexibility during grounding and helps protect conduit system from the effects of vibrations in water system.
- Available with 360° swing hub (GLH).
- Cast from high strength, highly conductive copper alloy.

CATALOG NUMBER	PIPE SIZE	PCS. PER CTN.	WT. PER 100	CONDUIT SIZE	TECHNICAL DATA		NAED UPC NO. 632591-
					Min. Wire Size	Max. Wire Size	
GC-11CSLH-1	1/2" - 1"	35	54	1/2"	10 sol.	6 str.	61228-9
GC-11CSLH-2	1/2" - 1"	30	58	3/4"	10 sol.	2/0 str.	61230-2
GC-11CSLH-3	1/2" - 1"	30	68	1"	10 sol.	3/0 str.	61232-6

CONDUIT HUBS

- Used with ground pipe clamp to connect rigid conduit to water pipe for grounding.
- 360° swing type hub provides flexibility in connection.
- Cast from high strength, highly conductive copper alloy.



Regular Type

CATALOG NUMBER	CONDUIT SIZE	PCS. PER CTN.	WT. PER 100	TECHNICAL DATA		NAED UPC NO. 632591-
				Min. Wire Size	Max. Wire Size	
GH-1	1/2"	150	11	8 sol.	4 str.	61260-9
GH-2	3/4"	75	20	8 sol.	4 str.	61261-6
GH-3	1"	50	25	8 sol.	4 str.	61262-3

360° Swing Hub

CATALOG NUMBER	CONDUIT SIZE	PCS. PER CTN.	WT. PER 100	TECHNICAL DATA		NAED UPC NO. 632591-
				Min. Wire Size	Max. Wire Size	
GLH-1	1/2"	50	20	10 sol.	6 str.	61263-0
GLH-2	3/4"	50	29	10 sol.	2/0 str.	61264-7
GLH-3	1"	25	31	10 sol.	3/0 str.	61265-4

GROUND CLAMPS FOR RIGID CONDUIT



- Used to connect grounding conductor in rigid conduit to water pipe for grounding.
- Available with zinc plated screws.
- Cast from high strength, highly conductive copper alloy.

WITH STEEL SSCREWS							
Catalog Number	Pipe Size	Pcs. per Ctn.	Wt. per 100	Conduit Size	Technical Data		NAED UPCNo. 632591-
					Min. Wire Size	Max. Wire Size	
GC-61	1/2" - 1"	25	34	1/2"	8 Sol.	4 str.	61239-5
GC-62	1/2" - 1"	25	40	3/4"	8 Sol.	4 str.	61240-1
GC-63	1/2" - 1"	25	47	1"	8 Sol.	4 str.	61241-8
GC-66	1-1/4" - 2"	25	52	1/2"	8 Sol.	4 str.	61242-5
GC-67	1-1/4" - 2"	25	59	3/4"	8 Sol.	4 str.	61243-2
GC-68	1-1/4" - 2"	25	63	1"	8 Sol.	4 str.	61244-9

All clamps except DCG are manufactured from high-strength corrosion-resistant

GROUND CLAMPS FOR RIGID CONDUIT WITH SWIVEL HUB

- Used to connect grounding conductor in rigid conduit to water pipe for grounding.
- Hub swings 360° for easy alignment.
- Assembled with zinc plated steel screws.
- Cast from high strength, highly conductive copper alloy.



CATALOG NUMBER	PIPE SIZE	PCS. PER CTN.	WT. PER 100	CONDUIT SIZE	TECHNICAL DATA		NAEDO UPC NO. 632591-
					Min. Wire Size	Max. Wire Size	
GC-11LH-1	1/2" - 1"	25	41	1/2"	10 sol.	6 str.	61245-6
GC-11LH-2	1/2" - 1"	25	50	3/4"	10 sol.	2/0 str.	61246-3
GC-11LH-3	1/2" - 1"	25	55	1"	10 sol.	3/0 str.	61247-0
GC-22LH-1	1-1/4" - 2"	25	66	1/2"	10 sol.	6 str.	61248-7
GC-22LH-2	1-1/4" - 2"	25	69	3/4"	10 sol.	2/0 str.	61249-4
GC-22LH-3	1-1/4" - 2"	25	76	1"	10 sol.	3/0 str.	61250-0
GC-4LH-1	2-1/2" - 4"	10	124	1/2"	10 sol.	6 str.	61251-7
GC-4LH-2	2-1/2" - 4"	10	131	3/4"	10 sol.	2/0 str.	61252-4
GC-4LH-3	2-1/2" - 4"	10	133	1"	10 sol.	3/0 str.	61253-1

GROUND CLAMPS FOR ARMORED CABLE



- Used to connect armored cable to water pipe for grounding.
- Special pressure bar grips armored cable insulation to decrease chances of grounding conductor being pulled out.
- Available with steel or bronze screws.
- Cast from high strength, highly conductive copper alloy.

WITH STEEL SCREWS FOR DIRECT BURIAL						
Catalog Number	Pipe Size	Pcs. per Ctn.	Wt. per 100	Technical Data		NAED UPCNo. 632591-
				Min. Wire Size	Max. Wire Size	
GC-6	1/2" - 1"	25/250	27	8 sol.	4 str.	61233-3
GC7	1-1/4" - 2"	25	48	8 sol.	4 str.	61235-7
GC-71 \times	2-1/2" - 4"	10	146	8 sol.	4 str.	61236-4
GC-72 \times	4-1/2" - 6"	10	192	8 sol.	4 str.	61237-1

WITH BRONZE SCREWS FOR DIRECT BURIAL						
Catalog Number	Pipe Size	Pcs. per Ctn.	Wt. per 100	Technical Data		NAED UPCNo. 632591-
				Min Wire Size	Max Wire Size	
GC-6D	1/2" - 1"	25/250	28	8 Sol.	4 str.	61238-8

• \times -UL Listed

GROUND CLAMPS FOR ARMORED CABLE 360° SWIVEL TYPE



CATALOG NUMBER	PIPE SIZE	PCS. PER CTN.	WT. PER 100	TECHNICAL DATA		NAED UPC NO. 632591-
				Min. Wire Size	Max. Wire Size	
GC-11JA	1/2" to 1"	25	41	10 sol.	6 str.	61257-9
GC-22JA	1-1/4" to 2"	25	66	10 sol.	6 str.	61258-6
GC-4JA	2-1/2" to 4"	10	122	10 sol.	6 str.	61259-3