


THREADLESS COUPLINGS FOR “COPPER-COATED” RODS – CAST BRONZE


- Refer to ground rod part number for appropriate coupling.
- Made in USA. 



CATALOG NUMBER	GROUND ROD DIAMETER	GROUND ROD DIAMETER (METRIC) APPROXIMATE	PCS. PER CTN.	WT. PER 100 LB (KG)	NAED UPC NO.632591-
50-TC*	1/2"	12.8 mm	25	22 (10.0)	61344-6
60-TC**	5/8"	14.2 mm	25	25 (11.3)	70724-4
70-TC*	3/4"	17.3 mm	10	40 (18.1)	61223-4
GRC-100CP***	1"	25.4 mm	10	90 (40.1)	61498-6

Notes:* UL and CSA Listed/For use with UL and/or CSA Listed copper-coated rods only.
 ** UL and RUS Listed/For use with UL Listed copper-coated rods only.
 *** This item copper-plated steel.

THREADED COUPLINGS FOR “COPPER-COATED” SECTIONAL RODS – CAST BRONZE

- Refer to ground rod part number for appropriate coupling.
- Made in USA. 



CATALOG NUMBER	GROUND ROD DIAMETER	GROUND ROD DIAMETER (METRIC) APPROXIMATE	PCS. PER CTN.	WT. PER 100 LB (KG)	NAED UPC NO.632591-
50-LC*	1/2" (9/16"-12)	12.8 mm	25	17 (7.7)	70735-0
60-C**	5/8" (5/8"-11)	14.2 mm	25	25 (11.3)	70720-6
70-C*	3/4" (3/4" - 10)	17.3 mm	25	40 (18.1)	70721-3
80-C*	1" (1"-8)	25.4 mm	25	100 (45.4)	70722-0


Notes:

* UL and CSA Listed for US and Canada

** UL RUS and CSA Listed

Made from high-strength corrosion-resistant copper alloy, tapped for use on all standard threaded sectional rods.

THREADLESS COUPLINGS FOR “HOT-DIP GALVANIZED” RODS – PLATED STEEL

- Refer to ground rod part number for appropriate coupling.
- Made in USA. 



CATALOG NUMBER	GROUND ROD DIAMETER	GROUND ROD DIAMETER (METRIC) APPROXIMATE	PCS. PER CTN.	WT. PER 100 LB (KG)	NAED UPC NO.632591-
GRC-54G	5/8"	14 mm	100	30 (13.6)	61134-3
GRC-625G	5/8"	15.9 mm	100	30 (13.6)	61132-9
GRC-34G	3/4"	19.1 mm	25	38 (17.2)	61133-6
GRC-100G	1"	25.4 mm	10	90 (40.1)	61492-4


Notes:

GRC-54G use with Galvan part # GR6258 and all 5/8 inch trade size rods (0.539-0.555 inch diameter).

GRC-625G use with all 5/8 inch full size rods (0.625-0.640 inch diameter)

GRC-34G use with all ¾ inch full size rods (0.750-0.769 inch diameter).

THREADLESS COUPLINGS FOR “STAINLESS STEEL” RODS

- Material 303 stainless steel.
- Refer to ground rod part number for appropriate coupling.
- Made in USA. 




CATALOG NUMBER	GROUND ROD DIAMETER	GROUND ROD DIAMETER (METRIC) APPROXIMATE	PCS. PER CTN.	WT. PER 100 LB (KG)	NAED UPC NO.632591-
GRC-58SS	5/8"	14.2 mm	25	30 (13.6)	70683-4
GRC-34SS	3/4"	17.3 mm	25	38 (17.2)	70684-1
GRC-100SS	1"	25.4 mm	25	90 (40.1)	61493-1

Notes:

Listed by CSA for US and Canada

THREADED COUPLINGS FOR "STAINLESS STEEL" RODS

- Refer to ground rod part number for appropriate coupling.
- Material 303 stainless steel.
- Made in USA. 



CATALOG NUMBER	GROUND ROD DIAMETER	GROUND ROD DIAMETER (METRIC) APPROXIMATE	PCS. PER CTN.	WT. PER 100 LB (KG)	NAED UPC NO.632591-
GRC-58SST	5/8" (5/8" - 11)	14.2 mm	25	30 (13.6)	61122-0
GRC-34SST	3/4" (3/4" - 10)	17.3 mm	25	38 (17.2)	61123-7
GRC-100SST	1" (1" - 8)	25.4 mm	25	90 (40.1)	61494-8

Notes:

Listed by CSA for US and Canada

DRIVE STUDS FOR THREADED COUPLINGS FOR USE ON COPPER COATED AND STAINLESS STEEL SECTIONAL RODS

- Material is Grade – 5.
- All threads are UNS -Class 2A.




CATALOG NUMBER	GROUND ROD DIAMETER	GROUND ROD DIAMETER (METRIC) APPROXIMATE	PCS. PER CTN.	WT. PER 100 LB (KG)	NAED UPC NO.632591-
50-LDS	1/2" (9/16"-12)	12.8 mm	10	16 (7.3)	70736-7
60-DS	5/8" (5/8"-11)	14.2 mm	10	23 (10.4)	70728-2
70-DS	3/4" (3/4"-10)	17.3 mm	10	35 (15.9)	70729-9
80-DS	1"(1"-8)	25.4 mm	10	75 (34.0)	70730-5

Notes: Drive studs are produced from high-strength steel and may be used with commercially available threaded couplings. UNC Threads.

GROUND ROD DRIVER



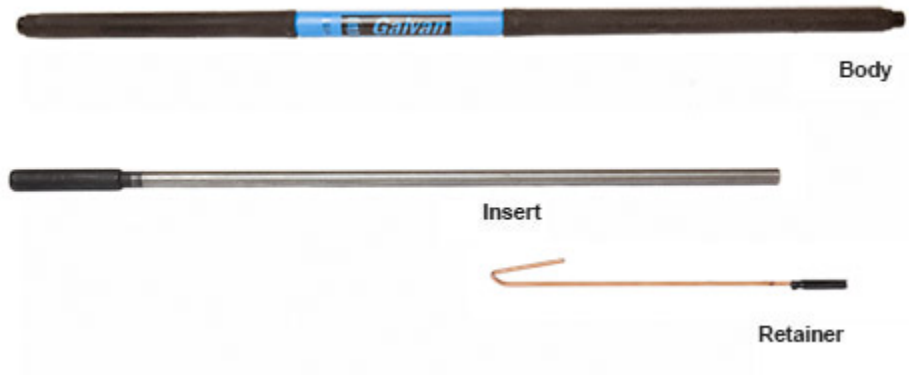

Buy Retail Online @ Galvan Direct

- High-quality materials, design and construction
- For 5/8" or 3/4" copper-coated and galvanized rods
- Drives flush or below grade
- No ladder, no kneeling
- Safer than hammers
- No mushrooming of rods
- Also drives rebar
- BEST OF ALL — cost effective enough to have one on every truck in your fleet!
- Made in USA. 🇺🇸

CATALOG NUMBER	DESCRIPTION	MAXIMUM ROD DIAMETER (IN.)	PCS. PER CTN.	WT.(LBS.)	NAED UPC NO. 632591-
GRD-U	5/8 & 3/4 Body with insert	0.75	1	23	61386-6

CATALOG NUMBER	DESCRIPTION	MAXIMUM ROD DIAMETER (IN.)	PCS. PER CTN.	WT.(LBS.)	NAED UPC NO. 632591-
GRDI-U	Universal Insert replacemen	0.75	1	6	61388-0
CR	Cable retainer replacement	N/A	1	-	61389-7

Note: Inserts are interchangeable with either ground rod driver body.
