

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Our recessed LED module is the most economical means to create a well lit environment with exceptional energy efficiency and near zero maintenance. Great for retrofit into existing downlight cans or new construction and remodel applications. Adjustable torsion spring and retention allows fitment into many 5" and 6" cans. The LED module maintains at least 70% light output for 35,000 hours. Indoor and Outdoor Use.

**CONSTRUCTION** — Aluminum spun reflector with deep baffle configuration for reduced glare. Combined LED and driver printed circuit board attached. Inner reflector cone funnels light through the pressed-in diffused lens.

**OPTICS** — Diffused lens at end of mixing chamber to provide even light distribution for general illumination, equivalent to 65W BR30 lamp.

Wide flood beam angle at >45°.

**ELECTRICAL** — Center 2 Edge™ (patent pending) technology created for a single point source. Primary power disconnect provided for simple connection to a dedicated LED connector in the housing.

Dimming down to 10%. For compatible dimmers, refer to Compatible Dimmers Chart.

835-lumen E series has an input wattage of 11.9 watts, 70 lumens per watt, equivalent to 65-watt incandescent.

E Series' patent pending driver has zero inrush, which allows power loads to be calculated with actual rated wattages.

Example: 50 units of 65BEMW LED fixtures can be installed in line with a 600-watt dimmer. 600W/11.9W = 50 fixtures.

**INSTALLATION** — Suitable for installation in standard and shallow-height rough-in sections.

E26 socket adapter ships standard.

Twin torsion springs ensure easy installation for 5" and 6" recessed housings.

**LISTINGS** — CSA certified to US and Canadian safety standards. ENERGY STAR® certified. Can be used to comply with California Title 24 Part 6 High Efficacy LED Light Source Requirements. Wet location listed. WSEC ASTM E283 for Air-Tight (with IC housings).

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

**PATENTS PENDING.**

Catalog Number
Notes
Type

### LED Recessed Downlighting


# 65BE

5" / 6" LED Module

IC/Non-IC  
Retrofit



E26 adaptor  
(included)

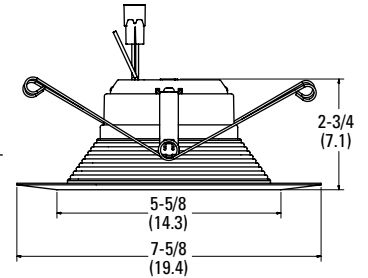

#### Specifications

Aperture: 5-5/8 (14.3)

Ceiling opening: Determined by rough-in

Overlap trim: 7-5/8 (19.4)

Height: 2-3/4 (7.1)

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

For shortest lead times, configure product using **bolded** options.

**Example:** 65BEMW LED 27K 90CRI L7XLED T24

Series/Finish	Lamp	CCT / W / Lumens <sup>1</sup>	CRI	Voltage	Housing options
<b>65BEMW</b> 5" / 6" Baffle LED module, matte white	<b>LED</b>	<b>27K</b> 2700 K / 12.1W / 750L	<b>90CRI</b> 90CRI	(blank) 120V	<b>L7XLED T24</b> 6" new construction rough-in LED base
		<b>30K</b> 3000 K / 11.9W / 835L			<b>L7XRLED T24</b> 6" remodel rough-in LED base
		<b>35K</b> 3500 K / 11.7W / 825L			<b>LC6LED T24</b> 6" new construction rough-in LED base
		<b>40K</b> 4000 K / 11.9W / 845L			<b>L7X</b> 6" new construction rough-in <sup>2</sup>
		<b>50K</b> 5000 K / 12.12W / 825L			<b>L7XR</b> 6" remodel rough-in <sup>2</sup>
	<b>HL LED</b>	<b>27K</b> 2700K/11.7W/1090L	<b>(blank)</b> 80CRI	<b>L7XP</b> 6" new construction shallow rough-in <sup>2</sup>	
		<b>30K</b> 3000K/11.9W/1100L		<b>L7XPR</b> 6" remodel shallow rough-in <sup>2</sup>	
		<b>40K</b> 4000K/11.9W/1110L		<b>LC6</b> 6" new construction rough-in <sup>2</sup>	
				<b>LCP</b> 6" new construction shallow rough-in <sup>2</sup>	
				<b>LSLED T24</b> 5" new construction rough-in LED base	
	<b>LSRLED T24</b> 5" remodel rough-in LED base				
	<b>L5</b> 5" new construction rough-in <sup>2</sup>				
	<b>LSR</b> 5" new construction rough-in <sup>2</sup>				

<b>Accessories:</b> order as separate catalog number	
<b>TSA6</b>	6" torsion spring adaptor


#### Notes

- Total system delivered lumens.
- Must be ordered on a separate line.


PHOTOMETRICS

Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire


65BEMW LED, 27K, input watts: 11.9, delivered lumens: 772, LM/W = 62, test no. ISF 35429P1, tested in accordance with IESNA LM 79-08

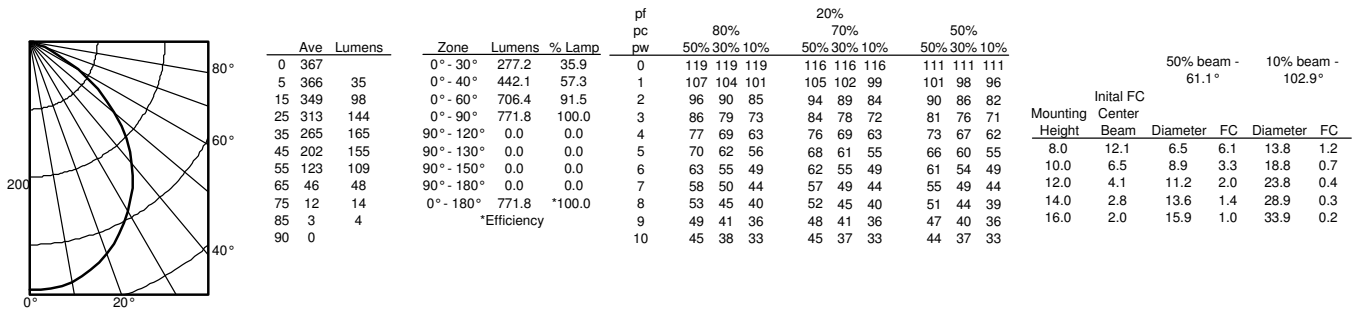


65BEMW LED, 30K, input watts: 11.9, delivered lumens: 859, LM/W = 70, test no. ISF 35429, tested in accordance with IESNA LM 79-08

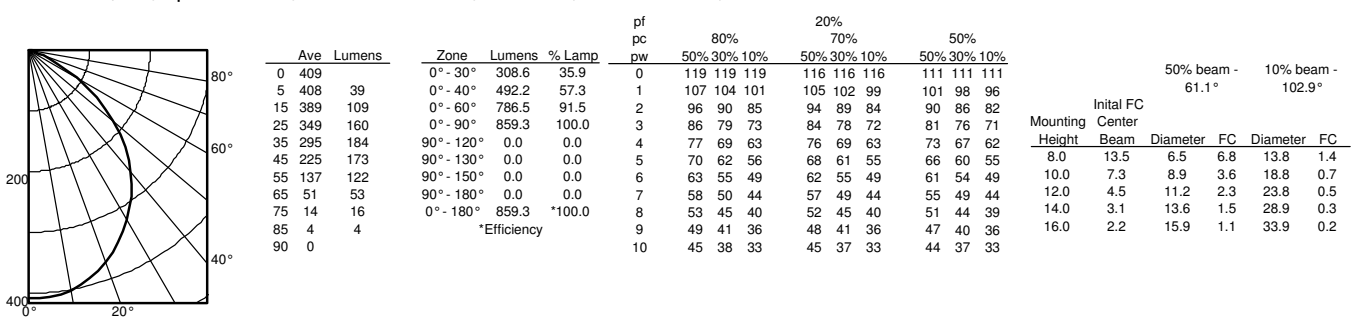

65BEMW LED, 35K, input watts: 11.9, delivered lumens: 849, LM/W = 71, test no. ISF 35429P2, tested in accordance with IESNA LM 79-08

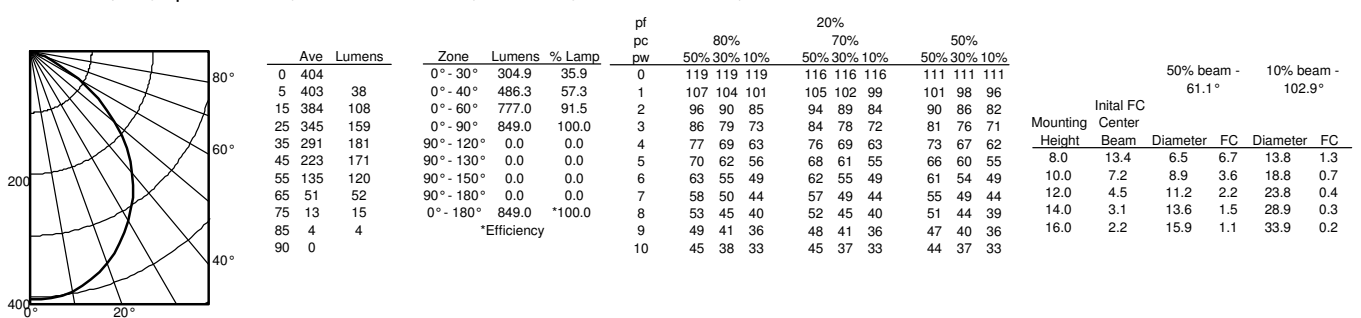


65BEMW LED, 40K, input watts: 11.9, delivered lumens: 870, LM/W = 71, test no. ISF 35429P3, tested in accordance with IESNA LM 79-08

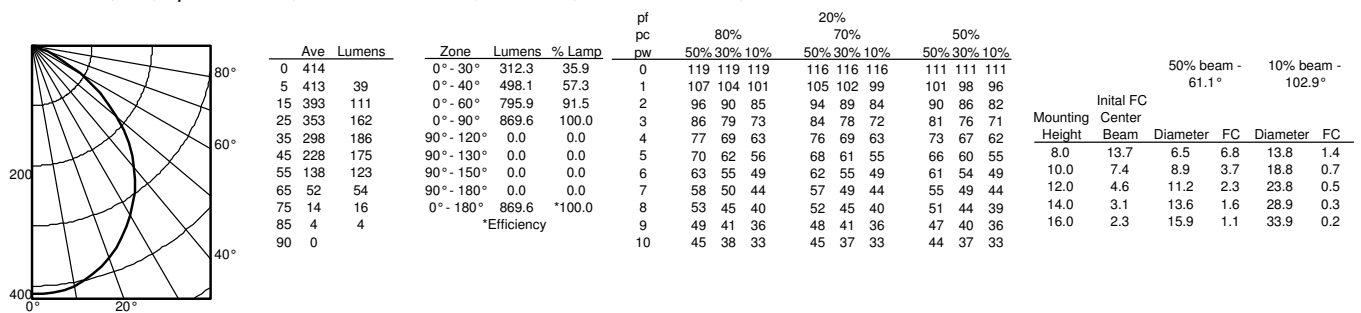

PHOTOMETRICS

Distribution Curve	Distribution Data	Output Data	Coefficient of Utilization	Illuminance Data at 30" Above Floor for a Single Luminaire
--------------------	-------------------	-------------	----------------------------	--

65BEMW LED, 50K, input watts: 11.9, delivered lumens: 849, LM/W = 68, test no. ISF 35429P4, tested in accordance with IESNA LM 79-08

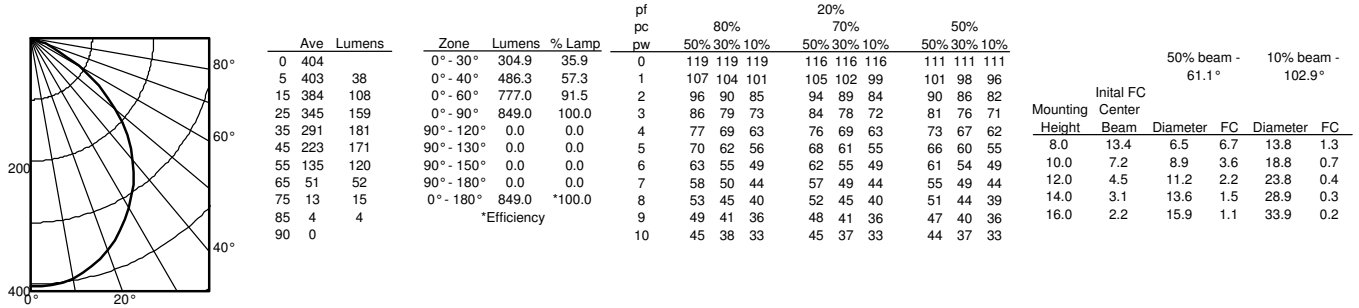

ADDITIONAL DATA 65BEMW LED 27K

6"/5" ENERGY DATA	
Lumens	750
Color Temperature	2700K
CRI	90
Lu/Watts	62
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	12.1W
Input power	12.1W
Input current	0.1A

ADDITIONAL DATA 65BEMW LED 30K

6"/5" ENERGY DATA	
Lumens	835
Color Temperature	3000K
CRI	90
Lu/Watts	70
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	0.1A

ADDITIONAL DATA 65BEMW LED 35K

6"/5" ENERGY DATA	
Lumens	825
Color Temperature	3500K
CRI	90
Lu/Watts	70
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.7W
Input power	11.7W
Input current	0.1A

ADDITIONAL DATA 65BEMW LED 40K

6"/5" ENERGY DATA	
Lumens	845
Color Temperature	4000K
CRI	90
Lu/Watts	71
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	0.1A

ADDITIONAL DATA 65BEMW LED 50K

6"/5" ENERGY DATA	
Lumens	825
Color Temperature	5000K
CRI	90
Lu/Watts	68
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	12.12W
Input power	12.12W
Input current	0.1A

LIGHTING FACTS

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 750  
**Watts** 12.1  
**Lumens per Watt (Efficacy)** 61.98

**Color Accuracy**  
Color Rendering Index (CRI) 90

**Light Color**  
Correlated Color Temperature (CCT) 2700 (Warm White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-SGATDZ (8/15/2017)  
Model Number: 65BEMW LED 27K 90CRI  
Type: Retrofit Kit - Downlight

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 835  
**Watts** 11.9  
**Lumens per Watt (Efficacy)** 70.17

**Color Accuracy**  
Color Rendering Index (CRI) 90

**Light Color**  
Correlated Color Temperature (CCT) 3000 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-DKOYOM (8/15/2017)  
Model Number: 65BEMW LED 30K 90CRI  
Type: Retrofit Kit - Downlight

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 825  
**Watts** 11.7  
**Lumens per Watt (Efficacy)** 70.51

**Color Accuracy**  
Color Rendering Index (CRI) 90

**Light Color**  
Correlated Color Temperature (CCT) 3500 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-Z6SNG3 (10/11/2017)  
Model Number: 65BEMW LED 35K 90CRI [Upgrade : 10/11/2017]  
Type: Retrofit Kit - Downlight

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 845  
**Watts** 11.9  
**Lumens per Watt (Efficacy)** 71.01

**Color Accuracy**  
Color Rendering Index (CRI) 90

**Light Color**  
Correlated Color Temperature (CCT) 4000 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-7SATGV (8/15/2017)  
Model Number: 65BEMW LED 40K 90CRI  
Type: Retrofit Kit - Downlight

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 825  
**Watts** 12.12  
**Lumens per Watt (Efficacy)** 68.07

**Color Accuracy**  
Color Rendering Index (CRI) 90

**Light Color**  
Correlated Color Temperature (CCT) 5000 (Daylight)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: NJSM-QBZIK (8/15/2017)  
Model Number: 65BEMW LED 50K 90CRI  
Type: Retrofit Kit - Downlight

DIMMER LIST ESERIES — Low Lumen

Lutron	Synergy
AYCL-153P	ISD 600 I 120*
CTCL-153P	
DVCL-153P	

\*Must have minimum of qty 6 LED modules on a circuit to function.

PHOTOMETRICS

Distribution Curve


Distribution Data

Output Data


Coefficient of Utilization

Illuminance Data at 30" Above Floor for a Single Luminaire


65BEMW HL LED, 27K, input watts: 11.7, delivered lumens: 1083, LM/W = 92.5, test no. ISF 32419, tested in accordance with IESNA LM 79-08

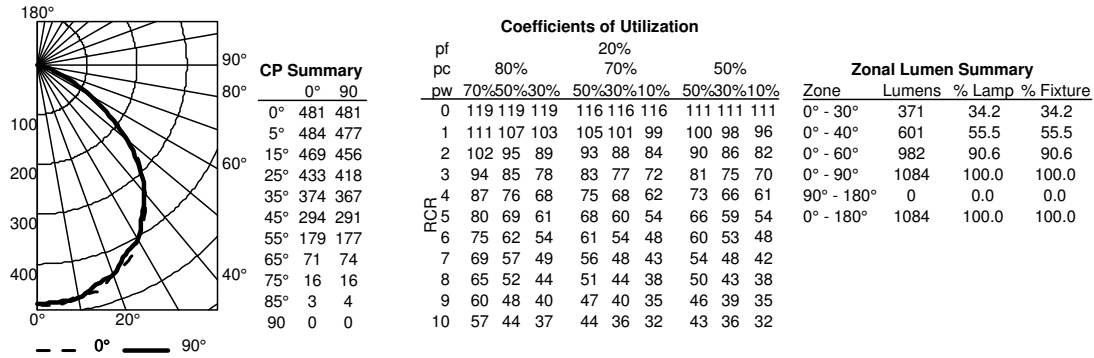

65BEMW HL LED, 30K, input watts: 11.9, delivered lumens: 1213, LM/W = 101.9, test no. ISF 32455, tested in accordance with IESNA LM 79-08

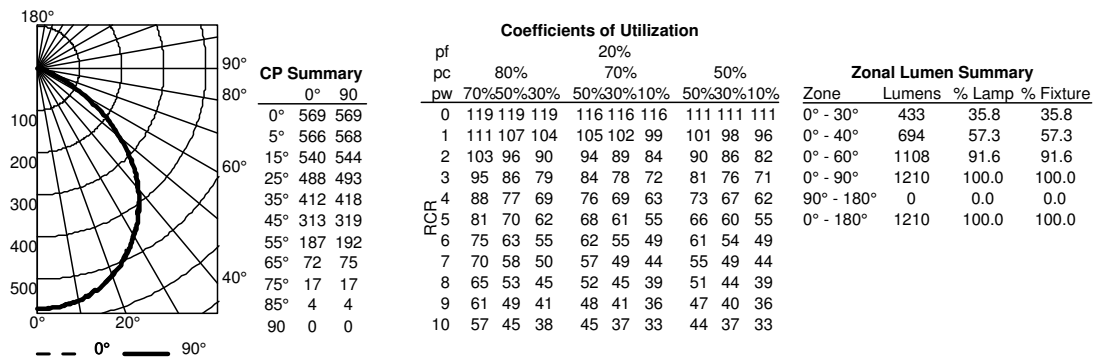

65BEMW HL LED, 40K, input watts: 11.7, delivered lumens: 1187, LM/W = 101.4, test no. ISF 32454, tested in accordance with IESNA LM 79-08

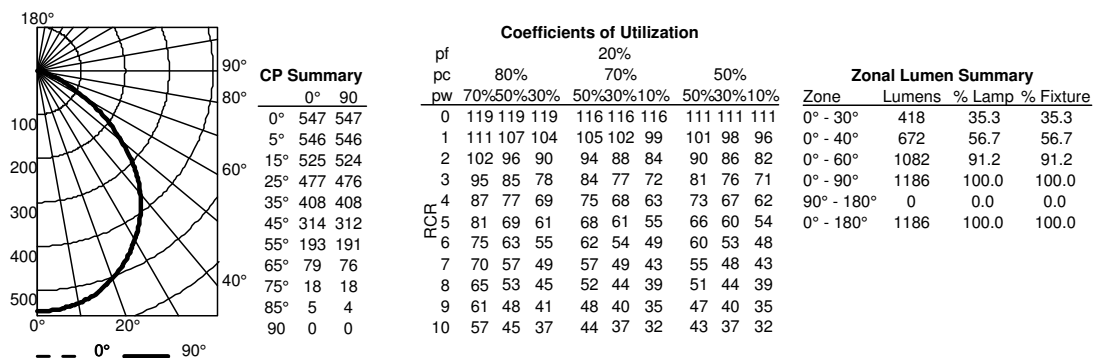

**ADDITIONAL DATA 65BEMW HL LED 27K**

ENERGY DATA*	
CRI - 80	
Lumens	1090
Min. starting temp	-18°C (0°F)
Max temp	46°C (115°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound Rating	A standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60Hz
Rated wattage	11.7W
Input power	11.7W
Input current	0.1A

\*Values at non-dimming line voltage.

**ADDITIONAL DATA 65BEMW HL LED 30K**

ENERGY DATA*	
CRI - 80	
Lumens	1100
Min. starting temp	-18°C (0°F)
Max. temp	46°C (115°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	A standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60Hz
Rated wattage	11.9W
Input power	11.9W
Input current	0.1A

\*Values at non-dimming line voltage.

**ADDITIONAL DATA 65BEMW HL LED 40K**

ENERGY DATA*	
CRI - 80	
Lumens	1110
Min. starting temp	-18°C (0°F)
Max. temp	46°C (115°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	A standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60Hz
Rated wattage	11.9W
Input power	11.9W
Input current	0.1A

\*Values at non-dimming line voltage.

**LIGHTING FACTS**

**Lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 1090  
**Watts** 11.7  
**Lumens per Watt (Efficacy)** 93.16

**Color Accuracy**  
Color Rendering Index (CRI) 80

**Light Color**  
Correlated Color Temperature (CCT) 2700 (Warm White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-7B0H2S (11/2/2016)  
Model Number: 65BEMW HLLED 27K  
Type: Luminaire - Downlight

**Lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 1100  
**Watts** 11.9  
**Lumens per Watt (Efficacy)** 92.44

**Color Accuracy**  
Color Rendering Index (CRI) 80

**Light Color**  
Correlated Color Temperature (CCT) 3000 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-8AM8EX (10/27/2016)  
Model Number: 65BEMW HLLED 30K  
Type: Luminaire - Downlight

**Lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 1110  
**Watts** 11.9  
**Lumens per Watt (Efficacy)** 93.28

**Color Accuracy**  
Color Rendering Index (CRI) 80

**Light Color**  
Correlated Color Temperature (CCT) 4000 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-YMQMDC (10/27/2016)  
Model Number: 65BEMW HLLED 40K  
Type: Luminaire - Downlight

**DIMMER LIST ESERIES — High Lumen**

Lutron	Leviton	Pass & Seymour	Cooper	Sensorswitch
DV-603P-LA	6633-PA	LS 603 PWV	DLC03P-W Devine	nSP5 PCD 2W
CT-603PR-WH	6615-P	H703PNICCV4		nSP5 PCD ELV 120
DVELV-300P				
300P SELV				
DV-600P				
NTELV-300P				