


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

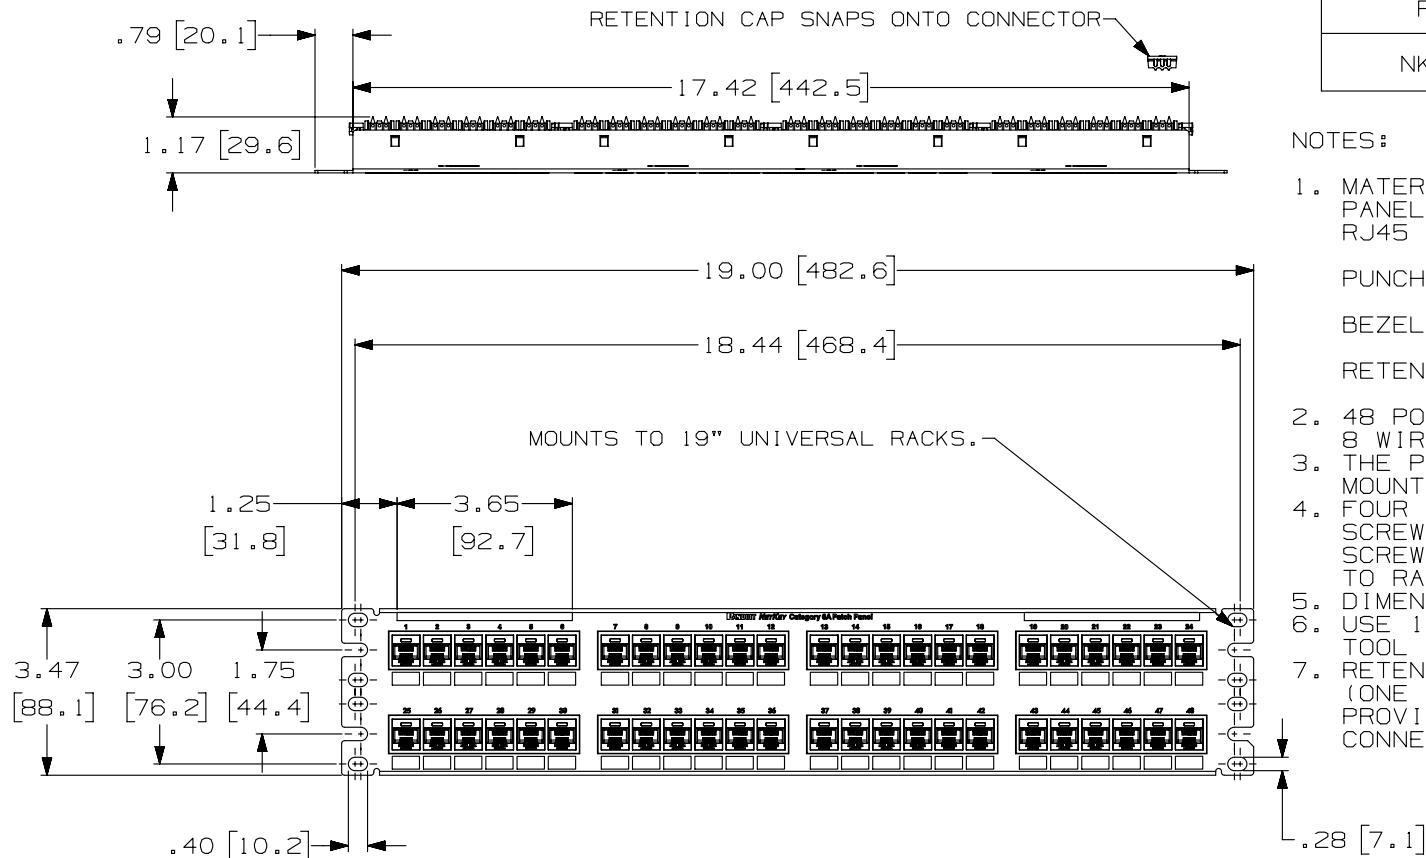

PANDUIT
PART NO.

WEIGHT
(APPOX.)

NK6XPPG48Y

2.2 lb (997.9 g)

NOTES:

1. MATERIAL:
PANEL HOUSING: STEEL
RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
2. 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
3. THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
4. FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6X1X15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
5. DIMENSIONS IN BRACKETS ARE IN METRIC.
6. USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
7. RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

PART NUMBER

SEE CHART

TITLE

NETKEY CAT6A 48 PORT PATCH PANEL

CUSTOMER DRAWING

ITEM REVISION NAME

M02479RQ/00


DATASET FILE NAME

M02479RQ_DC423/00A

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ±
.XX ± .03 [.8]

.XXX ± .010 [.3]
ANGLES ±



THIRD ANGLE
PROJECTION

MATERIAL:

SEE NOTE 1

DRAWING NUMBER:

02479-423

DRAWN BY

BJN

DATE

2-4-15

CHK

BJN

SCALE

.25 TO 1

SHT 1 OF 1

SIZE

A

R	2-4-15	BJN	MDJR	LPH	RELEASED TO PRODUCTION	02479-423	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	