



## Technical Specifications (continued)

### Installation:

Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation

### Finish:

Formulated for high durability and long-lasting color

### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.1A, 208V: 0.06A, 240V: 0.05A, 277V: 0.04A


#### THD:

9.5% at 120V, 11.2% at 277V

#### Power Factor:

99.1% at 120V, 96.7% at 277V

## Dimensions

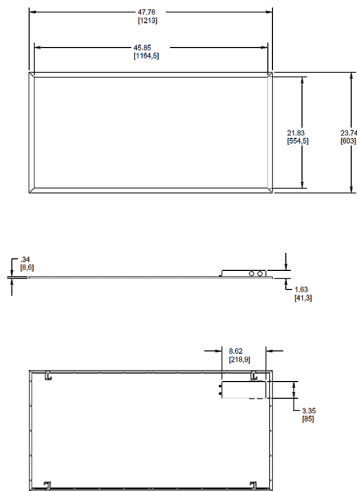

## Features

Best in class efficacy

Innovative use of edge lit technology for glare-free lighting

0-10V dimmable driver, standard

## Ordering Matrix

| Family  | Size          | Wattage                          | Color Temp   | Driver               | Options  |
|---------|---------------|----------------------------------|--|----------------------|--|
| EZPANHE | 2X4           | 46                               |  | /D10                 |  |
|         | 2X4 = 2' x 4' | 23 = 23W<br>30 = 30W<br>46 = 46W | Blank = 5000K Cool<br>N = 4000K Neutral<br>YN = 3500K Warm Neutral<br>Y = 3000K Warm | /D10 = 0-10V Dimming | Blank = No Option<br>/LC = Lightcloud Controller<br>/E2 = Battery 120-277V |

<sup>1</sup> The 2x4x2x4 12W is not DLC listed.