




Consistent with LEED® goals & Green Globes™ criteria for light pollution reduction

ACPOLED Series Floodlighting Roadway & Security Lighting FAO Module

FIELD ADJUSTABLE OUTPUT MODULE

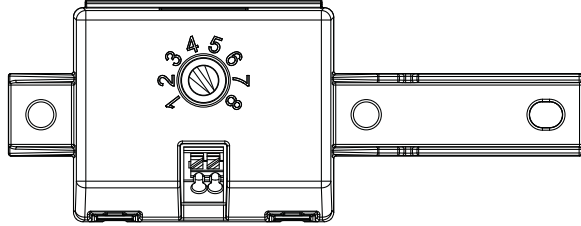

Field Adjustable Module

The Field Adjustable Output (FAO) module is an onboard device that adjusts the light output and input wattage to meet site specific requirements, allowing a single fixture configuration to be flexibly applied in many different applications.

Performance Package	FAO Position	% Lumens	% Wattage
P05	8	100%	100%
	7	94%	94%
	6	83%	82%
	5	72%	70%
	4	60%	58%
	3	49%	47%
	2	37%	35%
	1	26%	23%
P10	8	100%	100%
	7	94%	94%
	6	83%	81%
	5	71%	69%
	4	59%	57%
	3	48%	45%
	2	36%	33%
	1	24%	21%
P20	8	100%	100%
	7	94%	94%
	6	82%	81%
	5	71%	69%
	4	59%	56%
	3	46%	44%
	2	34%	32%
	1	21%	19%
P30	8	100%	100%
	7	94%	93%
	6	83%	81%
	5	71%	68%
	4	59%	55%
	3	46%	43%
	2	33%	30%
	1	20%	18%

Performance Package	FAO Position	% Lumens	% Wattage
P40	8	100%	100%
	7	94%	93%
	6	83%	80%
	5	71%	67%
	4	59%	55%
	3	46%	42%
	2	33%	30%
	1	20%	18%
P50	8	100%	100%
	7	94%	93%
	6	83%	80%
	5	71%	67%
	4	59%	55%
	3	47%	42%
	2	34%	30%
	1	20%	18%
P60	8	100%	100%
	7	84%	80%
	6	73%	68%
	5	62%	56%
	4	51%	45%
	3	39%	34%
	2	26%	24%
	1	20%	19%

Note: Specifications subject to change without notice. Actual performance may differ as a result of end-user environment and application.

