



# Nonmetallic A/C Whips

Commonly used in air conditioner, pool and sauna installations. Consists of UL listed flexible nonmetallic conduit, one nonmetallic straight connector and one nonmetallic 90° connector.



All Products Proudly Made in the USA

## Construction:

- Nonmetallic conduit Type NM is a helically wound integral Type B construction. It contains a spiral of rigid PVC reinforcement imbedded within the PVC wall.
- Corrosion, Oil and Sunlight Resistant

## Application:

Available in:

- 8 and 10 AWG Conductors
- Conduit sizes 1/2" and 3/4"
- 4 and 6 foot lengths

Packaged in standard cartons. For quantities of 500 or more, please consult factory.

Type NM is intended for installation in accordance with Article 356 of the NEC (ANSI/NFPA-70) for Flexible Liquidtight Nonmetallic Conduit (LFNC-B or FNMC-B).

- For containment of 1000 volt and lower potential circuits.
- Listed and marked for outdoor use.
- Wiring methods for pools and spas. Article 680.

## Markets:

Construction, Fixture / AC Whips, Pre-Wired Assemblies

## Product Information

### CERTIFICATIONS & COMPLIANCE



Listed File # E105410




WEEE and RoHS Compliant

### STANDARD COLORS

Machine Tool Gray.

### WORKING TEMPERATURES:

-20°C to 80°C Dry / 60°C Wet / 70°C Oil

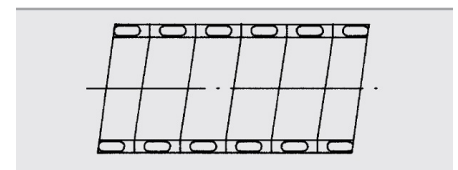

NM Type B

# Product Table

Description	Part Number	Number, Size and Wire Color of Conductors	Std. Pack Quantity
NM 11 1/2" x 48"	NMW1148311	3 # 10s BLK-RED-GRN	24
NM 11 1/2" x 72"	NMW1172311	3 # 10's BLK-RED-GRN	24
NM 12 3/4" x 48"	NMW1248381	2#8 BLK-RED; 1 #10 GRN	24
NM 12 3/4" x 72"	NMW1272381	2 # 8 BLK-RED; 1 #10 GRN	12

## related products



### Type NM

A general purpose, UL and CSA listed, nonmetallic liquidtight conduit offering excellent protection to wiring from abrasion, sunlight, mild acids, alkaline and oils. Often used for air conditioning hook-ups and other outdoor applications.

[see product detail »](#)



### Type NMLT & NMSC

Type NMLT and NMSC nonmetallic connectors are intended to be used with liquidtight nonmetallic conduit Type B. ( NM, NMHT, NMFG and NM2.) They are not to be used with Type A (LNM-P) conduit or steel conduit.

[see product detail »](#)



## Flexible Metal Pre-Assembled Whips

Used for lighting fixture installations as well as many other electrical equipment uses. These metallic whips consist of UL listed flexible metal conduit Type BR, stranded (stock) or solid THHN wire with 6" leads, and internal, zinc die-cast fittings with steel locknuts.

[see product detail »](#)