

## SPECIFICATION & FEATURES 2-GANG BLANK AND DEVICE COVERS

### FEATURES & DIMENSION:

- 2-Gang Blank and Device Covers
- Zinc Die Cast (Except 2-BC, 2-BC-G, & 2CA-2SW, 2CA-SW15, 2CA-SW20)
- Powder Coat Finish
- Gasket included
- Device mounted
- Meets NEC Article 406.9 (A) for damp and wet locations
- Width: 4-9/16"
- Height: 4-1/2"

### CERTIFICATION:




File E227970



Listed



Wet Location

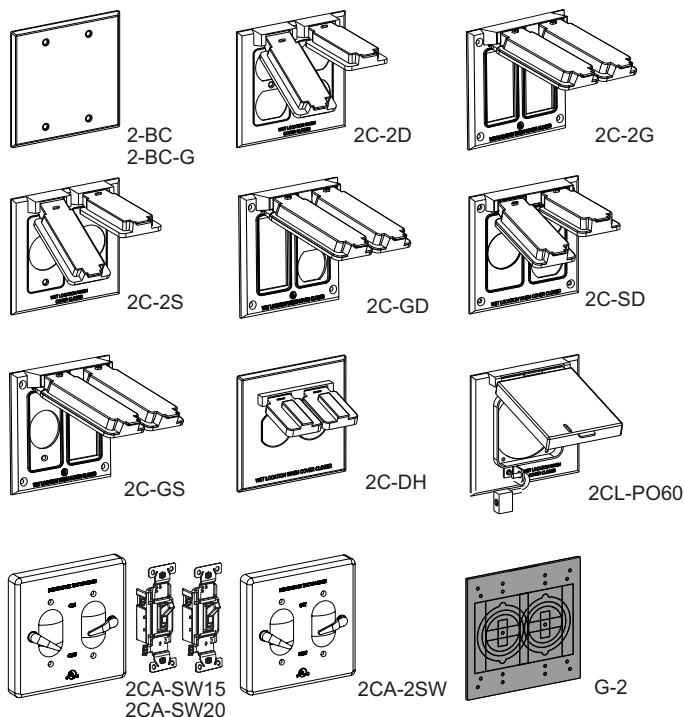

### CONFIGURATION DATA:

Part No.			Description	Std.Pkg.
Gray	Bronze	White		
2-BC	-	-	Aluminum Blank (unpainted)	25
2-BC-G	2-BC-BR	2-BC-W	Heavy-Duty Galvanized Steel Blank	25
2C-2D	2C-2D-BR	2C-2D-W	Two duplex receptacles	12
2C-2G	2C-2G-BR	2C-2G-W	Two GFCI	12
2C-2S	2C-2S-BR	2C-2S-WH	Single recept. or Two switches- 1.406" diameter	12
2C-GD	-	-	One GFCI, One Duplex	12
2C-SD	-	-	One Duplex, One Single recept. - 1.406" diameter	12
2C-GS	-	-	One GFCI, one switch or Single recept. - 1.406" diameter	12
2C-DH	-	-	Oversized One Duplex - Horizontal device mount unit has K.O.'s for box mounting	12
2CL-PO60	-	-	One 30, 50, 60 Amp 3 & 4 Wire 12 With Built-In Padlock Hasp - 2.641" diameter	12
2CA-2SW	2CA-2SW-BR	2CA-2SW-W	Two Aluminum Levers, compatible with Standard Toggle Switches	12
2CA-SW15	2CA-SW15-BR	2CA-SW15-W	Aluminum Two levers + Two 15A Single-Pole Switches	12
2CA-SW20	2CA-SW20-BR	2CA-SW20-W	Aluminum Two levers + Two 20A Single-Pole Switches	12
-	G-2 (Black Only)	-	Universal 2-Gang Foam Gasket	50

