

Bundling and Securing

Self-Affixing Cable Ties


TECHNICAL DATA SHEET

Edge Clip Cable Ties

Features and Benefits

- Easy, one-handed installation reduces strain.
- For edge thickness of 1 - 3 mm to fit many common panels.
- Non-metallic solution adds security for 1500V DC systems.
- Pre-assembled Solar Tie with edge clip saves time in the field.
- Tie head can be repositioned after bundling to avoid obstructions.

Material	Polyamide 12 (PA12), Polyamide 6.6, high impact modified, heat and UV-stabilized, proprietary blend (PA66HIRHSUVR5)
Color	Black (BK)
Operating Temperature	-40°F to +248°F (-40°C to +120°C), -31°F to +230°F (-35°C to +110°C)
Certifications	E64139 [cULus]

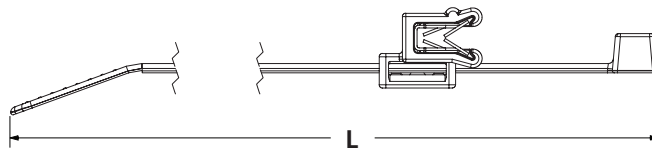

PART NO.	TYPE	Length (L) in. (mm)	Min. Tensile Strength lbs. (N)	Max. Bundle Diameter in. (mm)	Panel Thickness in. (mm)	Color	Pkg. Qty.
156-02971*	T50REC5A	8.00 (203.20)	50.00 (225.00)	2.00 (50.00)	0.04 - 0.12 (1.00 - 3.00)	Black	500

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.

Contact HellermannTyton for more information.

Visit www.hellermann.tyton.com or call 800.537.1512

Disclaimer: The information in this datasheet is for informational purposes only. Information is subject to change at any time without notice.

HellermannTyton