



**20 Amp, 125/250, 3Ø 250 and 3Ø 480 Volts AC  
3 Pole, 4 Wire, Grounding**



**HBL2421SW**

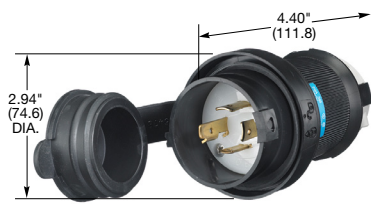


**HBL2421S**



**HBL2411**



**HBL2425SW**



**HBL2415**



**20A 125/250V AC  
NEMA L14-20P  
2 (1) HP**

**20A 3Ø 250V AC  
NEMA L15-20P  
3 HP**

**20A 3Ø 480V AC  
NEMA L16-20P  
5 HP**

## Plugs

### Watertight Safety-Shroud®

IP66 SUITABILITY

UL Type 4x, 12

Description	Cord Dia.	Catalog Number		
Black Valox® housing, white Valox® clamps.	.350"-1.150" (9-29)	<b>HBL2411SW</b>	<b>HBL2421SW</b>	<b>HBL2431SW</b>

### Safety-Shroud®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number		
Black and white nylon body, white Valox® shroud. Can be used with the Insulgrip Connector Bodies.	.350"-1.150" (9-29)	<b>HBL2411S</b>	<b>HBL2421S</b>	<b>HBL2431S</b>

*Note: See page B-52 for accessories.*

### Insulgrip®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number		
Black and white nylon.	.350"-1.150" (9-29)	<b>HBL2411</b>	<b>HBL2421</b>	<b>HBL2431</b>
Black and white nylon, spring termination.	.350"-1.150" (9-29)	<b>HBL2411ST</b>	<b>HBL2421ST</b>	<b>HBL2431ST</b>
Corrosion resistant, yellow nylon.	.350"-1.150" (9-29)	<b>HBL24CM11</b>	<b>HBL24CM21</b>	<b>HBL24CM31</b>
All black nylon.	.350"-1.150" (9-29)	<b>HBL2411BK</b>	-	-
All black nylon, spring termination	.350"-1.150" (9-29)	<b>HBL2411STBK</b>	-	-

*Note: See page B-52 for accessories.*

## Flanged Inlets

### Watertight Safety-Shroud®

IP66 SUITABILITY

UL Type 4x, 12

Description	Catalog Number		
Gray Valox® housing and flange.	<b>HBL2415SW</b>	<b>HBL2425SW</b>	<b>HBL2435SW</b>

*Note: See page B-54 for accessories.*

### Insulgrip®

IP20 SUITABILITY

Description	Catalog Number		
Nylon casing, back wired.	<b>HBL2415</b>	<b>HBL2425</b>	<b>HBL2435</b>
Nylon casing, spring termination.	<b>HBL2415ST</b>	<b>HBL2425ST</b>	<b>HBL2435ST</b>

*Note: See page B-52 for accessories.*

*See pages B-69 and B-70 for technical information on Twist-Lock and Watertight Safety-Shroud devices.*



**HBLMITL** - For use with Watertight Safety-Shroud receptacles, see page B-41.

Dimensions in Inches (mm)

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.