# Find the fit for your industry and application.

In our dedicated pursuit to help workers stay safe at heights, we have developed performance optimizations for a variety of industries and working applications.


# Find the fit for your industry and application with our NEW 3M<sup>™</sup> DBI-SALA<sup>®</sup> ExoFit<sup>™</sup> X-Style Harnesses.

Backed by science to fit your body. Our new quick-connect chest buckle, simplified harness sizing ranges, and leg straps have been designed with you in mind. No matter the season, wardrobe or body shape, the 3M™ DBI-SALA® ExoFit™ X300 Comfort X Style Safety Harness will help ensure you select a harness that fits your body securely.



#### General Industry

Equipped with lightweight aluminum dorsal D-ring (automatic stand-up D-ring design enables easier connections).





### Construction

Equipped with robust belt loops, lightweight aluminum positioning D-rings and supportive bar to redistribute tongue-buckle belt on





#### Construction Weight Distribution

construction hip pad and lightweight back weight and fatigue from shoulder area.



1403098

1403099

1403100

1403101

1403102

Equipped with robust



Wind Energy

Equipped with front D-ring for climbing, side D-rings and seat sling for comfortable positioning at height.

Featured X300 Harne

2X-Large 111321

Medium

X-Large

111321

1113213



**Telecommunications** 

Equipped with front D-ring for climbing, side D-rings and seat sling for comfortable positioning at height.

ss	Featured X300 Harness			
)	Small	1113190		
1	Medium	1113191		
2	Large	1113192		
3	X-Large	1113193		
4	2X-Large	1113194		



X-Style General Industry



X-Style Construction



**General Industry** Climbing



X-Style Climbing/ **Positoning** (Wind Energy)



X-Style **Tower Climbing** (Telecommunications)

Equipped with contoured form-fitting chest configuration to don easily in 'X' shape. X-Style harness buckle contours to your body, providing an optimal central connection. New horizontal leg straps complement the range of motion workers require on the jobsite.

Featured X300 Harness		Featured X300 Harness		Featured X300 Ha	
3X-Small/ 2X-Small	1403237	3X-Small/ 2X-Small	1403240	3X-Small/ 2X-Small	1403
X-Small/ Small	1403198	X-Small/ Small	1403207	X-Small/ Small	1403
Medium/ Large	1403199	Medium/ Large	1403208	Medium/ Large	1403
X-Large/ 2X-Large	1403200	X-Large/ 2X-Large	1403209	X-Large/ 2X-Large	1403

Featured X300 Harness			Featured X300 Harnes		
3X-Small/ 2X-Small	1403238		3X-Small/ 2X-Small	1403242	
X-Small/ Small	1403201		X-Small/ Small	1403213	
Medium/ Large	1403202		Medium/ Large	1403214	
X-Large/ 2X-Large	1403203		X-Large/ 2X-Large	1403215	


ss	Featured X	Featured X300 Harness				
2	3X-Small/ 2X-Small	1403241				
3	X-Small/ Small	1403210				
4	Medium/ Large	1403211				
5	X-Large/ 2X-Large	1403212				





## Designed for ultimate productivity and performance.

Wherever your work takes you, staying comfortably fitted in your safety harness is critical. Precision-tuned for performance and productivity, our new line of 3M™ DBI-SALA® ExoFit™ X Series Harnesses change the way you work and redefine what you should expect from a safety harness.

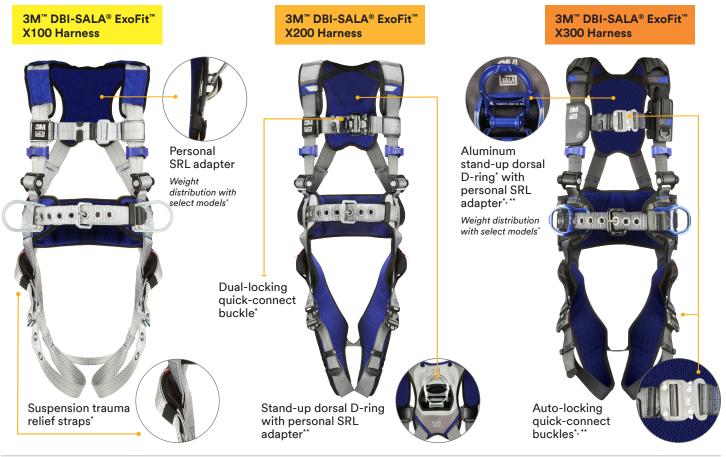

3M™ DBI-SALA® **ExoFit™ X-Series** Harnesses come equipped with these standard harness features:

#### Revolving Torso Adjusters\*,\*\*

 Patented buckles lock webbing into place to maintain a safe and comfortable fit.

#### Personal SRL Adapter\*,\*\*

 Confidently connect personal SRLs to the harness with ease.

#### **Anti-Slide Dorsal D-Ring Pad**

• Greatly reduces dorsal D-ring slide and allows for adjustment to help ensure a proper and safe fit.

#### Suspension Trauma Relief Straps\*

 Integrated low-profile design between harness webbing.

#### **Auto-Resetting Lanyard Keepers\***

• Fast and easy parking of snap hooks and carabiners.

#### **Comfort Padding**

• Features breathable mesh under-side.

#### **Integrated RFID**

• RFID technology for simplified inventory, inspection and record management.


 Tested and certified to ANSI/ASSP Z359.11 2021 (310 lbs.) standard. Conforms to the requirements of 29 CFR OSHA 1910.140 and 1926.502. (420 lbs.) regulations.

> \*3M Patented Design/Feature \*\*Available on select models


3M™ DBI-SALA® ExoFit™ X300 Harness

## For those who refuse to compromise.

One of the most advanced harnesses just got better. With industry-leading comfort and fit, it's optimized to help increase the performance and productivity of professionals who take pride in a job done right.

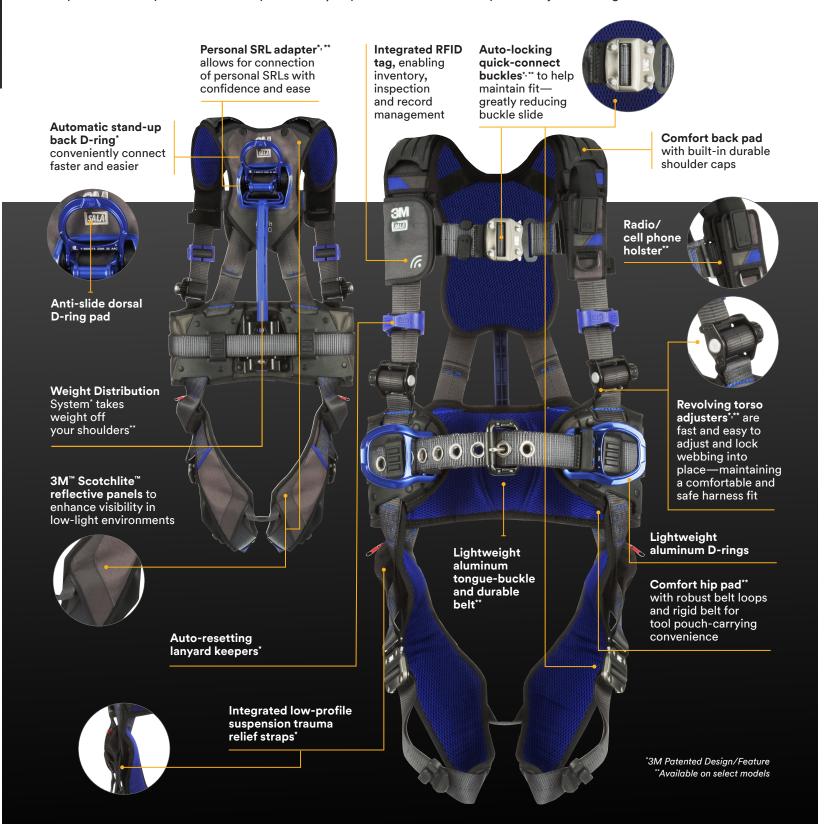

### 3M™ DBI-SALA® ExoFit™ X-Series Harnesses **Feature Matrix**

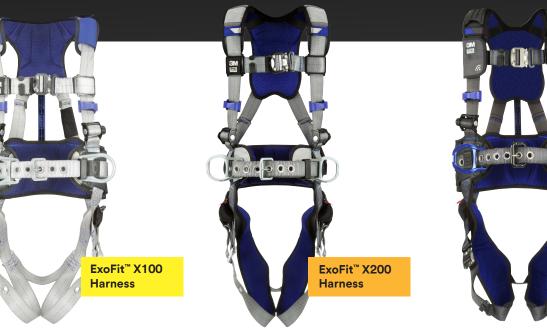

Feature	X100	X200	X300
Personal SRL Adapter*,**	Molded Tunnel	Steel	Aluminum
Exclusive Weight Distribution System Models Available*,**	<b>✓</b>		✓
Breathable Shoulder Pads	Removable	Mesh Design	Durable Shoulder Cap Design
Leg Padding	Accessory Kit Available	<b>✓</b>	✓
Exclusive Automatic Stand-Up D-ring*		Steel	Aluminum
Exclusive Locking Buckles Available*,**		Dual-Locking Quick-Connect	Auto-Locking Quick-Connect
Lightweight Aluminum Hardware Models Available		<b>√</b>	✓
3M <sup>™</sup> Scotchlite <sup>™</sup> Reflective Material			Padding Panels
Exclusive X-Style Quick-Connect Chest Buckle Models Available*,**			✓

Please check our full product list to find the harnesses that best accommodate you and your team.

\*3M Patented Design/Feature \*\*Available on select models

#### New ExoFit™ comfort harnesses available in a variety of styles:

- Vest Climbing
- Vest Positioning
- Vest Retrieval
- Vest Climbing/Positioning
- Vest Climbing/Positioning/Retrieval
- X-Style

- Construction
- Construction Climbing
- Construction Positioning
- Construction Climbing/Positioning Construction Weight Distribution
- Construction Weight Distribution Climbing/Positioning
- Wind Energy Vest Climbing/ Positioning

Tower Climbing/Positioning

- Wind Energy Construction Climbing/Positioning
- Oil & Gas Vest Climbing/Positioning
- Oil & Gas Construction Climbing/ Positioning
- Construction Mining