

**CBRK, RSRK, SSRK**  
LED Retrofit Kits


**Metalux**



*Troffer*



*Strip*

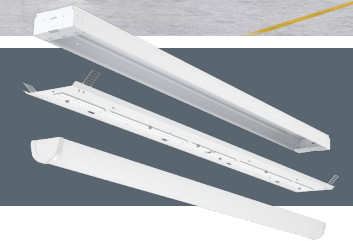

add → modify → modernize

# Metalux LED Retrofit Kits

add → modify → modernize

Celebrating **50+ years**, Metalux offers an extensive line of LED lighting products including LED retrofit kits.

Metalux's complete family of LED retrofit kit lighting products are dedicated to the latest solid state lighting and driver technology for optimal performance and energy efficiency. Metalux delivers innovation, quality, product availability, and responsiveness all with an affordable value proposition.

### Simple and quick installation

- Installs in minutes = **significant labor cost savings**
- Utilize the existing fluorescent luminaire's housing = **lower disposal costs**

### Reduced energy consumption

- High performance efficacy = **significant energy savings vs. fluorescent**
- DesignLights Consortium® Qualified

### Architectural style aesthetics

- Modern styling with aesthetic appeal vs. fluorescent
- Designed for commercial office, education, healthcare, and retail applications

### Integrated controls

- Daylight harvesting and occupancy sensing
- Code compliance and IoT value-added applications



## Troffer Cooper Kit - CBRK Retrofit Kit



Pg. 3-4

## Recessed Strip RSRK Retrofit Kit

RSRK Retrofit Kit



Pg. 5-6

## Surface Strip SSRK Retrofit Kit

SSRK Retrofit Kit



Pg. 7-8

add → modify → modernize

# Troffer



**Metalux**



## Cooper Kit - CBRK Retrofit Kit

The Metalux CooperKit from Cooper Lighting Solutions is a LED lighting solution for customers looking to upgrade their fluorescent luminaires to a high performing aesthetically-pleasing LED system without the need to install a complete luminaire.

This innovative, high quality retrofit kit is dedicated to the latest solid state lighting and driver technology for optimal performance and energy efficiency. The retrofit kit is engineered for simple and quick installation making it easy to switch to LED.

[Learn more](#)

**Easy and quick installation**

**Contemporary and modern design**

**Reduced energy consumption**

**DLC Premium listed**

**Integrated sensors with IOT Connectivity**

**Minimal glare**



### Construction

Kits consists of main panel, side panel, 2 endplates, and a lens

Recessed: 1' x 4', 2' x 2' and 2' x 4'

Shallow depth: 3.25"

cULus - Damp location / IC Rated

### Performance

Extremely high efficacies up to 162 lumens per watt\*

DesignLights Consortium® Qualified for Standard and Premium

Two CCT Colors: 3500K and 4000K at a minimum CRI of 80+

L85 @ 60,000 hrs

5-year limited warranty

\* Based on photometric testing consistent with IES LM-79. Actual wattage may vary by +/- 10%. Actual initial lumen output may vary +/- 10%.

### Controls

Drivers with 0-10V dimming allow for maximum fixture efficiency and provide 10% dimming

Optional integrated sensor system for daylighting harvesting and occupancy sensing

Includes WaveLinx/WaveLix Lite sensor compatible for stand alone, controlled, connected, and IOT capability\*

\* Based on photometric testing consistent with IES LM-79. Actual wattage may vary by +/- 10%. Actual initial lumen output may vary +/- 10%.

### Certifications



## Installs in minutes!



### Energy savings

Operating and maintenance costs of a lighting system are dramatically impacted by the specified lamp source and electrical system. Total system input watts and fixture operating life should be the driving considerations when addressing energy consumption and total cost of ownership. Energy savings increase when energy consumption is reduced and maintenance intervals are extended.



### Energy Performance Table

Standard Efficacy versions shown in chart. High Performance options are available for additional energy savings.

1' x 4' CBRK*			Popular Fluorescent Fixtures			Energy Savings
Catalog Number	Lumens**	Wattage	Fixture Type	Lumens**	Wattage	
14CBRK-30-UNV-L835-CD1-U	3000	22	Parabolic 232	3136	52.0	56%
			Troffer 232	3920		
			Indirect Basket 332	3248		
2' x 2' CBRK			Popular Fluorescent Fixtures			Energy Savings
Catalog Number	Lumens**	Wattage	Fixture Type	Lumens**	Wattage	
22CBRK-31-UNV-L835-CD1-U	3100	21	Troffer 2U6T8	3862	52.1	71%
			Troffer 317	2601	42.9	65%
			Parabolic 317	2588	49.1	69%
2' x 4' CBRK			Popular Fluorescent Fixtures			Energy Savings
Catalog Number	Lumens**	Wattage	Fixture Type	Lumens**	Wattage	
24CBRK-36-UNV-L835-CD1-U	3600	25	Troffer 232	4310	52.0	52%
			Indirect Basket 232	3873	52.0	52%

\*Consult factory for availability. \*\*Lumens listed are nominal delivered lumens. Refer to specification sheets for detailed catalog ordering information

add → modify → modernize

# Recessed Strip



**Metalux**



## RSRK Retrofit Kit

The Metalux RSRK LED Recessed Strip Retrofit Kits is a series of products developed to convert recessed linear products to LED while improving the lighting in the existing space. The kit consists of three primary components: mounting brackets, gear tray with LED boards, driver and lens. The RSRK is engineered for simple and quick installation and offers customers the opportunity to retrofit from fluorescent to LED affordably and efficiently.

[Learn more](#)



**Simple and quick installation = labor savings!**

**Up to 8800 lumens (4') and 17500 lumens (8')**

**Market leading efficacy at nearly 170 LPW**

**IP40 Rated**

**Lens optimization for greater optical control**

### Certifications



LM79 / LM80 Compliant



### Construction


- Kit consists of mounting brackets, gear tray with LED boards, driver, and lens
- Ballast can remain in fixture to reduce disposal costs
- 4', 6' and 8' options
- Acrylic lens (round or trilobe)

### Performance

- Premium level efficacy up to 168 lm/W
- DesignLights Consortium® Qualified
- Four CCT Colors: 3000K, 3500K, 4000K, and 5000K
- L94 @ 60,000 hrs
- 5-year limited warranty

### Controls


- 0-10V dimming driver (1% standard)
- Optional integrated sensor system for daylighting harvesting and occupancy sensing
- Optional WaveLinX Wireless and Enlighted for fully integrated sensor system with Internet of Things (IoT) connectivity and configurable software

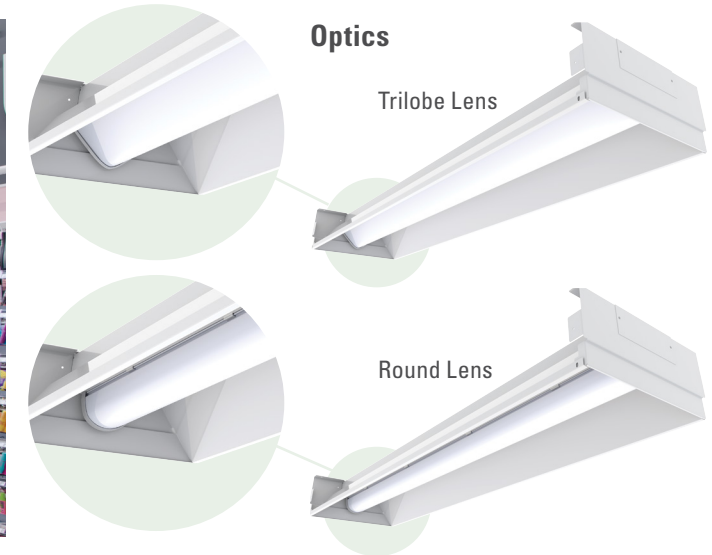


### Energy and performance data

Catalog Logic	Fixture Total Length	Watts with standard 0-10V driver	No Lens Performance		TB - Trilobe Ribbed Lens Performance		TS - Trilobe Smooth Lens Performance		RM - Round Ribbed	
			Delivered Lumens @ 80 CRI, 4000K	Efficacy (LPW)	Delivered Lumens @ 80 CRI, 4000K	Efficacy (LPW)	Delivered Lumens @ 80 CRI, 4000K	Efficacy LPW)	Delivered Lumens @ 80 CRI, 4000K	Efficacy (LPW)
4-RSRK-50-HE-L840-U	4'	15.5	2308	159.1	2064	142.3	1955	134.8	2192	141.4
4-RSRK-65-HE-L840-U	4'	18.9	2994	158.4	2678	141.7	2536	134.2	2844	150.5
4-RSRK-100-HE-L840-U	4'	28.8	4577	158.9	4094	142.2	3877	134.6	4347	151.0
4-RSRK-150-HE-L840-U	4'	44.2	6737	152.4	6026	136.3	5707	129.1	6399	144.8
4-RSRK-200-HE-L840-U	4'	61.2	8881	145.1	7944	129.8	7523	122.9	8436	137.8
6-RSRK-50-HE-L840-U	6'	20.9	3461	165.6	3096	148.1	2932	140.3	3288	157.3
6-RSRK-65-HE-L840-U	6'	27.8	4491	161.5	4017	144.5	3804	136.8	4266	153.4
6-RSRK-100-HE-L840-U	6'	43.1	6866	159.3	6141	142.5	5816	134.9	6521	151.3
6-RSRK-150-HE-L840-U	6'	64	10106	157.9	9039	141.2	8560	133.7	9599	150.0
6-RSRK-200-HE-L840-U	6'	95.1	13322	140.1	11916	125.3	11284	118.7	12654	133.1
8-RSRK-50-HE-L840-U	8'	27.5	4615	167.8	4128.0	150.1	3909	142.2	4384	159.4
8-RSRK-65-HE-L840-U	8'	36.8	5988	162.7	5356.0	145.5	5072	137.8	5688	154.6
8-RSRK-100-HE-L840-U	8'	55.7	9154	164.3	8188.0	147.0	7754	139.2	8695	156.1
8-RSRK-150-HE-L840-U	8'	85.7	13474	157.2	12052.0	140.6	11413	133.2	12798	149.3
8-RSRK-200-HE-L840-U	8'	122.4	17763	145.1	15888.0	129.8	15046	122.9	16871	137.8

add → modify → modernize  
**Surface Strip**

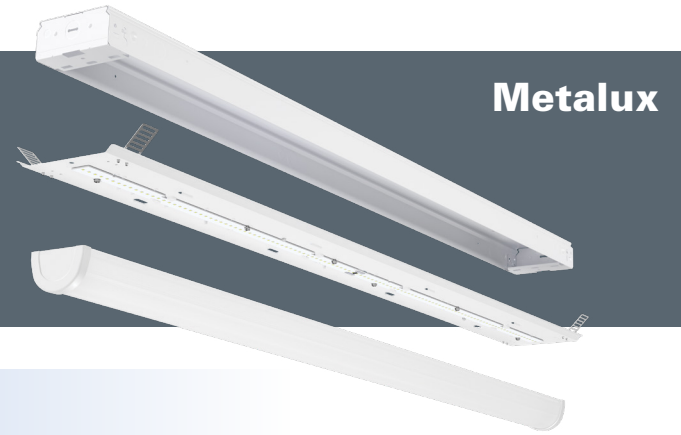

**Metalux**

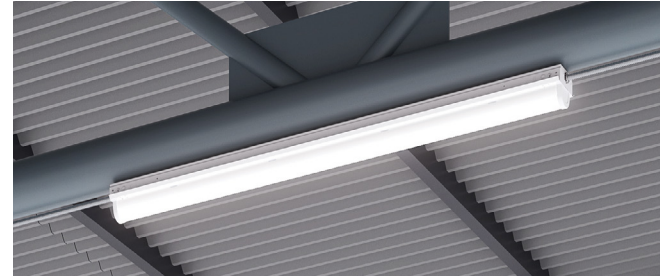

## SSRK Retrofit Kit

The SSRK series is a LED retrofit kit capable of replacing 4 foot lengths of fluorescent or LED fixtures with a width from 2.5 to 4.5 inches and a channel minimum depth of 1.75 inches. Five different highly efficient lumen packages (130 to 150 lumens/watt) ensure maximum ROI due to energy savings and eligible rebate incentives. Key features include electrical quick connects and adhesive tape on mounting brackets that result in market leading installation time as well as dimming, occupancy and emergency options that maximize design flexibility. The SSRK series is ideal for retrofit applications where existing fixtures are installed with fixed conduit.

[Learn more](#)



**Simple and quick installation = labor savings!**

**Three lens options: round, square, & tri-lobe; multiple distributions**

**Integrated emergency available**

**Design flexibility**

**Retrofit "pipe & wire" installation in industrial and warehousing applications**

### Certifications



LM79 / LM80  
Compliant



### Construction

Kit consists of gear tray with LED boards, mounting brackets and driver as one component

4' or 8' LED strip retrofit with up to 8000 lumens per 4ft segment

Retrofits from 2.5 to 4.5 inch width fixtures

Adhesive tape on mounting brackets to free up hands during installation

### Performance

Premium level efficacy up to 159 lm/W

DesignLights Consortium® Qualified for Standard and Premium

Four CCT Colors: 3000K, 3500K, 4000K, and 5000K

L87 @ 60,000 hrs

5-year limited warranty

### Controls

0-10V dimming driver (1% standard)

Optional integrated sensor system for daylighting harvesting and occupancy sensing



### Optics

Round Lens



Tri-lobe Lens



Square Lens



### Performance data

Lumen Package (Lumens per foot)	Nominal Lumens per foot	Watts	Efficacy (Lumens per watt)
500	537	13.7	156.8
750	812	20.4	159.3
1000	1080	27.7	156.0
1500	1637	44.8	146.2
2000	2186	62.9	139.0

4ft Fixture - Round Clear Lens, 4000K, 80CRI

### Lumens calculator

CCT Multiplier	80 CRI Multiplier
3000K	0.97
3500K	0.98
4000K	1.00
5000K	1.00

### Lens table

Approximate Lumen Multiplier	
No Lens	1.000
TS	0.842
TB	0.884
LC	0.961
LN	0.934
LW	0.831
SLC	0.984
SLN	0.951
SLW	0.882

### **Lighting Brands**

Ametrix  
AtLite  
Corelite  
Ephesus  
Fail-Safe  
Halo  
Halo Commercial  
Invue  
io  
Iris  
Lumark  
Lumière  
McGraw-Edison  
Metalux  
MWS  
Neo-Ray  
Portfolio  
RSA  
Shaper  
Shaper PrentaLux - 3D Printed Lighting  
Streetworks  
Sure-Lites  
Telensa

### **Controls Brands**

Greengate  
Fifth Light

### **Connected Lighting Systems**

WaveLinx

### **IoT Platforms**

Trellix



**Cooper Lighting Solutions**  
1121 Highway 74 South  
Peachtree City, GA 30269  
P: 770-486-4800  
[www.cooperlighting.com](http://www.cooperlighting.com)

Canada Sales  
5925 McLaughlin Road  
Mississauga, Ontario L5R 1B8  
P: 905-501-3000  
F: 905-501-3172

© 2022 Cooper Lighting Solutions  
All Rights Reserved  
Printed in USA  
Publication No. BR519049EN  
November 17, 2022 9:56 AM

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.