

HU11

Value LED Undercabinet


HALO



halolighting.com

HU11 Value LED undercabinet





HALO® introduces the HU11 to address your LED undercabinet and task lighting needs.

Ideal for task, accent, office, cove, utility and display lighting, the HALO Undercabinet low-profile design delivers maximum energy savings and long life. The integrated driver allows 120V direct to the fixture for easy installation. Available in multiple lengths, the HU11 can be configured to fit almost anywhere. The HU11 has smooth dimming down to 5% using a TRIAC (leading edge) or ELV (trailing edge) dimmer. Connector cables, in a variety of different lengths, make it easy to link one unit to another. Each unit features an integrated on-off switch.

Value LED undercabinet


Features

- SeleCCTable™ color temperature for flexible lighting effects and applications (2700K, 3000K or 4000K)
- Sleek and seamless <1" profile
- Delivers up to 60 Lumens per Watt
- 90 CRI
- Dimmable down to 5% with select 120V dimmers
- Multiple wiring options including flexible conduit, romex or plugin
- Back wire option for increased space utilization***
- 120V input
- Lumen maintenance (L70) at 50,000 hours
- 5-year warranty
- Damp location listed



Selectable CCT

Three position external seleCCTable color temperature switch allows users to choose between 2700K, 3000K, and 4000K and adjust to their lighting needs.

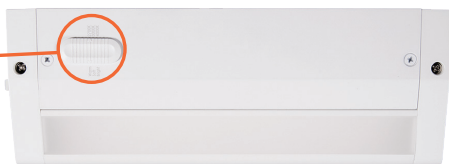

2700K




3000K



4000K

Dimensions

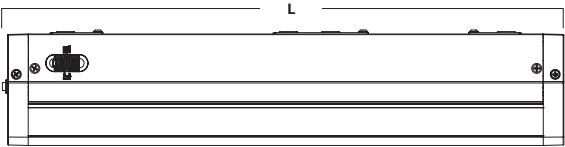

Size	9 in. Nominal	18 in. Nominal	24 in. Nominal	36 in. Nominal	48 in. Nominal
Length "L"	8.98" [228.1mm]	16.55" [420.4mm]	23.98" [609.1mm]	32.44" [824mm]	47.18" [1,198.4mm]



Energy Data

	Lumens	120V Input Watts
9" Fixture	300	4.5
18" Fixture	560	8.0
24" Fixture	785	11.0
36" Fixture	1125	15.5
48" Fixture	1540	21.0

Power Factor	> 0.9
THD	< 20%
Color Temperature	2700K 3000K 4000K
Color Rendering Index	90
Nominal Lumens/Ft.	300



Ordering Information

Sample Number: **HU1118DSP** (18" dimmable fixture, 90 CRI, selectable color temperature, White finish)

Family	Length	Dimming	Color Temp	Finish
HU11 = Halo integrated undercabinet	09 = 9" 18 = 18" 24 = 24" 36 = 36" 48 = 48"	D9 = Dimmable	S = Selectable (2700K, 3000K, 4000K)	P = White MB = Matte Black

Connectors & Accessories



3" Daisy Chain Connector
HU101



6" Daisy Chain Connector
HU102



12" Daisy Chain Connector
HU1010



18" Daisy Chain Connector
HU1011



24" Daisy Chain Connector
HU103



120" Daisy Chain Connector
HU104




48" Power Cord - 120V only
HU115



1-1/2" Male-to-Male Connector
HU107



Splice Box
HU109





Master Switch
HU10MS

Finish: **P** = White; **MB** = Matte Black
Example: HU101P = 3" Daisy Chain Connector, White



Wiring Flexibility

The HU11 has the ability to bring flexible conduit or armored cable directly into the fixture from the back to allow for increased space savings. Conduit connector and armored cable strain relief hardware is included in each fixture. In addition, users can also utilize the various available plug in connectors for 120V applications.

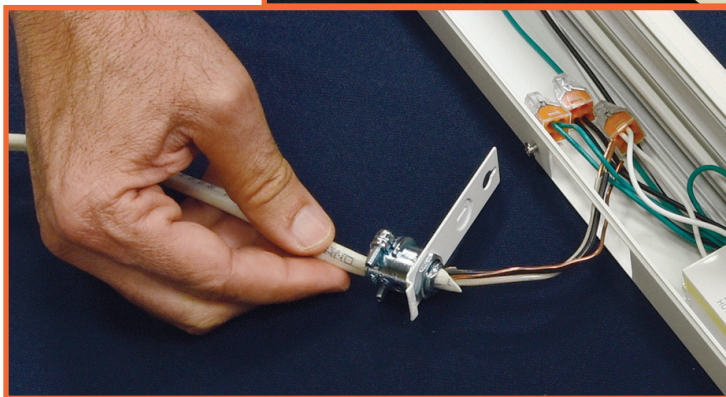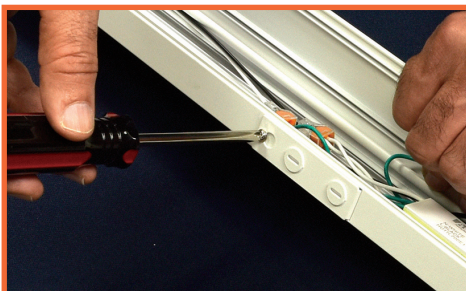

Cooper Lighting Solutions

1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.halolighting.com

Canada Sales

5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

Our Lighting Product Lines

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
io
IRiS
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
RSA
Shaper
Streetworks
Sure-Lites

Our Controls Product Lines

Fifth Light Technology
Greengate
iLight (International Only)
iLumin
Zero 88

Connected Lighting Systems

Distributed Low-Voltage Power
HALO Home
iLumen Plus
LumaWatt Pro
WaveLinx

Cooper Lighting Solutions

1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.halolighting.com

© 2020 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. BR518065EN
February 2020

Products, specifications and
compliances are subject to
change without notice.

Cooper Lighting Solutions is a
registered trademark.

All other trademarks are property
of their respective owners.

