


A modern office interior featuring a wooden desk, a black ergonomic chair, and a silver computer monitor. The room has dark blue walls and a wooden floor. A framed picture of a city building is on the wall. The ceiling has two recessed lights.

HALO[®]

RL-DM / RA-DM
LED Direct Mount Collection

HALO™ SeleCCTable Family

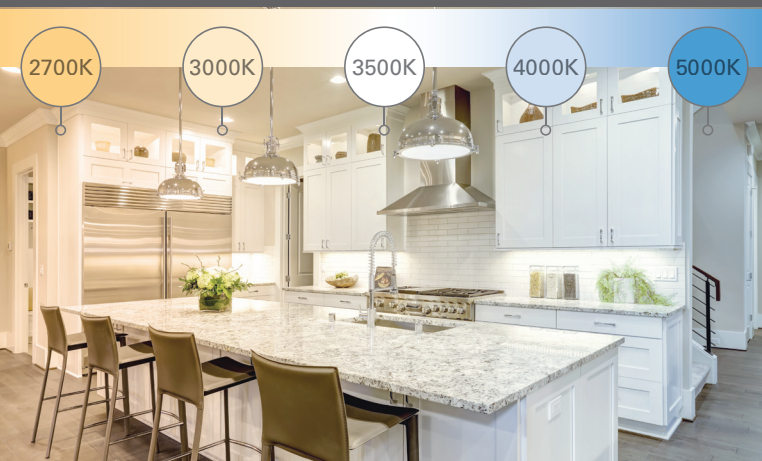

RL-DM / RA-DM SeleCCTable Series



RL4069S1EWHDM
4" LED Retrofit Baffle-Trim,
Direct Mount, 600 lumen



RL6069S1EWHDM
6" LED Retrofit Baffle-Trim,
Direct Mount, 600 lumen




RA4069S1EWHDMR
4" LED Adjustable Gimbal,
Direct Mount, 600 lumen



RA6069S1EWHDMR
6" LED Adjustable Gimbal,
Direct Mount, 600 lumen


The SeleCCTable technology puts flexibility at your fingertips. By using the switch located on the driver junction box, the user can choose from a range of five color temperatures 2700K - 5000K.

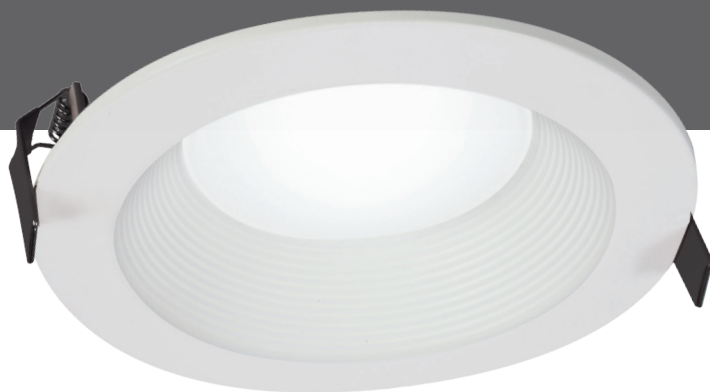

The RL downlight and RA adjustable direct mount LED modules come with a remote driver / junction box ideal for new construction and renovation work.

Simplified installation in drywall or suspended ceilings eliminates recessed cans saving time and money.

Distribution patterns work well in low to medium ceiling heights, applications are virtually universal including living and dining areas, bedrooms, closets, hallways, bathrooms, kitchens, basements, soffits, entryways and porches.

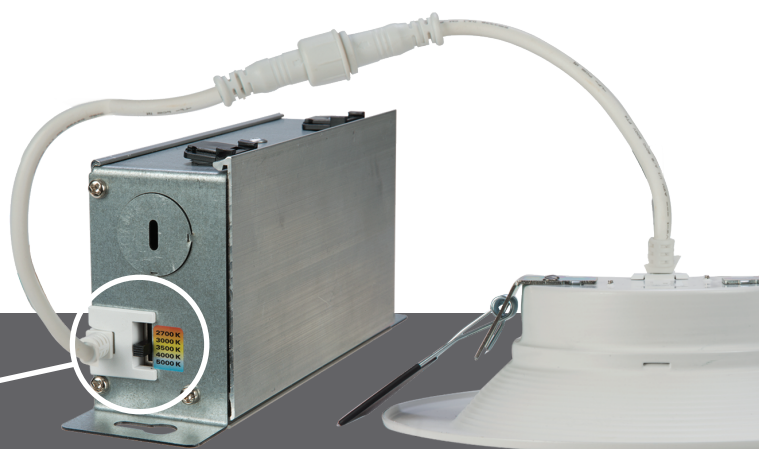


2700K • 3000K • 3500K
4000K • 5000K




RL/RA SeleCCTable Direct Mount Series

The RL-DM and RA-DM install into a standard hole saw size cutout and is retained securely in place with springs.


The driver junction box installs through a cutout and can be positioned remotely from the fixture fitting. The keyhole slots facilitate attachment to the building structure.

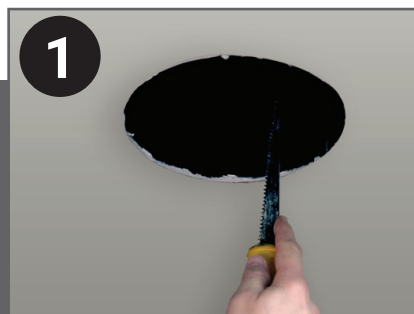

New Construction Mounting Frame

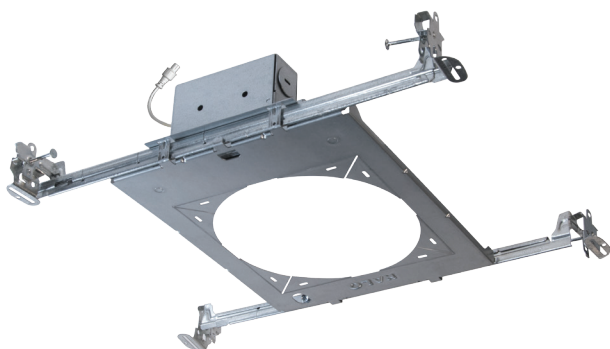

The new construction mounting frame locates the fixture fitting during electrical rough-in. HALO's patented Got Nail!® bar hangers are pre-installed supporting the mounting frame along rails.

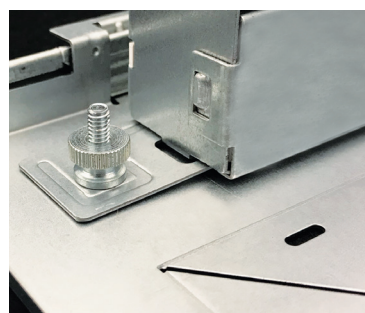

HL4RSMF - 4" round and square mounting frame

HL6RSMF - 6" round and square mounting frame

During electrical rough-in, the driver / junction box attaches to the mounting frame with captive fasteners meeting code requirements for attachment to the building structure.

See page 14 for more details.

RL4 SeleCCTable Direct Mount Series



- 600 Series: up to 621 lumens¹
 - Use to replace 60W PAR16, 50W PAR20 or 40W R20 lamp
 - 2700K, 3000K, 3500K, 4000K, 5000K CCT² all in one
 - 90 CRI
 - 600 Series: 8.7W, 120V
 - L70 @ 70,000 hrs
 - HALO matte white finish
 - Requires no housing or junction box
 - Aluminum jbox IC rated
 - Aluminum jbox includes (2) 1/2" conduit pry-out & (2) Slide-N-Side
- Can be installed in 1/2" to 1-1/4" thick ceilings
 - Dimmable to 5% with select dimmers
 - Damp and wet location listed (shower rated)
 - Rated for IC, ICAT and may be used in Non-IC housings
 - AIR-TITE™ certified per ASTM-E283
 - Diffusing, regressed lens
 - Five-year limited warranty

1. Lumens per selected CCT
2. CCT - Correlated Color Temperature



Ordering Information

SAMPLE NUMBER: RL4069S1EWHDM

Models	Lumens	CRI / CCT
RL4 = 4-Inch all-purpose retrofit LED module	06=600 lumen (nominal)	9S=90 CRI minimum, white tuning, selectable 2700, 3000, 3500, 4000 or 5000K CCT
Driver	Finish	Mounting
1E= 120V 60Hz, LE & TE phase cut 5% dimming	WH= matte white flange	DM= Direct Mount



Refer to ENERGY STAR® Certified Products List.
Can be used to comply with California Title 24 High Efficacy requirements.
Certified to California Appliance Efficiency Database under JA8.

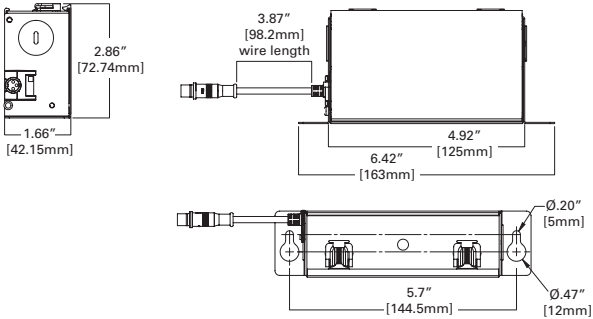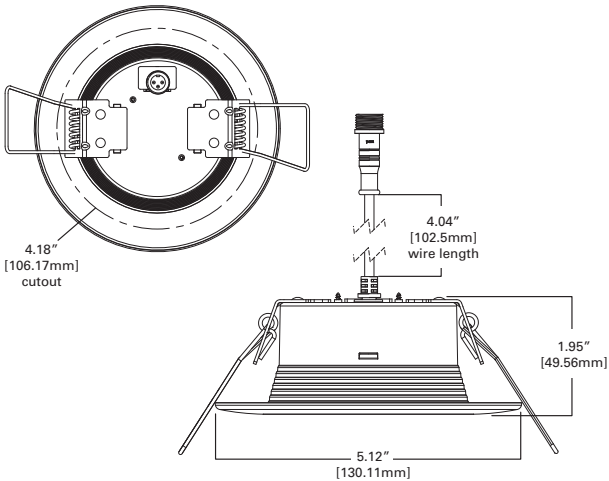

RL4-DM Energy Data	600 Series
Max. Lumens	652 @ 3000K
Input Voltage	120V
Input Frequency	50/60 Hz
Input Power	8.7W
Input Current	0.074mA (Per input power)
Power Factor	>0.90
THD	<20%
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (Consumer)
Sound Rating	Class A
Minimum Starting Temp	-30°C (-22°F)

UP TO

\$394^A

SAVINGS

^A Savings are over the life of the HALO RL4-DM luminaire.
Energy savings: \$306
Replacement lamp savings: \$88
Savings based on \$0.128 per kilowatt hour, average six hours use per day, 70,000 hours of lamp usage, and 60W PAR16 lamp lumen equivalent.

RL6 SeleCCTable Direct Mount Series



- 600 Series: up to 719 lumens @3000K¹
- 600 Series: use to replace 65W BR30 or 50W PAR30 lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT² all in one
- 90 CRI
- 600 Series: 8.7W, 120V
- L70 @ 70,000 hrs
- HALO matte white finish
- Requires no housing or junction box
- Aluminum jbox IC rated
- Aluminum jbox includes (2) 1/2" conduit pry-out & (2) Slide-N-Side
- Can be installed in 1/2" to 1-1/4" thick ceilings
- Dimmable to 5% with select dimmers
- Damp and wet location listed (shower rated)
- AIR-TITE™ certified per ASTM-E283
- Diffusing, regressed lens
- Five-year limited warranty

1. Lumens per selected CCT
2. CCT - Correlated Color Temperature

Ordering Information

SAMPLE NUMBER: RL6069S1EWHDM

Models	Lumens	CRI / CCT
RL6 = 6-Inch all-purpose retrofit LED module	06=600 lumen (nominal)	9S=90 CRI minimum, white tuning, selectable 2700, 3000, 3500, 4000 or 5000K CCT
Driver	Finish	Mounting
1E= 120V 60Hz, LE & TE phase cut 5% dimming	WH= matte white flange	DM= Direct Mount




Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



UP TO
\$399^A
SAVINGS

^A Savings are over the life of the HALO RL6-DM luminaire. Energy savings: \$338
Replacement lamp savings: \$61
Savings based on \$0.128 per kilowatt hour, average six hours use per day, 70,000 hours of lamp usage, and 65W BR30 lamp lumen equivalent.

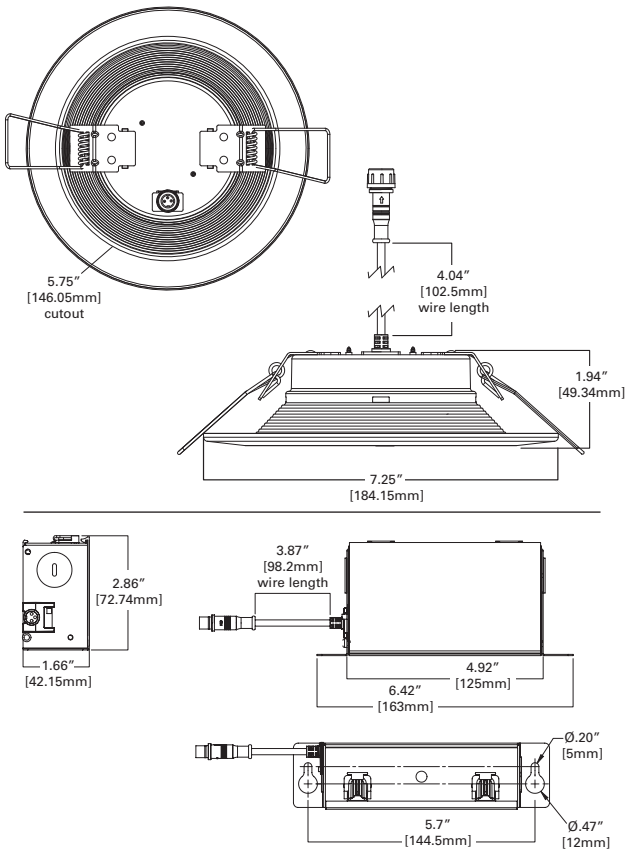

RL6-DM Energy Data	600 Series
Max. Lumens	719 @ 3000K
Input Voltage	120V
Input Frequency	50/60 Hz
Input Power	8.7W
Input Current	0.074mA (Per input power)
Power Factor	>0.90
THD	<20%
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (Consumer)
Sound Rating	Class A
Minimum Starting Temp	-30°C (-22°F)

RA4 SeleCCTable Direct Mount Series



- 600 Series: up to 789 lumens¹
- Use to replace 65W BR30 lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT² all in one
- 90 CRI
- 600 Series: 8.4W, 120V
- L70 @ 70,000 hrs
- HALO matte white finish
- Requires no housing or junction box
- Aluminum jbox IC rated
- Aluminum jbox includes (2) 1/2" conduit pry-out & (2) Slide-N-Side
- Can be installed in 3/8" to 1-1/4" thick ceilings
- Dimmable to 5% with 120V dimmers
- Damp and wet location listed (shower rated)
- Rated for IC, ICAT and may be used in Non-IC housings
- AIR-TITE™ certified per ASTM-E283
- Diffusing, regressed lens
- Five-year limited warranty

1. Lumens per selected CCT
2. CCT - Correlated Color Temperature

Ordering Information

SAMPLE NUMBER: RA4069S1EWHDMR			
Models	Lumens	CRI / CCT	
RA4 = 4-Inch all-purpose LED Adjustable Gimbal	06=600 lumen (nominal)	9S=90 CRI minimum, white tuning, selectable 2700, 3000, 3500, 4000 or 5000K CCT	
Driver	Finish	Mounting	Packaging
1E= 120V 60Hz, LE & TE phase cut 5% dimming	WH= matte white flange	DM= Direct Mount	R= Recyclable 4-color unit carton suitable for point of purchase merchandising display






Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



UP TO \$424^A SAVINGS

^A Savings are over the life of the HALO RA4-DM luminaire. Energy savings: \$319 Replacement lamp savings: \$105 Savings based on \$0.128 per kilowatt hour, average six hours use per day, 70,000 hours of lamp usage, and 65W BR30 lamp lumen equivalent.

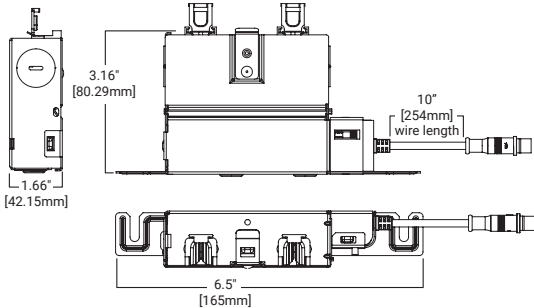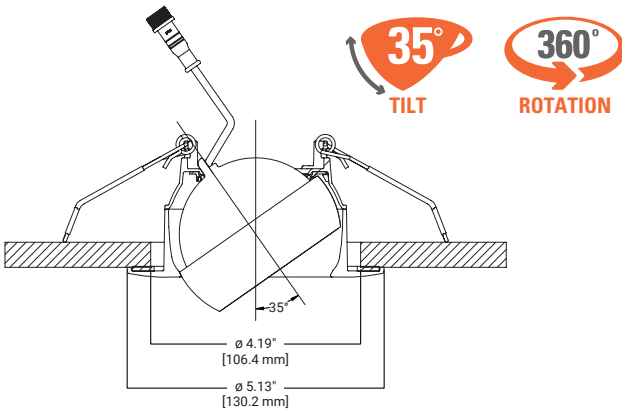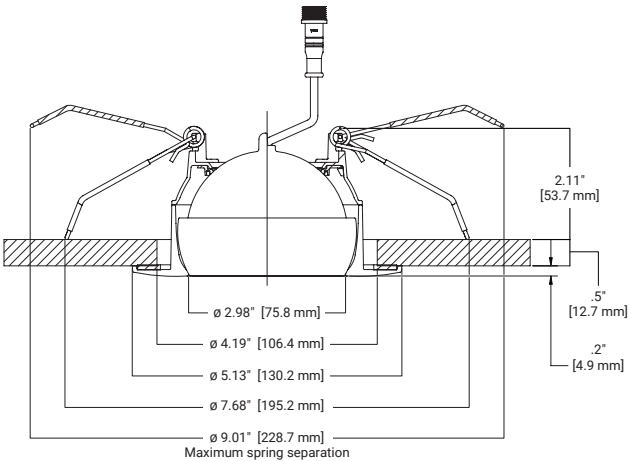

RL4-DM Energy Data	600 Series
Max. Lumens	789 @ 3000K
Input Voltage	120V
Input Frequency	50/60 Hz
Input Power	8.7W
Input Current	0.074mA (Per input power)
Power Factor	>0.90
THD	<20%
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (Consumer)
Sound Rating	Class A
Minimum Starting Temp	-30°C (-22°F)

RA6 SeleCCTable Direct Mount Series



- 600 Series: up to 778 lumens¹
- Use to replace 65W BR30 lamp
- 2700K, 3000K, 3500K, 4000K, 5000K CCT² all in one
- 90 CRI
- 600 Series: 8.5W, 120V
- L70 @ 70,000 hrs
- HALO matte white finish
- Requires no housing or junction box
- Aluminum jbox IC rated
- Aluminum jbox includes (2) 1/2" conduit pry-out & (2) Slide-N-Side
- Can be installed in 3/8" to 1-1/4" thick ceilings
- Dimmable to 5% with 120V dimmers
- Damp and wet location listed (shower rated)
- Rated for IC, ICAT and may be used in Non-IC housings
- AIR-TITE™ certified per ASTM-E283
- Diffusing, regressed lens
- Five-year limited warranty

1. Lumens per selected CCT
2. CCT - Correlated Color Temperature

Ordering Information

SAMPLE NUMBER: RA6069S1EWHDMR




Models	Lumens	CRI / CCT	
RA6 = 6-Inch all-purpose LED Adjustable Gimbal	06=600 lumen (nominal)	9S=90 CRI minimum, white tuning, selectable 2700, 3000, 3500, 4000 or 5000K CCT	
Driver	Finish	Mounting	Packaging
1E= 120V 60Hz, LE & TE phase cut 5% dimming	WH= matte white flange	DM= Direct Mount	R= Recyclable 4-color unit carton suitable for point of purchase merchandising display



Refer to ENERGY STAR® Certified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8.



¹ Savings are over the life of the HALO RA6-DM luminaire. Energy savings: \$319 Replacement lamp savings: \$105 Savings based on \$0.128 per kilowatt hour, average six hours use per day, 70,000 hours of lamp usage, and 65W BR30 lamp lumen equivalent.

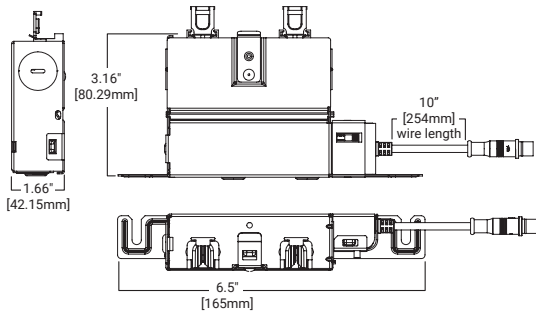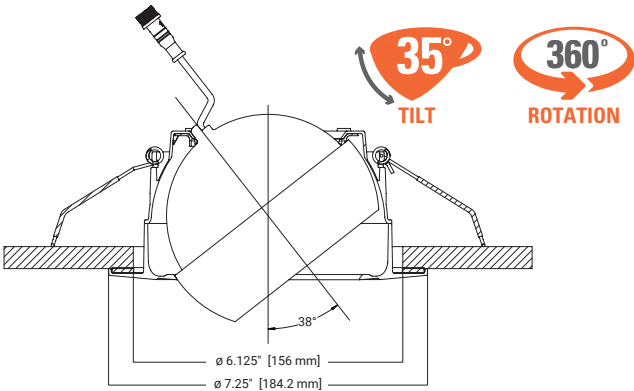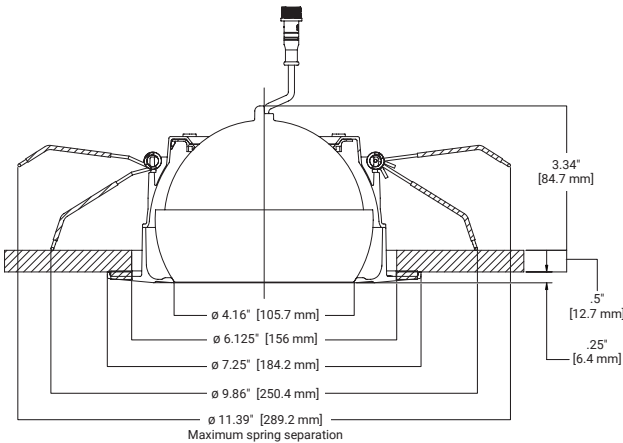

RA6-DM Energy Data	600 Series
Max. Lumens	778 @ 3000K
Input Voltage	120V
Input Frequency	50/60 Hz
Input Power	8.5 W
Input Current	71.8 mA (Per input power)
Power Factor	>0.90
THD	<20%
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (Consumer)
Sound Rating	Class A
Minimum Starting Temp	-30°C (-22°F)

Accessories


Extension cables




Dedicated driver / junction box
HLB06EC - 6 ft. extension cable
HLB12EC - 12 ft. extension cable
HLB20EC - 20 ft. extension cable

SeleCCTable driver / junction box
HLB06FSEC - 6 ft. extension cable
HLB12FSEC - 12 ft. extension cable
HLB20FSEC - 20 ft. extension cable


Mounting Frames




HL4RSMF - 4" round and square mounting frame



HL6RSMF - 6" round and square mounting frame



During electrical rough-in, the HLB driver / junction box attaches to the mounting frame with captive fasteners meeting code requirements for attachment to the building structure.

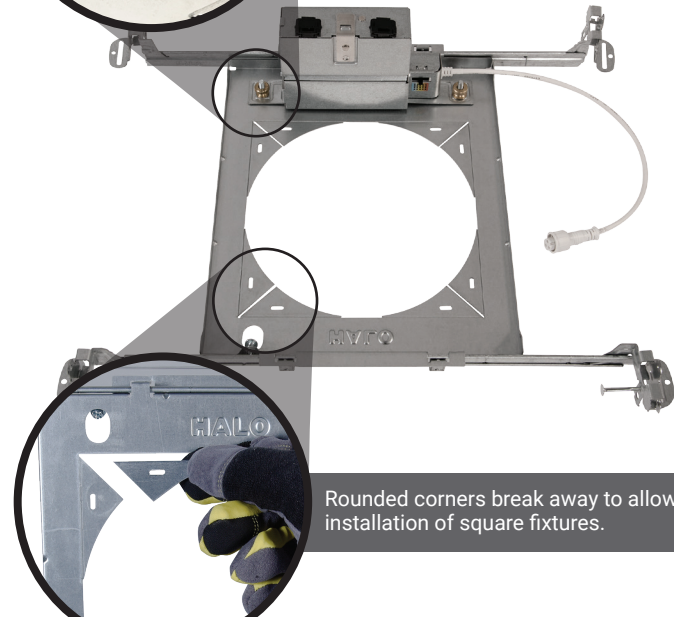

Rounded corners break away to allow installation of square fixtures.

Lighting Control Solution

Cooper Lighting Solutions dimmers offer versatile options to set the mood and reduce energy consumption. These compatible LED dimmers are ideal for both residential and light commercial applications and are compatible with decorator (screw-less) style devices and wallplates. Refer to www.cooperlighting.com for additional information.



Decorator
WBSD-DEC-*



Slide
WBSD-SLD-*



Toggle
WBSD-TOG-*



Smart
WBSD-SMT-*

HALOHOME





HALO Home In-wall Smart Dimmer

HIWMA1BLE40AWH

Controls standard lighting fixtures with dimmer or HALO Home mobile app.

Features include:

- ON/OFF
- Dim
- Group
- Scene
- Schedule

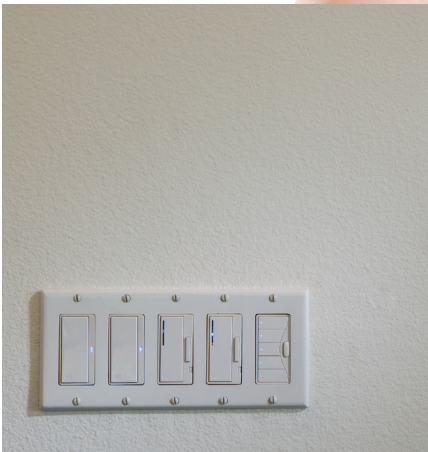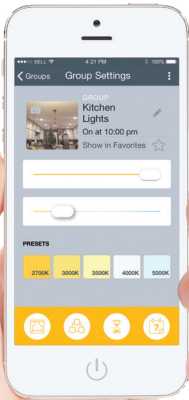


RL4069S1EWHDM

RL4 SeleCCTable Direct Mount

	CCT	Lumens	Power (W)	LPW
RL4-DM	2700K	629.3	8.7	72.3
	3000K	652.0	8.7	74.9
	3500K	670.8	8.7	77.1
	4000K	685.1	8.7	78.7
	5000K	692.7	8.7	79.6

RL4069S1EWHDM-3000K		
Luminaire lumens		652
Input watts		8.7
LER (LPW)		74.9
Spacing Criteria	0-180	1.18
	90-270	1.18
	Diagonal	1.26
Beam angle (degrees)		93.1
Field angle (degrees)		141.1
Zonal lumen	Lumens	% Lumens
0-30	230.2	35.3
0-40	365.1	56
0-60	579.0	88.8
0-90	652.0	100

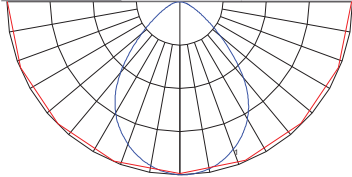

Color Metric Summary-3000K	
TM-30-15	Rf = 90.8
	Rg = 99.7
CRI/CIE	Ra = 93.7
	R9 = 69.3

CCT - Range of 2700K- 5000K
warm cool




RL6069S1EWHDM

RL6 SeleCCTable Direct Mount

	CCT	Lumens	Power (W)	LPW
RL6-DM	2700K	709.6	8.4	84.5
	3000K	735.2	8.4	87.5
	3500K	756.4	8.4	90.0
	4000K	772.5	8.4	92.0
	5000K	781.1	8.4	93.0

RL6069S1EWHDM-3000K		
Luminaire lumens		735.2
Input watts		8.4
LER (LPW)		87.5
Spacing Criteria	0-180	1.16
	90-270	1.16
	Diagonal	1.22
Beam angle (degrees)		89.1
Field angle (degrees)		140.1
Zonal lumen	Lumens	% Lumens
0-30	269.1	36.6
0-40	423.5	57.6
0-60	655.1	89.1
0-90	735.2	100

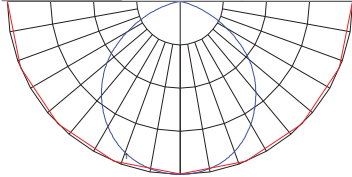

Color Metric Summary-3000K	
TM-30-15	Rf = 90.8
	Rg = 99.7
CRI/CIE	Ra = 93.7
	R9 = 69.3

CCT - Range of 2700K- 5000K
warm cool




RA4069S1EWHMDMR

RA4 SeleCCTable Direct Mount

	CCT	Lumens	Power (W)	LPW
RA4-DM	2700K	779	8.2	94.5
	3000K	789	8.3	95.4
	3500K	800	8.3	96.3
	4000K	809	8.3	97
	5000K	815	8.4	97

RA4069S1EWHMDMR-3000K		
Luminaire lumens		789
Input watts		8.3
LER (LPW)		95.4
Spacing Criteria	0-180	1.1
	90-270	1.1
	Diagonal	1.16
Beam angle (degrees)		81.1
Field angle (degrees)		140.6
Zonal lumen	Lumens	% Lumens
0-30	303.8	38.5
0-40	463.9	58.8
0-60	692.4	87.8
0-90	788.4	100

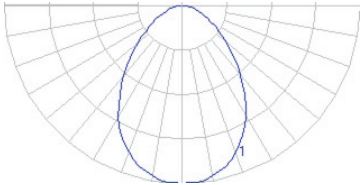

Color Metric Summary-3000K	
TM-30-15	Rf = 91
	Rg = 98
CRI/CIE	Ra = 92
	R9 = 54

CCT - Range of 2700K- 5000K
warm cool




RA6069S1EWHMDMR

RA6 SeleCCTable Direct Mount

	CCT	Lumens	Power (W)	LPW
RA6-DM	2700K	768	8.3	92.9
	3000K	778	8.3	93.6
	3500K	789	8.3	94.6
	4000K	799	8.4	95.5
	5000K	809	8.4	96.1

RA6069S1EWHMDMR-3000K		
Luminaire lumens		778
Input watts		8.3
LER (LPW)		93.6
Spacing Criteria	0-180	1.12
	90-270	1.12
	Diagonal	1.18
Beam angle (degrees)		85
Field angle (degrees)		146
Zonal lumen	Lumens	% Lumens
0-30	279.2	35.9
0-40	432.4	55.6
0-60	669.6	86.1
0-90	777.7	100

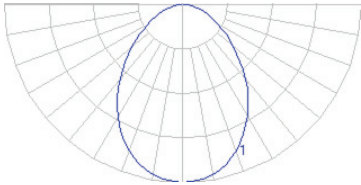

Color Metric Summary-3000K	
TM-30-15	Rf = 91
	Rg = 97
CRI/CIE	Ra = 92
	R9 = 56

CCT - Range of 2700K- 5000K
warm cool



Cooper Lighting Solutions

1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales

5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

Our Lighting Product Lines

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
io
IRiS
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
RSA
Shaper
Streetworks
Sure-Lites

Our Controls Product Lines

Fifth Light Technology
Greengate
iLight (International Only)
iLumin
Zero 88

Connected Lighting Systems

Distributed Low-Voltage Power
HALO Home
iLumin Plus
LumaWatt Pro
WaveLinX

© 2020 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. BR518078EN
February 2020

Products, specifications and
compliances are subject to
change without notice.

Cooper Lighting Solutions is a
registered trademark.
All other trademarks are property
of their respective owners.

