


**30 Amp, 125, 250 Volts and 277 Volts AC  
2 Pole, 3 Wire, Grounding**



30A 125V NEMA L5-30R 2 HP	30A 250V NEMA L6-30R 2 HP	30A 277V AC NEMA L7-30R 3 HP
---------------------------------	---------------------------------	------------------------------------

## Connector Bodies

### Watertight Safety-Shroud®

Description	Cord Dia.	IP66 SUITABILITY	UL Type 4x, 12
Black Valox® housing, white Valox® clamps.	.360"-.930" (9-24)	<b>HBL2613SW</b>	<b>HBL2623SW</b> -
Reverse service, black Valox® housing, white Valox® clamps (use with HBL2615SWR), (Not shown).	.360"-.930" (9-24)	<b>HBL2613SR</b>	- -

### Insulgrip®

Description	Cord Dia.	IP20 SUITABILITY
Black and white nylon.	.360"-.930" (9-24)	<b>HBL2613</b> <b>HBL2623</b> <b>HBL2633</b>
Black and white nylon, spring termination	.360"-.930" (9-24)	<b>HBL2613ST</b> <b>HBL2623ST</b> -
Spring termination, all black		<b>HBL2613STBK</b> <b>HBL2623STBK</b> -
Heat stabilized, gray nylon, 220° F (104° C).	.360"-.930" (9-24)	<b>HBL2613F</b> <b>HBL2623F</b> -
Corrosion resistant, yellow nylon.	.360"-.930" (9-24)	<b>HBL26CM13</b> <b>HBL26CM23</b> -
All black nylon.	.360"-.930" (9-24)	<b>HBL2613BK</b> <b>HBL2623BK</b> -

Note: See page B-52 for accessories.

### Valise®

Description	Cord Dia.	IP20 SUITABILITY
Yellow nylon.	.590"-.930" (15.0-23.6)	<b>HBL2613VY</b> <b>HBL2623VY</b> -
Corrosion resistant, yellow nylon.	.590"-.930" (15.0-23.6)	<b>HBL26CM13V</b> -   -
Black nylon.	.590"-.930" (15.0-23.6)	<b>HBL2613VBK</b> <b>HBL2623VBK</b> -
Cord clamps with removable inserts. All black nylon.	.360"-.930" (9-24)	- <b>HBL2623EBK</b> -

Note: See page B-53 for accessories.

## Receptacles

### Watertight Safety-Shroud®

Description	IP66 SUITABILITY	UL Type 4x, 12
Gray Valox® housing and flange, back wired.	<b>HBL2610SW</b>	<b>HBL2620SW</b> -

Note: See page B-54 for accessories.

### Safety-Shroud® Twist-Lock®

Description	IP20 SUITABILITY
Gray Valox® angle housing, one gang, back wired.	<b>HBL2610AR</b> <b>HBL2620AR</b> -
Gray Valox® surface mounting, one gang, back wired.	<b>HBL2610SR</b> <b>HBL2620SR</b> -
Gray Valox® semi-flush, two gang, back wired.	<b>HBL2610SR2</b> <b>HBL2620SR2</b> -

### Single Flush Receptacles

Description	IP20 SUITABILITY
Black nylon face, back and side wired.	<b>HBL2610</b> <b>HBL2620</b> <b>HBL2630</b>
Black nylon face, spring terminals.	<b>HBL2610ST</b> <b>HBL2620ST</b> -
Blue nylon face, back and side wired.	<b>HBL2610M6</b> <b>HBL2620M6</b> -
Isolated ground, orange nylon face, back and side wired.	<b>IG2610</b> <b>IG2620</b> -
Isolated ground, orange nylon face, spring termination	<b>IG2610ST</b> <b>IG2620ST</b> -
Corrosion resistant, yellow nylon face, back and side wired.	<b>HBL26CM10</b> <b>HBL26CM20</b> -
Ring terminal connection.	<b>HBL2610RT</b> <b>HBL2620RT</b> -


Note: See page B-52 for accessories.

### Insulgrip® Flanged Receptacles

Description	IP20 SUITABILITY
Nylon casing, back wired.	<b>HBL2616</b> <b>HBL2626</b> <b>HBL2636</b>
Nylon casing, back wire, spring termination	<b>HBL2616ST</b> <b>HBL2626ST</b> -
Heat stabilized, gray nylon, 220° F (104° C).	<b>HBL2616F</b> <b>HBL2626F</b> -

Note: See page B-52 for accessories.

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.

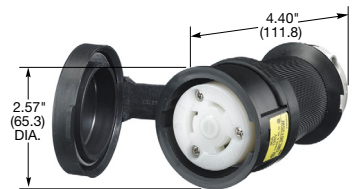


**HBL2613SW**




**HBL2623**




**HBL2613ST**



**HBL2613VY**



**HBL2610SW**



**HBL2610ST**



**HBL2620SR**

Dimensions in Inches (mm)