



LBR Series


Retrofit & Remodel Downlight

- Switchable CCTs and lumens
- Aperture sizes including 4", 6", 8", and 10"
- Glare control with deep source regression
- Up to 114 LPW
- Available with battery pack, IOTA emergency transfer system (ETS), 347V step-down transformer and optional wet location (IP55) listed
- nLight® wired or wireless lighting controls and SensorSwitch™ JOT single room controls
- 10% and 1% dimming, MVOLT 120-277V, 0-10V and phase dimming in an all-in-one driver or a separate DALI driver




Make the Switch to LBR

Switchable CCTs & Lumens

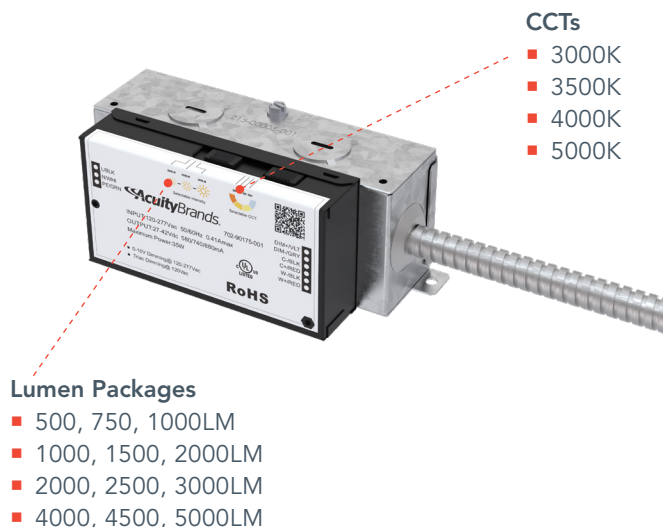

Deep Source Regression

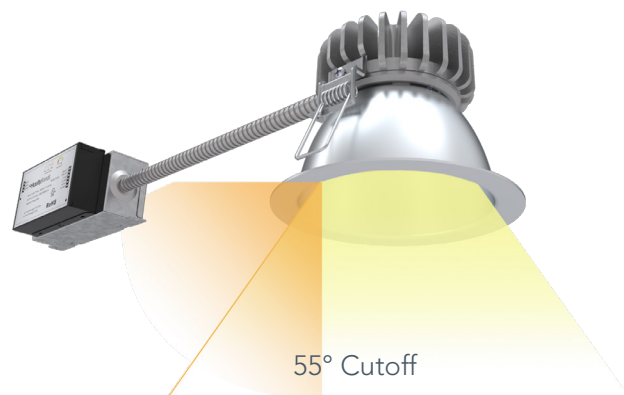

Options



Start Saving



Energy Savings

Reduce between 50-80% energy consumption compared to traditional sources



Low Labor Costs

Minimum install and cleanup time



Environmental Impact

Last up to 25 times longer than traditional sources



Lighting Controls

sensorswitch

SensorSwitch™ JOT is a wireless, app free solution for single room controls

nLIGHT

The nLight® platform offers wired or wireless networked lighting control solutions