

Hospital and Specification Grade Straight Blade Receptacles

SELECTION GUIDE



Straight Blade Receptacles Overview

Choose from among the broadest offering of safe and reliable receptacle outlets in the industry, with devices to suit your every need or function.

SYMBOLS TO SIMPLIFY BROWSING



Tamper-Resistant



Isolated Ground



Power Indication



Weather-Resistant



Corrosion-Resistant



Audible Alarm



Single Receptacle



Plug Load Control

Code Compliant Solutions

CONVENTIONAL DEVICES BEGIN ON PAGE 6

TAMPER-RESISTANT RECEPTACLES

Safety shutters prevent unintended contact with live parts as specified by the National Electrical Code®.



ISOLATED GROUND RECEPTACLES

Provides a more reliable, noise-free equipment ground path to sensitive electrical equipment.



POWER INDICATION RECEPTACLES

Provides visual indication of power present at the receptacle; ideal for emergency circuit applications.



WEATHER-RESISTANT RECEPTACLES

Designed for wet or damp locations, these receptacles provide added protection against corrosion, UV degradation, and cold impact damage.



Time Savings


PAGES 16-29

LEV-LOK® RECEPTACLES

The revolutionary modular wiring system that streamlines device installation and commissioning of the electrical system.

RECEPTACLES WITH PRE-WIRED LEADS

Receptacles are pre-wired with stranded #12 AWG leads to speed installation.

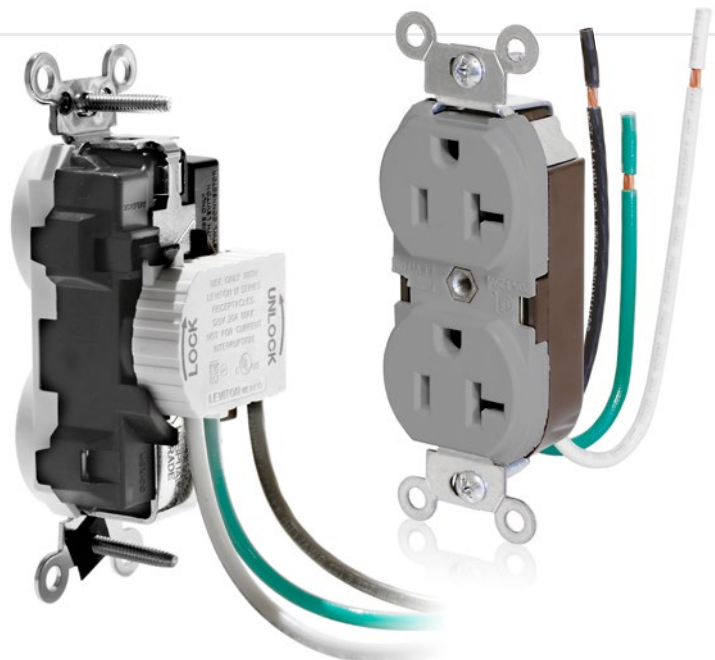

Protection

PAGES 30-36

SMARTLOCKPRO® GFCI AND AFCI RECEPTACLES

Combines the safety of our industry-leading personnel protection with robust construction for extra heavy-duty applications.

SURGE PROTECTIVE RECEPTACLES

Provides point-of-use surge protection for sensitive electronic devices, such as monitors, projectors, computers, etc.



Plug Load Control

PAGES 37-38

MARKED CONTROLLED RECEPTACLES

Identifies receptacles that will automatically be de-energized as part of an overall plug load control program.

Specialty

PAGES 39-41

4-IN-1™ RECEPTACLES

USB RECEPTACLES

CLOCK HANGERS & DISPLAY RECEPTACLES

SHORT STRAP RECEPTACLES

EUROPLUG/UNIVERSAL RECEPTACLES



A receptacle for every application

HOSPITAL GRADE

UL construction and performance requirements for Hospital Grade receptacles are more stringent than those for specification grade devices. Leviton Hospital Grade receptacles meet or exceed these requirements. These receptacles are Fed Spec W-C-596 rated.*



INDUSTRIAL SPECIFICATION GRADE

For demanding applications requiring robust construction and exceptional electrical performance, Leviton industrial specification grade receptacles are the ideal solution. These receptacles are Fed Spec W-C-596 rated.*



* See website for product specifications.

leviton.com/receptaclegades

COMMERCIAL SPECIFICATION GRADE

Leviton commercial specification grade receptacles strike the perfect balance between performance and value. These heavy-duty receptacles are the most widely specified for commercial building projects.



HOSPITAL GRADE Extra Heavy-Duty

- Single-piece wraparound nickel-plated brass strap
- Integral ground contacts
- Extra heavy-duty high-performance brass electrical contacts



HOSPITAL GRADE & INDUSTRIAL SPECIFICATION GRADE Heavy-Duty

- Single-piece heavy-duty wraparound galvanized steel strap
- Brass ground contacts
- Heavy-duty copper alloy electrical contacts



COMMERCIAL SPECIFICATION GRADE

- Single-piece wraparound galvanized steel strap
- Brass ground contacts
- Heavy-duty copper alloy electrical contacts



Conventional Receptacles

HOSPITAL GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

		Color	15 Amp		20 Amp	
			15 Amp		20 Amp	
STANDARD	- Duplex Receptacle - Smooth Face - Back and Side Wire	Brown	8200		8300	
		Ivory	8200-I		8300-I	
		Blue	8200-BU		8300-BU	
		Black	—		8300-E	
		Gray	8200-GY		8300-GY	
		Red	8200-R		8300-R	
		Lt Almond	8200-T		8300-T	
		White	8200-W		8300-W	
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire 	Brown	8200-SG		8300-SG	
		Gray	8200-SGG		8300-SGG	
		Ivory	8200-SGI		8300-SGI	
		Red	8200-SGR		8300-SGR	
		Lt Almond	—		8300-SGT	
		White	8200-SGW		8300-SGW	
	- Duplex Receptacle - Smooth Face - Power Indication LED - Back and Side Wire 	Brown	—		8300-PL	
		Gray	—		8300-PLG	
		Ivory	8200-PLI		8300-PLI	
		Orange	—		8300-PLO	
		Red	8200-PLR		8300-PLR	
		White	8200-PLW		8300-PLW	
	- Duplex Receptacle - Smooth Face - MRI - Back and Side Wire	Gray	MRI82-GY		MRI83-GY	
		Ivory	MRI82-I		MRI83-I	
		Red	MRI82-R		MRI83-R	
		Lt Almond	MRI82-T		MRI83-T	
		White	MRI82-W		MRI83-W	
DECORA PLUS™	- Duplex Receptacle - Smooth Face - Back and Side Wire	Gray	16262-HGG*		16362-HGG*	
		Ivory	16262-HGI*		16362-HGI*	
		Red	16262-HGR*		16362-HGR*	
		Lt Almond	—		16362-HGT*	
		White	16262-HGW*		16362-HGW*	
	- Duplex Receptacle - Smooth Face - Power Indication LED - Back and Side Wire 	Ivory	16262-PLI*		16362-PLI*	
		Red	16262-PLR*		16362-PLR*	
		White	16262-PLW*		16362-PLW*	
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire 	Brown	16262-SG*		—	
		Gray	—		16362-SGG*	
		Ivory	16262-SGI*		16362-SGI*	
		Red	16262-SGR*		16362-SGR*	
		Lt Almond	16262-SGT*		16362-SGT*	
		White	16262-SGW*		16362-SGW*	

* Not Fed Spec rated



8300-PLW



8200-SGG



16262-SGR

HOSPITAL GRADE Extra Heavy-Duty		NEMA 6-15R		NEMA 6-20R		250 V	
2-Pole, 3-Wire • 250 Volt		Color	15 Amp	20 Amp			
STANDARD	- Duplex Receptacle - Smooth Face - Back and Side Wire	Brown	8600	8400			
		Gray	—	8400-GY			
		Ivory	8600-I	8400-I			
		Red	—	8400-R			
		White	—	8400-W			
HOSPITAL GRADE Heavy-Duty		NEMA 5-15R		NEMA 5-20R			
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp			
STANDARD	- Single Receptacle - Smooth Face - Back and Side Wire		Brown	8210	8310		
			Gray	—	8310-GY		
			Ivory	8210-I	8310-I		
			Red	8210-R	8310-R		
			White	8210-W	8310-W		
	- Duplex Receptacle - Smooth Face - Back and Side Wire		Brown	8200-H	8300-H		
			Blue	8200-HBU	8300-HBU		
			Gray	8200-HGY	8300-HGY		
			Ivory	8200-HI	8300-HI		
			Red	8200-HR	8300-HR		
			Lt Almond	8200-HT	8300-HT		
			White	8200-HW	8300-HW		
			Yellow	8200-HY	—		
	- Duplex Receptacle - Indented Face - Back and Side Wire		Brown	C8200	C8300		
			Blue	C8200-BU	C8300-BU		
			Black	C8200-E	C8300-E		
			Gray	C8200-G	C8300-GY		
			Ivory	C8200-I	C8300-I		
			Red	C8200-R	C8300-R		
			Lt Almond	C8200-T	C8300-T		
			White	C8200-W	C8300-W		
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire		Brown	T8200	T8300		
			Blue	T8200-BU	T8300-BU		
			Black	T8200-E	T8300-E		
			Gray	T8200-GY	T8300-GY		
			Ivory	T8200-I	T8300-I		
			Red	T8200-R	T8300-R		
			Lt Almond	T8200-T	T8300-T		
			White	T8200-W	T8300-W		
	- Single Receptacle - Smooth Face - Isolated Ground - Back and Side Wire	 	Orange	8210-IG	8310-OIG		



Conventional Receptacles

HOSPITAL GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

STANDARD

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire



Orange

8200-IG

8300-OIG

Brown

8200-IGB

8300-IGB

Gray

8200-IGG

8300-IGG

Ivory

8200-IGI

8300-IGI

Red

8200-IGR

8300-IGR

White

8200-IGW

8300-IGW

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire
- Pre-wired Ground Lead



Orange

8200-LIG

8300-LIG

- Duplex Receptacle
- Smooth Face
- Illuminated Blade Slot
- Back and Side Wire



Gray

—

8300-HLG

Ivory

8200-HLI

8300-HLI

Red

8200-HLR

8300-HLR

White

8200-HLW

8300-HLW

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Tamper-Resistant
- Back and Side Wire



Orange

T8200-IG

T8300-IG

Blue

T8200-IGB

T8300-IGB

Gray

T8200-IGG

T8300-IGG

Ivory

T8200-IGI

T8300-IGI

Red

T8200-IGR

T8300-IGR

White

T8200-IGW

T8300-IGW

DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire



Orange

D8200-IG

D8300-IG

Brown

D8200-IGB

D8300-IGB

Black

D8200-IGE

D8300-IGE

Gray

D8200-IGG

D8300-IGG

Ivory

D8200-IGI

D8300-IGI

Red

D8200-IGR

D8300-IGR

Lt Almond

D8200-IGT

D8300-IGT

White

D8200-IGW

D8300-IGW

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Tamper-Resistant
- Back and Side Wire



Orange

DT820-IG

DT830-IG

Brown

DT820-IGB

DT830-IGB

Gray

DT820-IGG

DT830-IGG

Ivory

DT820-IGI

DT830-IGI

Red

DT820-IGR

DT830-IGR

White

DT820-IGW

DT830-IGW

INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

STANDARD

- Duplex Receptacle
- Smooth Face
- Back and Side Wire

Brown

5262

5362

Blue

—

5362-BU

Black

5262-E

5362-E

Gray

5262-GY

5362-GY

Ivory

5262-I

5362-I

Red

5262-R

5362-R

White

5262-W

5362-W



INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

STANDARD	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire	Color	15 Amp	20 Amp
		Brown	5262-SG	5362-SG
		Blue	5262-SGB	5362-SGB
		Black	5262-SGE	5362-SGE
		Gray	5262-SGG	5362-SGG
		Ivory	5262-SGI	5362-SGI
		Red	5262-SGR	5362-SGR
		Lt Almond	5262-SGT	5362-SGT
		White	5262-SGW	5362-SGW
		Yellow	52CM-62	53CM-62
STANDARD	- Duplex Receptacle - Corrosion-Resistant - Smooth Face - Back and Side Wire	Color	15 Amp	20 Amp
		Brown	5251	5351
		Ivory	5251-I	5351-I
		Black	—	5361-E
		Gray	5261-GY	5361-GY
		Ivory	5261-I	5361-I
		Red	5261-R	5361-R
		Lt Almond	—	5361-T
		White	5261-W	5361-W
STANDARD	- Duplex Receptacle - Smooth Face - Side Wire Only	Color	15 Amp	20 Amp
		Brown	5242	5342
		Black	—	5342-E
		Gray	5242-GY	5342-GY
		Ivory	5242-I	5342-I
		Red	5242-R	5342-R
		White	5242-W	5342-W
		Brown	5252	5352
		Blue	5252-BU	5352-BU
		Black	5252-E	5352-E
		Gray	5252-GY	5352-GY
		Ivory	5252-I	5352-I
		Red	5252-R	5352-R
		Lt Almond	5252-T	5352-T
		White	5252-W	5352-W
STANDARD	- Duplex Receptacle - Smooth Face - Back and Side Wire	Color	15 Amp	20 Amp
		Brown	5262-S	5362-S
		Blue	5262-SBU	5362-SBU
		Black	5262-SE	5362-SE
		Gray	5262-GYS	5362-GYS
		Ivory	5262-SI	5362-SI
		Red	5262-SR	5362-SR
		Orange	—	5362-SO
		Lt Almond	5262-ST	5362-ST
		White	5262-SW	5362-SW



5362-SGW



5352-W



5361-W

Conventional Receptacles

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- Indented Face
- Back and Side Wire

Brown

C5262

C5362

Blue

C5262-BU

C5362-BU

Black

C5262-E

C5362-E

Gray

C5262-GY

C5362-GY

Ivory

C5262-I

C5362-I

Red

C5262-R

C5362-R

Lt Almond

C5262-T

C5362-T

White

C5262-W

C5362-W



C5362-W

- Duplex Receptacle
- Indented Face
- Back and Side Wire
- Single Piece Ground Shunt

Brown

L5262

L5362

Blue

L5262-BU

L5362-BU

Black

L5262-E

L5362-E

Gray

L5262-GY

L5362-GY

Ivory

L5262-I

L5362-I

Red

L5262-R

L5362-R

Lt Almond

L5262-T

L5362-T

White

L5262-W

L5362-W



L5362-I

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Back and Side Wire



Brown

T5262

T5362

Blue

T5262-BU

T5362-BU

Black

T5262-E

T5362-E

Gray

T5262-GY

T5362-GY

Ivory

T5262-I

T5362-I

Red

T5262-R

T5362-R

Lt Almond

T5262-T

T5362-T

White

T5262-W

T5362-W

STANDARD

- Single Receptacle
- Smooth Face
- Corrosion-Resistant
- Back and Side Wire



Yellow

5261-CR

5361-CR

- Single Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire



Orange

5261-IG

5361-IG

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire



Orange

5262-IG

5362-IG

Brown

5262-IGB

5362-IGB

Blue

—

5362-BIG

Black

5262-IGE

5362-IGE

Gray

5262-IGG

5362-IGG

Ivory

5262-IGI

5362-IGI

Red

5262-IGR

5362-IGR

Lt Almond

—

5362-IGT

White

5262-IGW

5362-IGW

- Single Receptacle
- Smooth Face
- Weather-Resistant
- Back and Side Wire



Brown

W5261

W5361

Black

W5261-E

W5361-E

Gray

W5261-GY

W5361-GY

Ivory

W5261-I

W5361-I

Red

W5261-R

W5361-R

Lt Almond

W5261-T

W5361-T

White

W5261-W

W5361-W

Yellow

W5261-Y

W5361-Y



5361-CR

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty



2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
STANDARD	- Duplex Receptacle - Indented Face - Weather-Resistant - Back and Side Wire	Blue	—	WBR20-BU
		Black	—	WBR20-E
		Gray	—	WBR20-GY
		Ivory	—	WBR20-I
		Red	—	WBR20-R
		White	WBR15-W	WBR20-W
		Yellow	WBR15-Y	WBR20-Y
	- Duplex Receptacle - Smooth Face - Isolated Ground - Tamper-Resistant - Back and Side Wire	Orange	T5262-IG	T5362-IG
		Blue	T5262-IGB	T5362-IGB
		Gray	T5262-IGG	T5362-IGG
		Ivory	T5262-IGI	T5362-IGI
		Red	T5262-IGR	T5362-IGR
		White	T5262-IGW	T5362-IGW
		Gray	TWR15-GY	TWR20-GY
		Ivory	—	TWR20-I
	- Duplex Receptacle - Smooth Face - Weather-Resistant - Tamper-Resistant - Back and Side Wire	White	TWR15-W	TWR20-W
		Yellow	—	TWR20-Y
	- Duplex Receptacle - Smooth Face - Back and Side Wire	Brown	16262*	16362*
		Black	16262-E*	16362-E*
		Gray	16262-GY*	16362-GY*
		Ivory	16262-I*	16362-I*
		White	16262-W*	16362-W*
		Brown	16242	16342
DECORA PLUS™	- Duplex Receptacle - Smooth Face - Side Wire Only	Black	16242-E	16342-E
		Gray	—	16342-GY
		Ivory	16242-I	16342-I
		Lt Almond	—	16342-T
		White	16242-W	16342-W
		Brown	16252	16352
	- Duplex Receptacle - Smooth Face - Back and Side Wire	Blue	16252-BU	16352-BU
		Black	16252-E	16352-E
		Gray	16252-GY	16352-GY
		Ivory	16252-I	16352-I
		Red	16252-R	16352-R
		Lt Almond	16252-T	16352-T
		White	16252-W	16352-W
		White	—	16351-SGW
	- Single Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire	White	—	16351-SGW

* Not Fed Spec rated



WBR20-Y



T5362-IGW



TWR20-I

Conventional Receptacles

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty

2-Pole, 3-Wire • 125 Volt

NEMA
5-15R



NEMA
5-20R



15 Amp

20 Amp

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Back and Side Wire

Color

Brown

TDR15

TDR20

Blue

TDR15-BU

—

Black

TDR15-E

TDR20-E

Gray

TDR15-GY

TDR20-GY

Ivory

TDR15-I

TDR20-I

Red

TDR15-R

—

Lt Almond

TDR15-T

TDR20-T

White

TDR15-W

TDR20-W



- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire

Blue

16262-BIG

16362-BIG

Black

16262-EIG

16362-EIG

Gray

16262-GIG

16362-GIG

Ivory

16262-IIG

16362-IIG

Orange

16262-OIG

16362-OIG

Red

16262-RIG

16362-RIG

Lt Almond

16262-TIG

16362-TIG

White

16262-WIG

16362-WIG



- Duplex Receptacle
- Smooth Face
- Weather-Resistant
- Back and Side Wire

Brown

WDR15

WDR20

Black

WDR15-E

WDR20-E

Gray

WDR15-GY

WDR20-G

Ivory

WDR15-I

WDR20-I

White

WDR15-W

WDR20-W



- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Weather-Resistant
- Back and Side Wire

Black

WTD15-E

WTD20-E

Gray

WTD15-GY

WTD20-GY

White

WTD15-W

WTD20-W



- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Tamper-Resistant
- Back and Side Wire

Orange

T1626-IG

T1636-IG

Blue

T1626-IGB

T1636-IGB

Gray

T1626-IGG

T1636-IGG

Ivory

T1626-IGI

T1636-IGI

Red

T1626-IGR

T1636-IGR

White

T1626-IGW

T1636-IGW



INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty

2-Pole, 3-Wire • 125 and 250 Volt

NEMA
5-15R



NEMA
6-15R



15 Amp

COMBO

- Duplex Receptacle
- Smooth Face
- Side Wire Only

Color

Brown

5292

Ivory

5292-I

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty

2-Pole, 3-Wire • 250 Volt

NEMA
6-15R



NEMA
6-20R



15 Amp

20 Amp

250 V

- Single Receptacle
- Smooth Face
- Side Wire Only

Color

Brown

5651

—

Ivory

5651-I

—

White

5651-W

—



WDR20-W



T1636-IGG



5292-I

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty		NEMA 6-15R	NEMA 6-20R	250 V
2-Pole, 3-Wire • 250 Volt		15 Amp	20 Amp	
- Single Receptacle - Smooth Face - Back and Side Wire		Brown	5661	5461
		Black	5661-E	—
		Gray	—	5461-GY
		Ivory	5661-I	5461-I
		Red	—	5461-R
		Lt Almond	—	5461-T
		White	5661-W	5461-W
- Duplex Receptacle - Smooth Face - Back and Side Wire		Brown	5662	5462
		Gray	—	5462-GY
		Ivory	5662-I	5462-I
		White	—	5462-W
- Single Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire		Brown	T5661	T5461
		Black	T5661-E	T5461-E
		Gray	T5661-GY	T5461-GY
		Ivory	T5661-I	T5461-I
		Lt Almond	T5661-T	T5461-T
		White	T5661-W	T5461-W
- Single Receptacle - Smooth Face - Isolated Ground - Back and Side Wire - Pre-wired Ground Lead		Orange	5661-IG	5461-IG
- Duplex Receptacle - Smooth Face - Isolated Ground - Back and Side Wire		Orange	5662-IG	5462-IG
- Single Receptacle - Smooth Face - Corrosion-Resistant - Back and Side Wire		Yellow	5661-CR	5461-CR
- Single Receptacle - Smooth Face - Weather-Resistant - Back and Side Wire		Brown	W5661	W5461
		Black	W5661-E	W5461-E
		Gray	W5661-GY	W5461-GY
		Ivory	W5661-I	W5461-I
		Lt Almond	W5661-T	W5461-T
		White	W5661-W	W5461-W
		Yellow	W5661-Y	W5461-Y
- Single Receptacle - Smooth Face - Weather- and Tamper-Resistant - Back and Side Wire		Brown	W5661-T00	W5461-T00
		Black	W5661-T0E	W5461-T0E
		Gray	W5661-TGY	W5461-TGY
		Ivory	W5661-T0I	W5461-T0I
		Lt Almond	W5661-T0T	W5461-T0T
		White	W5661-T0W	W5461-T0W
		Yellow	W5661-T0Y	W5461-T0Y



Conventional Receptacles

COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
STANDARD	- Single Receptacle - Indented Face - Side Wire Only 	Brown	5015	5801
		Ivory	5015-I	5801-I
		Lt Almond	5015-T	5801-T
		White	5015-W	5801-W
	- Single Receptacle - Indented Face - Back and Side Wire 	Brown	5088	5891
		Ivory	5088-I	—
		Lt Almond	5088-T	—
		White	—	5891-W
	- Duplex Receptacle - Smooth Face - Side Wire Only	Brown	CR015	CR020
		Black	CR015-E	CR020-E
		Gray	CR015-GY	CR020-GY
		Ivory	CR015-I	CR020-I
		White	CR015-W	CR020-W
	- Duplex Receptacle - Indented Face - Side Wire Only	Brown	CR15	CR20
		Black	CR15-E	CR20-E
		Gray	CR15-GY	CR20-GY
		Ivory	CR15-I	CR20-I
		Orange	—	CR20-O
		Lt Almond	CR15-T	CR20-T
		White	CR15-W	CR20-W
	- Duplex Receptacle - Indented Face - Back and Side Wire	Brown	BR15	BR20
		Black	BR15-E	BR20-E
		Gray	BR15-GY	BR20-GY
		Ivory	BR15-I	BR20-I
		Lt Almond	BR15-T	BR20-T
		White	BR15-W	BR20-W
	- Single Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire - Grounding 	Brown	T5015	T5020
		Black	T5015-E	T5020-E
		Gray	T5015-GY	T5020-GY
		Ivory	T5015-I	T5020-I
		Lt Almond	T5015-T	T5020-T
		White	T5015-W	T5020-W
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire 	Brown	TBR15	TBR20
		Black	TBR15-E	TBR20-E
		Gray	TBR15-GY	TBR20-GY
		Ivory	TBR15-I	TBR20-I
		Lt Almond	TBR15-T	TBR20-T
		White	TBR15-W	TBR20-W
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Side Wire Only 	Brown	TCR15	TCR20
		Black	TCR15-E	TCR20-E
		Gray	TCR15-GY	TCR20-GY
		Ivory	TCR15-I	TCR20-I
		Lt Almond	TCR15-T	TCR20-T
		White	TCR15-W	TCR20-W
DECORA PLUS™	- Single Receptacle - Smooth Face - Back and Side Wire 	Brown	16251	16351
		Ivory	16251-I	16351-I
		White	16251-W	16351-W



COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125 Volt

DECORA PLUS™	- Single Receptacle - Smooth Face - Side Wire Only	Color	15 Amp	20 Amp
		Brown	—	16341
		Black	—	16341-E
		Gray	—	16341-GY
		Ivory	16241-I	16341-I
		Lt Almond	—	16341-T
		White	16241-W	16341-W
		White	—	16351-SGW



COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125/250 Volt

STD.	- Single Receptacle - Smooth Face - Side Wire Only	Color	20 Amp
		Brown	5032
		Ivory	5032-I



125/250 V



16292-W

COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125 and 250 Volt

STD.	- Duplex Receptacle - Indented Face - Side Wire Only	Color	15 Amp
		Brown	5031
		Ivory	5031-I
DECORA PLUS™	- Duplex Receptacle - Smooth Face - Back and Side Wire	White	5031-W
		Ivory	16292-I
		White	16292-W

COMBO



5842-I

COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125 and 250 Volt

STANDARD	- Duplex Receptacle - Indented Face - Side Wire Only	Color	20 Amp
		Brown	5842
		Ivory	5842-I
		White	5842-W
STANDARD	- Duplex Receptacle - Indented Face - Back and Side Wire	Brown	5844
		Ivory	5844-I
		White	5844-W

COMBO

COMMERCIAL SPECIFICATION GRADE



3-Pole, 4-Wire • 125/250 Volt

STD.	- Single Receptacle - Smooth Face - Back and Side Wire	Color	20 Amp
		Black	8410



125/250 V

COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 250 Volt

STANDARD	- Duplex Receptacle - Indented Face - Side Wire Only	Color	15 Amp	20 Amp
		Brown	5028	5822
		Ivory	5028-I	5822-I
		White	—	5822-W
		Brown	5029	5821
		Ivory	5029-I	5821-I
		Lt Almond	—	5821-T
		White	5029-W	5821-W



250 V



5821-W

Conventional Receptacles



COMMERCIAL SPECIFICATION GRADE			NEMA 6-15R		NEMA 6-20R		250 V
2-Pole, 3-Wire • 250 Volt			Color	15 Amp	20 Amp		
STD.	- Single Receptacle - Indented Face - Back and Side Wire		Brown	—	5823		
			Ivory	5089-I	5823-I		
DECORA PLUS™	- Single Receptacle - Smooth Face - Back and Side Wire		Ivory	16651-I	16451-I		
			White	16651-W	16451-W		
	- Duplex Receptacle - Smooth Face - Back and Side Wire		Black	—	16462-E		
			Ivory	16662-I	16462-I		
			White	16662-W	16462-W		
	- Single Receptacle - Smooth Face - Side Wire Only		Ivory	16641-I	16441-I		
			Lt Almond	—	16441-T		
			White	16641-W	16441-W		

COMMERCIAL SPECIFICATION GRADE			NEMA 7-15R			277 V
2-Pole, 3-Wire • 277 Volt			Color	15 Amp		
STD.	- Duplex Receptacle - Smooth Face - Back and Side Wire		Brown	5585		



5585

Time Savings

lev-lok® Modular Receptacles

The perfect productivity solution for electrical construction & maintenance applications.



KEY FEATURES AND BENEFITS




Future Proof

It's 5x faster to replace devices in a facility to meet future needs, whether you're updating technology or meeting new requirements.



Compress Timelines

Accelerate installation and swap outs to complete projects faster than using traditional wiring.

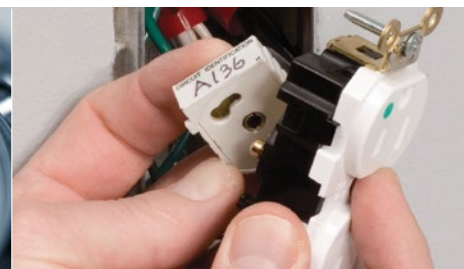

Accurate & Secure Connection

Lev-Lok® lowers the risk of incorrect installation while providing a safe and secure connection.

CALCULATE YOUR SAVINGS ONLINE: www.leviton.com/levlokcalculator

lev-lok® Modular Wiring Devices: Receptacles

HOSPITAL GRADE Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

	Color	15 Amp	20 Amp
- Duplex Receptacle - Smooth Face	Brown	M8200	M8300
	Blue	M8200-B	M8300-B
	Black	M8200-E	M8300-E
	Gray	M8200-GY	M8300-GY
	Ivory	M8200-I	M8300-I
	Red	M8200-R	M8300-R
	Lt Almond	M8200-T	M8300-T
	White	M8200-W	M8300-W
- Duplex Receptacle - Smooth Face - Tamper-Resistant	Brown	M8200-SG	M8300-SG
	Blue	M8200-SGB	M8300-SGB
	Black	M8200-SGE	M8300-SGE
	Gray	M8200-SGG	M8300-SGG
	Ivory	M8200-SGI	M8300-SGI
	Red	M8200-SGR	M8300-SGR
	Lt Almond	M8200-SGT	M8300-SGT
	White	M8200-SGW	M8300-SGW
- Duplex Receptacle - Smooth Face - MRI	Gray	MRI15-GY	MRI20-GY
	Ivory	MRI15-I	MRI20-I
	Red	MRI15-R	MRI20-R
	Lt Almond	MRI15-T	MRI20-T
	White	MRI15-W	MRI20-W
- Duplex Receptacle - Smooth Face - Power Indication LED	Gray	M8200-PLG	M8300-PLG
	Ivory	M8200-PLI	M8300-PLI
	Red	M8200-PLR	M8300-PLR
	Lt Almond	M8200-PLT	M8300-PLT
	White	M8200-PLW	M8300-PLW
- Duplex Receptacle - Smooth Face - Illuminated Blade Slot	Gray	M8200-ILG	M8300-ILG
	Ivory	M8200-ILI	M8300-ILI
	Red	M8200-ILR	M8300-ILR
	Lt Almond	M8200-ILT	M8300-ILT
	White	M8200-ILW	M8300-ILW
- Duplex Receptacle - Smooth Face - Tamper-Resistant - Illuminated Blade Slot	Gray	MT820-ILG	MT830-ILG
	Ivory	MT820-ILI	MT830-ILI
	Red	MT820-ILR	MT830-ILR
	Lt Almond	MT820-ILT	MT830-ILT
	White	MT820-ILW	MT830-ILW




lev-lok®

SIMPLE AND SECURE



Install Wiring Module

All modules have a Circuit ID Label for ease of identification



Connect Wiring Device

Simply push and twist to lock connection



Finish Installation

Install device into box and finish with wallplate

MSTWL series wiring modules (sold separately) must be used with Lev-Lok receptacles. See page 27 for options and ordering information.



FOR MORE INFORMATION ON THE FULL LINE: www.leviton.com/levlok

lev-lok® Modular Wiring Devices: Receptacles

HOSPITAL GRADE Extra Heavy-Duty			NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt			Color	15 Amp	20 Amp	
DECORA PLUS™	- Duplex Receptacle - Smooth Face		Brown	M1626-HG0	M1636-HG	
			Blue	M1626-HGB	M1636-HGB	
			Black	M1626-HGE	M1636-HGE	
			Gray	M1626-HGG	M1636-HGG	
			Ivory	M1626-HGI	M1636-HGI	
			Red	M1626-HGR	M1636-HGR	
			Lt Almond	M1626-HGT	M1636-HGT	
			White	M1626-HGW	M1636-HGW	
	- Duplex Receptacle - Smooth Face - Tamper-Resistant		Gray	MT162-HGG	MT163-HGG	
			Ivory	MT162-HGI	MT163-HGI	
			Red	MT162-HGR	MT163-HGR	
			Lt Almond	—	MT163-HGT	
			White	MT162-HGW	MT163-HGW	
	- Duplex Receptacle - Smooth Face - Power Indication LED		Gray	M1626-PLG	M1636-PLG	
			Ivory	M1626-PLI	M1636-PLI	
			Red	M1626-PLR	M1636-PLR	
			Lt Almond	M1626-PLT	M1636-PLT	
			White	M1626-PLW	M1636-PLW	
	- Duplex Receptacle - Smooth Face - Illuminated Blade Slot		Gray	M1626-ILG	M1636-ILG	
			Ivory	M1626-ILI	M1636-ILI	
			Red	M1626-ILR	M1636-ILR	
			Lt Almond	M1626-ILT	M1636-ILT	
White			M1626-ILW	M1636-ILW		
- Duplex Receptacle - Smooth Face - Tamper-Resistant - Illuminated Blade Slot	 	Gray	MT162-ILG	MT163-ILG		
		Ivory	MT162-ILI	MT163-ILI		
		Red	MT162-ILR	MT163-ILR		
		Lt Almond	MT162-ILT	MT163-ILT		
		White	MT162-ILW	MT163-ILW		
HOSPITAL GRADE Heavy-Duty			NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt			Color	15 Amp	20 Amp	
STANDARD	- Duplex Receptacle - Smooth Face		Brown	M8200-H	M8300-H	
			Blue	M8200-HB	M8300-HB	
			Black	M8200-HE	M8300-HE	
			Gray	M8200-HGY	M8300-HGY	
			Ivory	M8200-HI	M8300-HI	
			Red	M8200-HR	M8300-HR	
			Lt Almond	M8200-HT	M8300-HT	
			White	M8200-HW	M8300-HW	



M8300-ILI



M1626-HGR

Receptacles must be used with MSTWL series wiring modules (sold separately). See pg 27 for module details.



MSTWL-R

lev-lok® Modular Wiring Devices: Receptacles

HOSPITAL GRADE Heavy-Duty



2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
STANDARD	- Duplex Receptacle - Smooth Face - Tamper-Resistant	Brown	MT820	MT830
		Blue	MT820-B	MT830-B
		Black	MT820-E	MT830-E
		Gray	MT820-GY	MT830-GY
		Ivory	MT820-I	MT830-I
		Red	MT820-R	MT830-R
		Lt Almond	MT820-T	MT830-T
		White	MT820-W	MT830-W
		Orange	M8200-IG	M8300-IG
		Black	M8200-IGE	M8300-IGE
		Gray	M8200-IGG	M8300-IGG
		Ivory	M8200-IGI	M8300-IGI
		Red	M8200-IGR	M8300-IGR
		Lt Almond	M8200-IGT	M8300-IGT
		White	M8200-IGW	M8300-IGW
DECORA PLUS™	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Isolated Ground	Brown	MT820-IG	MT830-IG
		Black	MT820-IGE	MT830-IGE
		Gray	MT820-IGG	MT830-IGG
		Ivory	MT820-IGI	MT830-IGI
		Red	MT820-IGR	MT830-IGR
		Lt Almond	MT820-IGT	MT830-IGT
		White	MT820-IGW	MT830-IGW
		Orange	MD820-IG	MD830-IG
		Black	MD820-IGE	MD830-IGE
		Gray	MD820-IGG	MD830-IGG
		Ivory	MD820-IGI	MD830-IGI
		Red	MD820-IGR	MD830-IGR
		Lt Almond	MD820-IGT	MD830-IGT
		White	MD820-IGW	MD830-IGW
	- Duplex Receptacle - Smooth Face - Isolated Ground - Tamper-Resistant	Orange	MDT82-IG	MDT83-IG
		Black	MDT82-IGE	MDT83-IGE
		Gray	MDT82-IGG	MDT83-IGG
		Ivory	MDT82-IGI	MDT83-IGI
		Red	MDT82-IGR	MDT83-IGR
		Lt Almond	MDT82-IGT	MDT83-IGT
		White	MDT82-IGW	MDT83-IGW



lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

STANDARD	- Duplex Receptacle - Smooth Face	Color	15 Amp	20 Amp
		Brown	M5262	M5362
		Blue	M5262-B	M5362-B
		Black	M5262-E	M5362-E
		Gray	M5262-GY	M5362-GY
		Ivory	M5262-I	M5362-I
		Red	M5262-R	M5362-R
		Lt Almond	M5262-T	M5362-T
		White	M5262-W	M5362-W
		Brown	M5262-SG	M5362-SG
		Blue	M5262-SGB	M5362-SGB
		Black	M5262-SGE	M5362-SGE
		Gray	M5262-SGG	M5362-SGG
		Ivory	M5262-SGI	M5362-SGI
		Red	M5262-SGR	M5362-SGR
		Lt Almond	M5262-SGT	M5362-SGT
		White	M5262-SGW	M5362-SGW



M5362-SGW

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

STANDARD	- Duplex Receptacle - Smooth Face - Tamper-Resistant	Color	15 Amp	20 Amp
		Brown	M5262-S	M5362-S
		Blue	M5262-SB	M5362-SB
		Black	M5262-SE	M5362-SE
		Gray	M5262-GYS	M5362-GYS
		Ivory	M5262-SI	M5362-SI
		Red	M5262-SR	M5362-SR
		Lt Almond	M5262-ST	M5362-ST
		White	M5262-SW	M5362-SW
		Brown	MT562-S	MT563-S
		Blue	MT562-SB	MT563-SB
		Black	MT562-SE	MT563-SE
		Gray	MT562-SGY	MT563-SGY
		Ivory	MT562-SI	MT563-SI
		Red	MT562-SR	MT563-SR
		Lt Almond	MT562-ST	MT563-ST
		White	MT562-SW	MT563-SW



Detail of the solid brass pins on the back of a Lev-Lok Receptacle (straps may vary by device).

Receptacles must be used with MSTWL series wiring modules (sold separately). See pg 27 for module details.



MSTWL-A

lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty



2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
- Duplex Receptacle - Smooth Face - Two Outlets Marked "Controlled"		Brown	M5262-2S	M5362-2S
		Black	M5262-2SE	M5362-2SE
		Gray	M5262-2SG	M5362-2SG
		Ivory	M5262-2SI	M5362-2SI
		Green	M5262-2SN	M5362-2SN
		Red	M5262-2SR	M5362-2SR
		Lt Almond	M5262-2ST	M5362-2ST
		Blue	M5262-2SU	M5362-2SU
		White	M5262-2SW	M5362-2SW
- Duplex Receptacle - Smooth Face - Split-Circuit - Separate lead provided		Brown	M5262-SC	M5362-SC
		Blue	M5262-SCB	M5362-SCB
		Black	M5262-SCE	M5362-SCE
		Gray	M5262-SCG	M5362-SCG
		Ivory	M5262-SCI	M5362-SCI
		Red	M5262-SCR	M5362-SCR
		Lt Almond	M5262-SCT	M5362-SCT
		White	M5262-SCW	M5362-SCW
- Duplex Receptacle - Smooth Face - Isolated Ground		Orange	M5262-IG	M5362-IG
		Black	M5262-IGE	M5362-IGE
		Gray	M5262-IGG	M5362-IGG
		Ivory	M5262-IGI	M5362-IGI
		Red	M5262-IGR	M5362-IGR
		Lt Almond	M5262-IGT	M5362-IGT
		White	M5262-IGW	M5362-IGW
- Duplex Receptacle - Smooth Face - Tamper-Resistant - Two Outlets Marked "Controlled"		Brown	MT562-2S	MT563-2S
		Black	MT562-2SE	MT563-2SE
		Gray	MT562-2SG	MT563-2SG
		Ivory	MT562-2SI	MT563-2SI
		Green	MT562-2SN	MT563-2SN
		Red	MT562-2SR	MT563-2SR
		Lt Almond	MT562-2ST	MT563-2ST
		Blue	MT562-2SU	MT563-2SU
		White	MT562-2SW	MT563-2SW
- Duplex Receptacle - Smooth Face - Tamper-Resistant - Split-Circuit - Separate lead provided		Brown	MT562-SC	MT563-SC
		Blue	MT562-SCB	MT563-SCB
		Black	MT562-SCE	MT563-SCE
		Gray	MT562-SCG	MT563-SCG
		Ivory	MT562-SCI	MT563-SCI
		Red	MT562-SCR	MT563-SCR
		Lt Almond	MT562-SCT	MT563-SCT
		White	MT562-SCW	MT563-SCW



MT563-SW



M5362-SCI

Receptacle modules are available in both stranded and solid wire. Options for 4-port push wire connectors are also available. See pg 27 for module details.



lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- Smooth Face
- Split-Circuit, One Outlet Marked "Controlled"
- Separate lead provided for controlled receptacle



Brown	M5262-1C	M5362-1C
Blue	M5262-1CB	M5362-1CB
Black	M5262-1CE	M5362-1CE
Gray	M5262-1CG	M5362-1CG
Ivory	M5262-1CI	M5362-1CI
Red	M5262-1CR	M5362-1CR
Lt Almond	M5262-1CT	M5362-1CT
White	M5262-1CW	M5362-1CW

STANDARD

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Split-Circuit, One Outlet Marked "Controlled"
- Separate lead provided for controlled receptacle



Brown	MT562-1C	MT563-1C
Blue	MT562-1CB	MT563-1CB
Black	MT562-1CE	MT563-1CE
Gray	MT562-1CG	MT563-1CG
Ivory	MT562-1CI	MT563-1CI
Red	MT562-1CR	MT563-1CR
Lt Almond	MT562-1CT	MT563-1CT
White	MT562-1CW	MT563-1CW

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Isolated Ground



Orange	MT562-IG	MT563-IG
Black	MT562-IGE	MT563-IGE
Gray	MT562-IGG	MT563-IGG
Ivory	MT562-IGI	MT563-IGI
Red	MT562-IGR	MT563-IGR
Lt Almond	MT562-IGT	MT563-IGT
White	MT562-IGW	MT563-IGW

DECORA PLUS™

- Duplex Receptacle
- Smooth Face

Brown	M1626	M1636
Blue	M1626-B	M1636-B
Black	M1626-E	M1636-E
Gray	M1626-GY	M1636-GY
Ivory	M1626-I	M1636-I
Red	M1626-R	M1636-R
Lt Almond	M1626-T	M1636-T
White	M1626-W	M1636-W

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant



Brown	MT162	MT163
Blue	MT162-B	MT163-B
Black	MT162-E	MT163-E
Gray	MT162-GY	MT163-GY
Ivory	MT162-I	MT163-I
Red	MT162-R	MT163-R
Lt Almond	MT162-T	MT163-T
White	MT162-W	MT163-W



M5362-2SW



MT562-SCG

Receptacles must be used with MSTWL series wiring modules (sold separately). See pg 27 for module details.



MSTWL-SIG

lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- Smooth Face
- Two Outlets Marked "Controlled"



Brown	M1626-2S	M1636-2S
Black	M1626-2SE	M1636-2SE
Gray	M1626-2SG	M1636-2SG
Ivory	M1626-2SI	M1636-2SI
Green	M1626-2SN	M1636-2SN
Red	M1626-2SR	M1636-2SR
Lt Almond	M1626-2ST	M1636-2ST
Blue	M1626-2SU	M1636-2SU
White	M1626-2SW	M1636-2SW

- Duplex Receptacle
- Smooth Face
- Split-Circuit
- Separate lead provided



Brown	M1626-SC	M1636-SC
Blue	M1626-SCB	M1636-SCB
Black	M1626-SCE	M1636-SCE
Gray	M1626-SCG	M1636-SCG
Ivory	M1626-SCI	M1636-SCI
Red	M1626-SCR	M1636-SCR
Lt Almond	M1626-SCT	M1636-SCT
White	M1626-SCW	M1636-SCW

- Duplex Receptacle
- Smooth Face
- Isolated Ground



Orange	M1626-IG	M1636-IG
Black	M1626-IGE	M1636-IGE
Gray	M1626-IGG	M1636-IGG
Ivory	M1626-IGI	M1636-IGI
Red	M1626-IGR	M1636-IGR
Lt Almond	M1626-IGT	M1636-IGT
White	M1626-IGW	M1636-IGW

- Duplex Receptacle
- Smooth Face
- Split-Circuit, One Outlet Marked "Controlled"



Brown	M1626-1C	M1636-1C
Blue	M1626-1CB	M1636-1CB
Black	M1626-1CE	M1636-1CE
Gray	M1626-1CG	M1636-1CG
Ivory	M1626-1CI	M1636-1CI
Red	M1626-1CR	M1636-1CR
Lt Almond	M1626-1CT	M1636-1CT
White	M1626-1CW	M1636-1CW

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Two Outlets Marked "Controlled"



Brown	MT162-2	MT163-2
Blue	MT162-2BU	MT163-2BU
Black	MT162-2E	MT163-2E
Green	MT162-2GN	MT163-2GN
Gray	MT162-2GY	MT163-2GY
Ivory	MT162-2I	MT163-2I
Red	MT162-2R	MT163-2R
Lt Almond	MT162-2T	MT163-2T
White	MT162-2W	MT163-2W



lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Split-Circuit
- Separate lead provided



Brown	MT162-SC	MT163-SC
Blue	MT162-SCB	MT163-SCB
Black	MT162-SCE	MT163-SCE
Gray	MT162-SCG	MT163-SCG
Ivory	MT162-SCI	MT163-SCI
Red	MT162-SCR	MT163-SCR
Lt Almond	MT162-SCT	MT163-SCT
White	MT162-SCW	MT163-SCW



DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Isolated Ground



Orange	MT162-IG	MT163-IG
Black	MT162-IGE	MT163-IGE
Gray	MT162-IGG	MT163-IGG
Ivory	MT162-IGI	MT163-IGI
Red	MT162-IGR	MT163-IGR
Lt Almond	MT162-IGT	MT163-IGT
White	MT162-IGW	MT163-IGW

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Split-Circuit, One Outlet Marked "Controlled"
- Separate lead provided for controlled receptacle



Brown	MT162-1C	MT163-1C
Blue	MT162-1CB	MT163-1CB
Black	MT162-1CE	MT163-1CE
Gray	MT162-1CG	MT163-1CG
Ivory	MT162-1CI	MT163-1CI
Red	MT162-1CR	MT163-1CR
Lt Almond	MT162-1CT	MT163-1CT
White	MT162-1CW	MT163-1CW



lev-lok® Modular Wiring Devices: GFCI Receptacles

HOSPITAL GRADE Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- SmartlockPro® Self-Test GFCI
- Duplex Receptacle
- Power Indication LED
- Back and Side Wire
- 20 Amp Feed-Through Terminals



Brown	MGFN1-HG	MGFN2-HG
Black	MGFN1-HGE	MGFN2-HGE
Gray	MGFN1-HGG	MGFN2-HGG
Ivory	MGFN1-HGI	MGFN2-HGI
Red	MGFN1-HGR	MGFN2-HGR
Lt Almond	MGFN1-HGT	MGFN2-HGT
White	MGFN1-HGW	MGFN2-HGW

- SmartlockPro® Self-Test GFCI
- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Back and Side Wire
- 20 Amp Feed-Through Terminals



Brown	MGFT1-HG	MGFT2-HG
Black	MGFT1-HGE	MGFT2-HGE
Gray	MGFT1-HGG	MGFT2-HGG
Ivory	MGFT1-HGI	MGFT2-HGI
Red	MGFT1-HGR	MGFT2-HGR
Lt Almond	MGFT1-HGT	MGFT2-HGT
White	MGFT1-HGW	MGFT2-HGW



lev-lok® Modular Wiring Devices: GFCI Receptacles

INDUSTRIAL SPECIFICATION GRADE Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
DECORA PLUS™	- SmartlockPro® Self-Test GFCI - Duplex Receptacle - Power Indication LED 20 Amp Feed-Through Terminals	Brown	MGFN1	MGFN2
		Black	MGFN1-E	MGFN2-E
		Gray	MGFN1-GY	MGFN2-GY
		Ivory	MGFN1-I	MGFN2-I
		Red	MGFN1-R	MGFN2-R
		Lt Almond	MGFN1-T	MGFN2-T
		White	MGFN1-W	MGFN2-W
	- SmartlockPro® Self-Test GFCI - Duplex Receptacle - Power Indication LED - Tamper-Resistant 20 Amp Feed-Through Terminals	Brown	MGFT1	MGFT2
		Black	MGFT1-E	MGFT2-E
		Gray	MGFT1-GY	MGFT2-GY
		Ivory	MGFT1-I	MGFT2-I
		Red	MGFT1-R	MGFT2-R
		Lt Almond	MGFT1-T	MGFT2-T
		White	MGFT1-W	MGFT2-W



MGFN2-GY



M58AA-HGR



M56AC-HGW

lev-lok® Modular Wiring Devices: USB Receptacles

HOSPITAL GRADE Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
DECORA PLUS™	- Duplex Receptacle - Two Type A USB Ports - Smooth Face - Tamper-Resistant	Brown	M56AA-HG	M58AA-HG
		Black	M56AA-HGE	M58AA-HGE
		Gray	M56AA-HGG	M58AA-HGG
		Ivory	M56AA-HGI	M58AA-HGI
		Lt Almond	M56AA-HGT	M58AA-HGT
		White	M56AA-HGW	M58AA-HGW
		Red	M56AA-HGR	M58AA-HGR
	- Duplex Receptacle - One Type A & One Type C USB Port - Smooth Face - Tamper-Resistant	Brown	M56AC-HG	M58AC-HG
		Black	M56AC-HGE	M58AC-HGE
		Gray	M56AC-HGG	M58AC-HGG
		Ivory	M56AC-HGI	M58AC-HGI
		Lt Almond	M56AC-HGT	M58AC-HGT
		White	M56AC-HGW	M58AC-HGW
		Red	M56AC-HGR	M58AC-HGR

lev-lok® Modular Wiring Devices: USB Receptacles

COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt	Color	15 Amp	20 Amp
DECORA PLUS™ - Duplex Receptacle - Two Type A USB Ports - Smooth Face - Tamper-Resistant	Brown	M56AA	M58AA
	Black	M56AA-E	M58AA-E
	Gray	M56AA-GY	M58AA-GY
	Ivory	M56AA-I	M58AA-I
	Lt Almond	M56AA-T	M58AA-T
	White	M56AA-W	M58AA-W
	Blue	M56AA-B	M58AA-B
	Red	M56AA-R	M58AA-R
	Orange	M56AA-O	M58AA-O
	Green	M56AA-N	M58AA-N
	Brown	M56AC	M58AC
	Black	M56AC-E	M58AC-E
	Gray	M56AC-GY	M58AC-GY
	Ivory	M56AC-I	M58AC-I
- Duplex Receptacle - One Type A & One Type C USB Port - Smooth Face - Tamper-Resistant	Lt Almond	M56AC-T	M58AC-T
	White	M56AC-W	M58AC-W
	Blue	M56AC-B	M58AC-B
	Red	M56AC-R	M58AC-R
	Orange	M56AC-O	M58AC-O
	Green	M56AC-N	M58AC-N



lev-lok® Modular Wiring Devices: Surge Receptacles

HOSPITAL GRADE Heavy-Duty		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt	Color	15 Amp	20 Amp
DECORA PLUS™ - Duplex Receptacle - Surge Protective - Tamper-Resistant - Audible Alarm	Blue	MT828-B	MT838-B
	Gray	—	MT838-GY
	Ivory	MT828-I	MT838-I
	Red	—	MT838-R
	Lt Almond	MT828-T	—
	White	MT828-W	MT838-W
COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt	Color	15 Amp	20 Amp
DECORA PLUS™ - Duplex Receptacle - Surge Protective - Tamper-Resistant	Brown	MT528	MT538
	Blue	MT528-B	MT538-B
	Black	MT528-E	MT538-E
	Gray	MT528-GY	MT538-GY
	Ivory	MT528-I	MT538-I
	Lt Almond	MT528-T	—
	White	MT528-W	MT538-W



lev-lok® Circuit Analyzer

Connect the receptacle wiring module to the circuit analyzer to confirm that wiring is correct, or identify a wiring problem.

Catalog Number: LVLOK-TST

lev-lok® Modular Wiring Devices: Surge Receptacles

COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R	NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp	
DECORA PLUS™ - Duplex Receptacle - Surge Protective - Tamper-Resistant		Brown	MT528	MT538
		Blue	MT528-B	MT538-B
		Black	MT528-E	MT538-E
		Gray	MT528-GY	MT538-GY
		Ivory	MT528-I	MT538-I
	 	Lt Almond	MT528-T	—
		White	MT528-W	MT538-W
		Blue	MT728-B	MT738-B
		Black	MT728-E	MT738-E
		Ivory	MT728-I	MT738-I
 	Lt Almond	MT728-T	—	
	White	MT728-W	MT738-W	



MT528-GY



lev-lok® Modular Wiring Receptacle Modules

20 Amp, 125 Volt Max.	Module Color	Wire Type	Wire Colors	Catalog Number
Stranded Wire Leads	White	THHN	Black, White, Green	MSTWL-A
Stranded Wire Leads with 4-Port Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WST
Stranded Wire Leads for Emergency Circuits	Red	THHN	Black, White, Green	MSTWL-R
Stranded Wire Leads for Isolated Ground Circuits	Orange	THHN	Black, White, Green	MSTWL-IG
Stranded Wire Leads with 4-Port Push Wire Connectors for Isolated Ground Circuits	Orange	THHN	Black, White, Green	MSTWL-WIG
Solid Wire Leads	White	THHN	Black, White, Green	MSTWL-SDA
Solid Wire Leads for Isolated Ground Circuits	Orange	THHN	Black, White, Green	MSTWL-SIG
Solid Wire Leads with 4-Port Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WSD
Stranded Wire Leads for Low Leakage Circuits	White	XHHW-2	Orange, Brown, Green/Yellow	MSTWL-XA*
Stranded Wire Leads for Low Leakage Circuits	White	XHHW-2	Brown/Yellow, Orange/Blue, Green/Yellow	MSTWL-XI*
Stranded Wire Leads for Low Leakage Circuits	White	XHHW-2	Black, White, Green/Yellow	MSTWL-XN*

*Add suffix of 0 for 6", 1 for 12", 2 for 24" or 3 for 36" long leads; please allow 4 to 6 weeks for delivery





Receptacles with Pre-Wired Leads

KEY FEATURES & BENEFITS


- Eliminates the need to make pigtails
- Available in the most common configurations
- No terminal screws means faster wiring and no need to wrap device with electrical tape

HOSPITAL GRADE Heavy-Duty		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
STANDARD	• Duplex Receptacle • Smooth Face • Pre-Wired Leads	Brown	8200-L	8300-L	
		Black	—	8300-LE	
		Gray	8200-LGY	8300-LGY	
		Ivory	8200-LI	8300-LI	
		Red	8200-LR	8300-LR	
		White	8200-LW	8300-LW	
	• Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	Gray	8200-CGY	8300-CGY	
		Ivory	8200-CI	8300-CI	
		White	8200-CW	8300-CW	
INDUSTRIAL SPECIFICATION GRADE Heavy-Duty		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
STANDARD	• Duplex Receptacle • Smooth Face • Pre-Wired Leads	Brown	5262-L0	5362-L0	
		Black	5262-LE	5362-LE	
		Gray	5262-LGY	5362-LGY	
		Ivory	5262-LI	5362-LI	
		Red	5262-LR	5362-LR	
		Lt Almond	—	5362-LT	
	• Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	White	5262-LW	5362-LW	
		Gray	5262-CGY	—	
		Ivory	5262-CI	—	
		White	5262-CW	—	
COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
STANDARD	• Duplex Receptacle • Smooth Face • Pre-Wired Leads	Brown	—	5340	
		Ivory	5040-I	5340-I	
		White	5040-W	5340-W	
		Gray	—	5340-GY	
	• Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	Gray	5040-CGY	5340-CGY	
		Ivory	5040-CI	5340-CI	
		White	5040-CW	5340-CW	

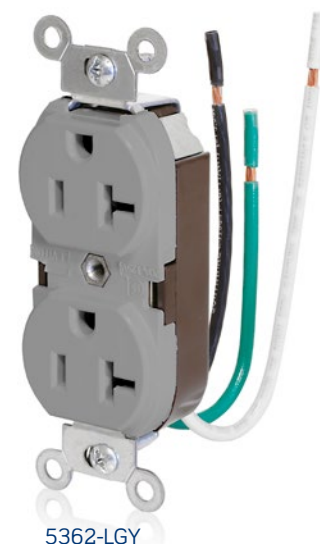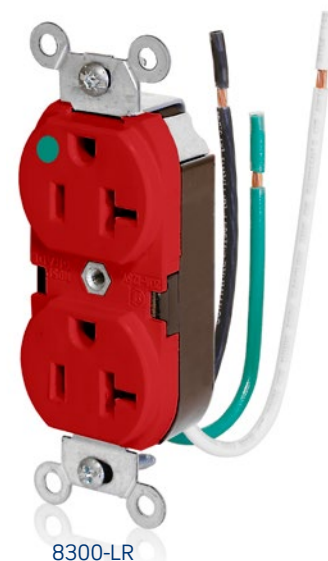


Receptacles with Pre-Wired Leads

COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R 	NEMA 5-20R 	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
DECORA PLUS™	- Duplex Receptacle - Smooth Face - Pre-Wired Leads	Brown	16252-L0	16352-L0
		Black	16252-LE	16352-LE
		Gray	16252-LGY	16352-LGY
		Ivory	16252-LI	16352-LI
		White	16252-LW	16352-LW
	- Duplex Receptacle - Smooth Face - Pre-Wired Leads (hot and neutral only)	Gray	—	16352-CGY
		Ivory	—	16352-CI
		White	—	16352-CW

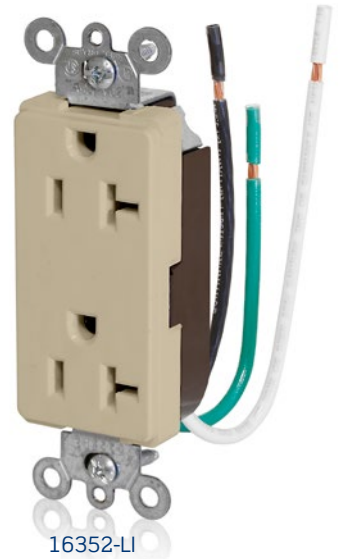

GFCI Receptacles with Pre-Wired Leads

INDUSTRIAL SPECIFICATION GRADE Extra Heavy-Duty		NEMA 5-15R		NEMA 5-20R		
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp		
DECORA PLUS™	• SmartlockPro® Self-Test GFCI • Duplex Receptacle • Power Indication LED • Tamper-Resistant • 5 Pre-Wired Leads • 20 Amp Feed-Through Terminals 	Brown	GFTR1-5L	GFTR2-5L		
		Black	GFTR1-5LE	GFTR2-5LE		
		Gray	GFTR1-5LG	GFTR2-5LG		
		Ivory	GFTR1-5LI	GFTR2-5LI		
		Red	GFTR1-5LR	GFTR2-5LR		
		Lt Almond	GFTR1-5LT	GFTR2-5LT		
		White	GFTR1-5LW	GFTR2-5LW		
		• SmartlockPro® Self-Test GFCI • Duplex Receptacle • Power Indication LED • Tamper-Resistant • 3 Pre-Wired Leads (for non-feed through loads) 	Brown	GFTR1-3L	GFTR2-3L	
			Black	GFTR1-3LE	GFTR2-3LE	
	Gray		GFTR1-3LG	GFTR2-3LG		
	Ivory		GFTR1-3LI	GFTR2-3LI		
	Red		GFTR1-3LR	GFTR2-3LR		
	Lt Almond		GFTR1-3LT	GFTR2-3LT		
	White		GFTR1-3LW	GFTR2-3LW		

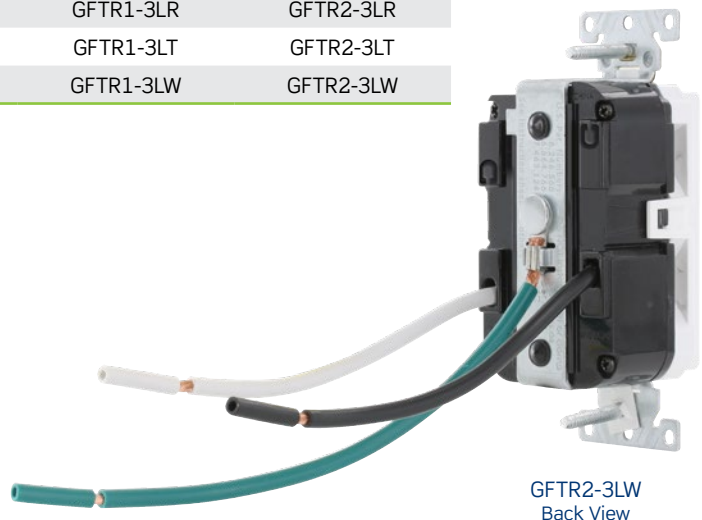

smartlockpro® AFCI Receptacles

Outlet Branch Circuit (OBC) AFCI Devices offer advanced technology to help protect against electrical fires. These devices are designed to interrupt power in the event potentially hazardous arcing is detected, which could originate from a number of sources including damaged wires and cords. Meeting the latest UL requirements for OBC AFCI outlets, they provide protection against series and parallel arcs. SmartlockPro® OBC AFCI devices feature Leviton's patented reset lockout and tamper-resistant technology. AFCI's are now required by the National Electrical Code® (NEC) in many areas.

HOSPITAL GRADE Heavy-Duty		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp
DECORA PLUS™	- Duplex Receptacle - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included		
	Color		
	Brown	AFTR1-HG	AFTR2-HG
	Black	AFTR1-HGE	AFTR2-HGE
	Gray	AFTR1-HGG	AFTR2-HGG
	Ivory	AFTR1-HGI	AFTR2-HGI
	Red	AFTR1-HGR	AFTR2-HGR
	Lt Almond	AFTR1-HGT	AFTR2-HGT
	White	AFTR1-HGW	AFTR2-HGW
RESIDENTIAL/COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp
DECORA®	- Duplex Receptacle - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included		
	Color		
	Brown	AFTR1	AFTR2
	Black	AFTR1-E	AFTR2-E
	Gray	AFTR1-GY	AFTR2-GY
	Ivory	AFTR1-I	AFTR2-I
	Lt Almond	AFTR1-T	AFTR2-T
	White	AFTR1-W	AFTR2-W
	Blank Face Receptacle	—	AFRBF-I
	Power Indication LED	—	AFRBF-T
	Back and Side Wire	—	AFRBF-W
	20 Amp Feed-Through Terminals	—	AFRBF-W



smartlockpro® GFCI Receptacles

The SmartlockPro® Self-Test GFCIs contain the latest innovation in ground fault protection by automatically conducting a periodic internal test to confirm that the GFCI is able to respond to a ground fault. Easy to install, they take up to 25% less space in the wallbox vs. typical GFCIs and can fit into any box, even shallow ones. These slim GFCIs provide all the lockout benefits of our standard SmartlockPro® offering, and are available in tamper-resistant and non tamper-resistant versions. Constructed of resilient thermoplastic and able to withstand high torque levels, self-test GFCIs come in styles for every need, including a combination guide light/receptacle and a blankface device.

HOSPITAL GRADE Extra Heavy-Duty		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt	Color	15 Amp	20 Amp
- Duplex Receptacle - Power Indication LED - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included	Brown	GFNT1-HG	GFNT2-HG
	Black	GFNT1-HGE	GFNT2-HGE
	Gray	GFNT1-HGG	GFNT2-HGG
	Ivory	GFNT1-HGI	GFNT2-HGI
	Red	GFNT1-HGR	GFNT2-HGR
	Lt Almond	GFNT1-HGT	GFNT2-HGT
	White	GFNT1-HGW	GFNT2-HGW
- Duplex Receptacle - Power Indication LED - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included NAFTA Compliant	Brown	GFNT1-HF	GFNT2-HF
	Black	GFNT1-HFE	GFNT2-HFE
	Gray	GFNT1-HFG	GFNT2-HFG
	Ivory	GFNT1-HFI	GFNT2-HFI
	Red	GFNT1-HFR	GFNT2-HFR
	Lt Almond	GFNT1-HFT	GFNT2-HFT
	White	GFNT1-HFW	GFNT2-HFW
DECORA PLUS™ - Duplex Receptacle - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included	Brown	GFTR1-HG	GFTR2-HG
	Black	GFTR1-HGE	GFTR2-HGE
	Gray	GFTR1-HGG	GFTR2-HGG
	Ivory	GFTR1-HGI	GFTR2-HGI
	Red	GFTR1-HGR	GFTR2-HGR
	Lt Almond	GFTR1-HGT	GFTR2-HGT
	White	GFTR1-HGW	GFTR2-HGW
- Duplex Receptacle - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included NAFTA Compliant	Brown	GFTR1-HF	GFTR2-HF
	Black	GFTR1-HFE	GFTR2-HFE
	Gray	GFTR1-HFG	GFTR2-HFG
	Ivory	GFTR1-HFI	GFTR2-HFI
	Red	GFTR1-HFR	GFTR2-HFR
	Lt Almond	GFTR1-HFT	GFTR2-HFT
	White	GFTR1-HFW	GFTR2-HFW
- Duplex Receptacle - Power Indication LED - Weather and Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included	Brown	GFWT1-HG	GFWT2-HG
	Black	GFWT1-HGE	GFWT2-HGE
	Gray	GFWT1-HGG	GFWT2-HGG
	Ivory	GFWT1-HGI	GFWT2-HGI
	Red	GFWT1-HGR	GFWT2-HGR
	Lt Almond	GFWT1-HGT	GFWT2-HGT
	White	GFWT1-HGW	GFWT2-HGW


GFCI Status Indicator Light

Leviton GFCI devices feature an LED Status Indicator Light which provides a visual indication to the user of the status of GFCI protection. This is a convenient way to check the level of protection at-a-glance.



Green LED - Normal Operation.

- GFCI has passed self-test and is providing power



Red LED - Alert!

- Blinking - Initial self-test upon first power up
- Solid or blinking - Press TEST and RESET buttons to reset GFCI
- If GFCI will not reset OR solid or blinking red continues, replace device



No LED - No Power.

- GFCI in tripped state
- Press RESET button
- If GFCI will not reset, no power on the circuit

smartlockpro® GFCI Receptacles

HOSPITAL GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- Tamper-Resistant
- Guidelight
- Power Indication LED
- Back and Side Wire
- 20 Amp Feed-Through Terminals
- Wallplate Included



Brown	GFNL1-HG	GFNL2-HG
Black	GFNL1-HGE	GFNL2-HGE
Gray	GFNL1-HGG	GFNL2-HGG
Ivory	GFNL1-HGI	GFNL2-HGI
Red	GFNL1-HGR	GFNL2-HGR
Lt Almond	GFNL1-HGT	GFNL2-HGT
White	GFNL1-HGW	GFNL2-HGW

INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- DIN Rail Mount
- Power Indication LED
- Terminal Blocks
- 20 Amp Feed-Through Terminals
- Grounding



Black	GFNT1-DIN	GFNT2-DIN
-------	-----------	-----------

- Duplex Receptacle
- Power Indication LED
- Back and Side Wire
- 20 Amp Feed-Through Terminals



Brown	G5262	G5362
Black	G5262-E	G5362-E
Gray	G5262-GY	G5362-GY
Ivory	G5262-I	G5362-I
Red	G5262-R	G5362-R
Lt Almond	G5262-T	G5362-T
White	G5262-W	G5362-W

- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Back and Side Wire
- 20 Amp Feed-Through Terminals



Brown	G5262-OT0	G5362-OT0
Black	G5262-OTE	G5362-OTE
Gray	G5262-TGY	G5362-TGY
Ivory	G5262-OTI	G5362-OTI
Red	G5262-OTR	G5362-OTR
Lt Almond	G5262-OTT	G5362-OTT
White	G5262-OTW	G5362-OTW

- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Two Outlets Marked "Controlled"
- Back and Side Wire
- 20 Amp Feed-Through Terminals



Green	—	G5362-2TN
-------	---	-----------

- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Isolated Ground
- Back and Side Wire
- 20 Amp Feed-Through Terminals



Brown	GFTR1-IG	GFTR2-IG
Black	GFTR1-IGE	GFTR2-IGE
Gray	GFTR1-IGG	GFTR2-IGG
Ivory	GFTR1-IGI	GFTR2-IGI
Orange	GFTR1-IGO	GFTR2-IGO
Red	GFTR1-IGR	GFTR2-IGR
Lt Almond	GFTR1-IGT	GFTR2-IGT
White	GFTR1-IGW	GFTR2-IGW



GFTR2-HGI



GFTR2-IGO



G5362-WTW

smartlockpro® GFCI Receptacles

INDUSTRIAL SPECIFICATION GRADE Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

DECORA PLUS™	• Duplex Receptacle	Brown	G5262-WT	G5362-WT
	• Weather and Tamper-Resistant	Black	G5262-WTE	G5362-WTE
	• Power Indication LED	Gray	G5262-WTG	G5362-WTG
	• Back and Side Wire	Ivory	G5262-WTI	G5362-WTI
	• 20 Amp Feed-Through Terminals	Red	G5262-WTR	G5362-WTR
	• Wallplate Included	Lt Almond	G5262-WTT	G5362-WTT
		White	G5262-WTW	G5362-WTW
	• Single Receptacle	Brown	GFPL1-PL	GFPL2-PL
	• Tamper-Resistant	Black	GFPL1-PLE	GFPL2-PLE
	• Pilot Light (Illuminated - ON)	Gray	GFPL1-PLG	GFPL2-PLG
	• Back and Side Wire	Ivory	GFPL1-PLI	GFPL2-PLI
	• 20 Amp Feed-Through Terminals	Red	GFPL1-PLR	GFPL2-PLR
	• Wallplate Included	Lt Almond	GFPL1-PLT	GFPL2-PLT
		White	GFPL1-PLW	GFPL2-PLW



RESIDENTIAL/COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

	• Duplex Receptacle	Brown	GFNT1	GFNT2
	• Power Indication LED	Black	GFNT1-E	GFNT2-E
	• Back and Side Wire	Gray	GFNT1-GY	GFNT2-GY
	• 20 Amp Feed-Through Terminals	Ivory	GFNT1-I	GFNT2-I
	• Wallplate Included	Red	—	GFNT2-R
		Lt Almond	GFNT1-T	GFNT2-T
		White	GFNT1-W	GFNT2-W
	• Duplex Receptacle	Brown	GFTR1	GFTR2
	• Power Indication LED	Black	GFTR1-E	GFTR2-E
	• Tamper-Resistant	Gray	GFTR1-GY	GFTR2-GY
	• Back and Side Wire	Ivory	GFTR1-I	GFTR2-I
	• 20 Amp Feed-Through Terminals	Red	—	GFTR2-R
	• Wallplate Included	Lt Almond	GFTR1-T	GFTR2-T
		White	GFTR1-W	GFTR2-W
	• Duplex Receptacle	Black	GFWR1-E*	GFWR2-E*
	• Power Indication LED	White	GFWR1-W*	GFWR2-W*
	• Weather-Resistant			
	• Back and Side Wire			
	• 20 Amp Feed-Through Terminals			
	• Duplex Receptacle	Black	GFWT1-E*	GFWT2-E*
	• Power Indication LED	Gray	GFWT1-GY*	GFWT2-GY*
	• Weather and Tamper-Resistant	Ivory	GFWT1-I*	GFWT2-I*
	• Back and Side Wire	Lt Almond	GFWT1-T*	GFWT2-T*
	• 20 Amp Feed-Through Terminals	White	GFWT1-W*	GFWT2-W*



* No self-grounding clip on device

Protection

smartlockpro® GFCI Receptacles

RESIDENTIAL/COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R	NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
DECORA®	- Duplex Receptacle Guidelight - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals  	Black	GFNL1-E	—
		Ivory	GFNL1-I	GFNL2-I
		Lt Almond	GFNL1-T	GFNL2-T
		White	GFNL1-W	GFNL2-W
	- Duplex Receptacle - Power Indication LED - Tamper-Resistant - Audible Trip Alert - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included   	Ivory	GFTA1-I	GFTA2-I
		Lt Almond	GFTA1-T	GFTA2-T
		White	GFTA1-W	GFTA2-W
	- Combination Switch with Single Receptacle - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included  	Ivory	GFSW1-I	—
		Lt Almond	GFSW1-T	—
		White	GFSW1-W	—

smartlockpro® Dual Function AFCI/GFCI Receptacles

The SmartlockPro AFCI/GFCI Receptacle offers an effective alternative to a Dual Function breaker and features the convenience of localized test and reset. It provides clear visual indication of status making it intuitive for users to assess various conditions such as power availability and GFCI self-test status. The device also distinguishes between a trip caused by a ground fault and a trip caused by an arc fault.

RESIDENTIAL/COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
DECORA®	• Duplex Receptacle	Brown	AGTR1	AGTR2	
	• Power Indication LED	Black	AGTR1-E	AGTR2-E	
	• Tamper-Resistant	Gray	AGTR1-GY	AGTR2-GY	
	• Back and Side Wire	Ivory	AGTR1-I	AGTR2-I	
	• 20 Amp Feed-Through Terminals	Lt Almond	AGTR1-T	AGTR2-T	
	• Wallplate Included	White	AGTR1-W	AGTR2-W	

Dual Function AFCI/GFCI Status Indicator Light



Solid Green LED.

- Load Power ON.
- RESET button is in.
Device is in normal working state.
- Load Power OFF.
- RESET button is out.
Line & load wires are reversed.



Solid or Constant Flashing Red LED.

- Load Power ON.
- RESET button is in.
Press TEST button & RESET button.
If RED indication continues or will not RESET, replace device.
- Load Power OFF.
- RESET button is out.
Device has tripped & self-test function detects a potential problem.
If RED indication continues or will not RESET, replace device.

LED OFF & Flashes Red Twice Every 5 Seconds.

- Load Power OFF.
- RESET button is out.
AFCI trip; press RESET, if device continues to trip, contact an electrician.



LED is OFF.

- Load Power OFF.
RESET button is out.
GFCI trip; press RESET, if device will not reset, there is no power on the circuit.

Surge Protective Receptacles

The value of these receptacles and ease of installation allow for placement anywhere you have a standard electrical outlet. With a small investment, you have the assurance that your equipment is well protected, from a heart monitor in the emergency room, to a computer in the office, or a big screen TV in the living room.

HOSPITAL GRADE Heavy-Duty		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp
• Duplex Receptacle • Indicator Light • Back and Side Wire • Wallplate Included	Brown	8280	8380
	Blue	8280-B	8380-B
	Gray	—	8380-GY
	Ivory	8280-I	8380-I
	Red	8280-R	8380-R
	Lt Almond	8280-T	—
	Ivory	8280-W	8380-W
	Ivory	—	8381-I
• Single Receptacle • Indicator Light • Audible Alarm • Back and Side Wire • Wallplate Included	Blue	T8280-B	T8380-B
	Gray	—	T8380-GY
	Ivory	T8280-I	T8380-I
	Red	T8280-R	T8380-R
	Lt Almond	T8280-T	—
	White	T8280-W	T8380-W
	Ivory	—	8381-IGI
	Ivory	—	8381-IGI
• Duplex Receptacle • Indicator Light • Audible Alarm • Tamper-Resistant • Back and Side Wire • Wallplate Included	Blue	8280-IGB	8380-IGB
	Gray	—	8380-IGG
	Ivory	8280-IGI	8380-IGI
	Orange	8280-IGO	8380-IGO
	White	8280-IGW	8380-IGW
	Ivory	—	8381-IGI
	Ivory	—	8381-IGI
	Ivory	—	8381-IGI
• Duplex Receptacle • Indicator Light • Audible Alarm • Isolated Ground • Back and Side Wire • Wallplate Included	Blue	8280-IGB	8380-IGB
	Gray	—	8380-IGG
	Ivory	8280-IGI	8380-IGI
	Orange	8280-IGO	8380-IGO
	White	8280-IGW	8380-IGW
	Ivory	—	8381-IGI
	Ivory	—	8381-IGI
	Ivory	—	8381-IGI



Surge Protective Receptacles

COMMERCIAL SPECIFICATION GRADE

NEMA
5-15R

NEMA
5-20R

2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- Indicator Light
- Back and Side Wire
- Wallplate Included

Brown

5280

5380

Blue

5280-B

5380-B

Gray

5280-GY

5380-GY

Ivory

5280-I

5380-I

Red

5280-R

5380-R

Lt Almond

5280-T

—

White

5280-W

5380-W

- Duplex Receptacle
- Indicator Light
- Isolated Ground
- Back and Side Wire
- Wallplate Included



Brown

5280-IG

5380-IG

Blue

5280-IGB

5380-IGB

Gray

—

5380-IGG

Ivory

5280-IGI

5380-IGI

Orange

5280-IGO

5380-IGO

White

5280-IGW

5380-IGW

- Duplex Receptacle
- Indicator Light
- Audible Alarm
- Back and Side Wire
- Wallplate Included



Brown

7280-B

—

Blue

—

7380-B

Gray

—

7380-GY

Ivory

7280-I

7380-I

Lt Almond

7280-T

—

White

7280-W

7380-W

- Duplex Receptacle
- Indicator Light
- Tamper-Resistant
- Back and Side Wire
- Wallplate Included



Brown

T5280

T5380

Blue

T5280-B

T5380-B

Black

T5280-E

T5380-E

Gray

T5280-GY

T5380-GY

Ivory

T5280-I

T5380-I

Lt Almond

T5280-T

T5380-T

White

T5280-W

T5380-W

- Duplex Receptacle
- Indicator Light
- Audible Alarm
- Tamper-Resistant
- Back and Side Wire
- Wallplate Included



Blue

T7280-B

T7380-B

Black

T7280-E

T7380-E

Ivory

T7280-I

T7380-I

Lt Almond

T7280-T

—

White

T7280-W

T7380-W



7380-W



5380-IGI



T5380-W

Marked "Controlled" Receptacles

INDUSTRIAL SPECIFICATION GRADE Extra Heavy-Duty			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R	NEMA 5-20R
STANDARD	Color	15 Amp	20 Amp
	• Duplex Receptacle	Brown 5262-1P	5362-1P
	• Smooth Face	Blue 5262-1PB	5362-1PB
	• Split-Circuit, One Outlet Marked "Controlled"	Black 5262-1PE	5362-1PE
	• Tamper-Resistant	Gray 5262-1PG	5362-1PG
	• Back and Side Wire	Ivory 5262-1PI	5362-1PI
		Red 5262-1PR	5362-1PR
		Lt Almond 5262-1PT	5362-1PT
		White 5262-1PW	5362-1PW
STANDARD	Color	15 Amp	20 Amp
	• Duplex Receptacle	Brown 5262-2P	5362-2P
	• Smooth Face	Blue 5262-2PB	5362-2PB
	• Two Outlets Marked "Controlled"	Black 5262-2PE	5362-2PE
	• Tamper-Resistant	Gray 5262-2PG	5362-2PG
	• Back and Side Wire	Ivory 5262-2PI	5362-2PI
		Green —	5362-2PN
		Red 5262-2PR	5362-2PR
		Lt Almond 5262-2PT	5362-2PT
		White 5262-2PW	5362-2PW
INDUSTRIAL SPECIFICATION GRADE Heavy-Duty			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R	NEMA 5-20R
STANDARD	Color	15 Amp	20 Amp
	• Duplex Receptacle	Brown 5262-S2	5362-S2
	• Smooth Face	Blue 5262-S2B	5362-S2B
	• Two Outlets Marked "Controlled"	Black 5262-S2E	5362-S2E
	• Back and Side Wire	Gray 5262-S2G	5362-S2G
		Ivory 5262-S2I	5362-S2I
		Green —	5362-S2N
		Red 5262-S2R	5362-S2R
		Lt Almond 5262-S2T	5362-S2T
		White 5262-S2W	5362-S2W
STANDARD	Color	15 Amp	20 Amp
	• Duplex Receptacle	Brown 5262-S1	5362-S1
	• Smooth Face	Blue 5262-S1B	5362-S1B
	• Split-Circuit, One Outlet Marked "Controlled"	Black 5262-S1E	5362-S1E
	• Back and Side Wire	Gray 5262-S1G	5362-S1G
		Ivory 5262-S1I	5362-S1I
		Green —	5362-S1N
		Red 5262-S1R	5362-S1R
		Lt Almond 5262-S1T	5362-S1T
		White 5262-S1W	5362-S1W
DECORA PLUS™	Color	15 Amp	20 Amp
	• Duplex Receptacle	Brown 16252-2P	16352-2P
	• Smooth Face	Blue 16252-2PB	16352-2PB
	• Two Outlets Marked "Controlled"	Black 16252-2PE	16352-2PE
	• Back and Side Wire	Gray 16252-2PG	16352-2PG
		Ivory 16252-2PI	16352-2PI
		Red 16252-2PR	16352-2PR
		Lt Almond 16252-2PT	16352-2PT
		White 16252-2PW	16352-2PW



Marked "Controlled" Receptacles

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty

2-Pole, 3-Wire • 125 Volt

Color



15 Amp



20 Amp

DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Two Outlets Marked "Controlled"
- Tamper-Resistant
- Back and Side Wire



Brown	TDR15-S2	TDR20-S2
Black	TDR15-S2E	TDR20-S2E
Gray	TDR15-S2G	TDR20-S2G
Ivory	TDR15-S2I	TDR20-S2I
Lt Almond	TDR15-S2T	TDR20-S2T
White	TDR15-S2W	TDR20-S2W

- Duplex Receptacle
- Smooth Face
- Split-Circuit, One Outlet Marked "Controlled"
- Back and Side Wire



Brown	16252-1P	16352-1P
Blue	16252-1PB	16352-1PB
Black	16252-1PE	16352-1PE
Gray	16252-1PG	16352-1PG
Ivory	16252-1PI	16352-1PI
Red	16252-1PR	16352-1PR
Lt Almond	16252-1PT	16352-1PT
White	16252-1PW	16352-1PW

- Duplex Receptacle
- Smooth Face
- Split-Circuit, One Outlet Marked "Controlled"
- Tamper-Resistant
- Back and Side Wire



Brown	TDR15-S1	TDR20-S1
Black	TDR15-S1E	TDR20-S1E
Gray	TDR15-S1G	TDR20-S1G
Ivory	TDR15-S1I	TDR20-S1I
Lt Almond	TDR15-S1T	TDR20-S1T
White	TDR15-S1W	TDR20-S1W

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt

Color



15 Amp



20 Amp

STANDARD

- Duplex Receptacle
- Smooth Face
- Two Outlets Marked "Controlled"
- Side Wire Only



Ivory	CR015-2PI	CR020-2PI
Lt Almond	CR015-2PT	CR020-2PT
White	CR015-2PW	CR020-2PW

- Duplex Receptacle
- Smooth Face
- Two Outlets Marked "Controlled"
- Tamper-Resistant
- Back and Side Wire



Brown	TBR15-S2	TBR20-S2
Black	TBR15-S2E	TBR20-S2E
Gray	TBR15-S2G	TBR20-S2G
Ivory	TBR15-S2I	TBR20-S2I
Lt Almond	TBR15-S2T	TBR20-S2T
White	TBR15-S2W	TBR20-S2W

- Duplex Receptacle
- Smooth Face
- Split-Circuit, One Outlet Marked "Controlled"
- Side Wire Only



Ivory	CR015-1PI	CR020-1PI
Lt Almond	CR015-1PT	CR020-1PT
White	CR015-1PW	CR020-1PW

- Duplex Receptacle
- Smooth Face
- Split-Circuit, One Outlet Marked "Controlled"
- Tamper-Resistant
- Back and Side Wire



Brown	TBR15-S1	TBR20-S1
Black	TBR15-S1E	TBR20-S1E
Gray	TBR15-S1G	TBR20-S1G
Ivory	TBR15-S1I	TBR20-S1I
Lt Almond	TBR15-S1T	TBR20-S1T
White	TBR15-S1W	TBR20-S1W



TDR20-S2W



TBR20-S1G



CR020-2PW

For Lev-lok Marked Controlled devices, please refer to Lev-lok section on page 16.

4-in-1™ Receptacles

Hospital Grade 4-in-1™ Receptacles provide a simple transition in retrofit applications to comply with new receptacle requirements in health care facilities. These devices allow you to increase the number of receptacles in your facility without having to pull new wires.

HOSPITAL GRADE Heavy-Duty		NEMA 5-15R 	NEMA 5-20R 
2-Pole, 3-Wire • 125 Volt	Color	15 Amp	20 Amp
- Quadruplex Receptacle - Side Wire Only	Brown	1254-H	21254-H
	Gray	—	21254-HGY
	Ivory	1254-HI	21254-HI
	Red	1254-HR	21254-HR
	White	1254-HW	21254-HW
- Quadruplex Receptacle - Isolated Ground - Side Wire Only 	Orange	1254-IG	21254-IG
	Ivory	—	21254-IGI
	White	—	21254-IGW
- Quadruplex Receptacle - Surge Protective - Indicator Light - Side Wire Only	Ivory	8480-I	8490-I
	Red	8480-R	8490-R
	White	8480-W	8490-W
- Quadruplex Receptacle - Surge Protective - Isolated Ground - Indicator Light - Side Wire Only 	Orange	—	8490-IG
	Blue	8480-IGB	8490-IGB
	Ivory	8480-IGI	8490-IGI
	White	8480-IGW	—
INDUSTRIAL SPECIFICATION GRADE Heavy-Duty		NEMA 5-15R 	NEMA 5-20R 
2-Pole, 3-Wire • 125 Volt	Color	15 Amp	20 Amp
- Quadruplex Receptacle - Side Wire Only	Brown	1254	21254
	Black	1254-E	21254-E
	Gray	1254-GY	21254-GY
	Ivory	1254-I	21254-I
	Red	1254-R	21254-R
	White	1254-W	21254-W
	Yellow	—	21254-Y
- Quadruplex Receptacle - Surge Protective - Indicator Light - Side Wire Only	Blue	5480-BU	5490-BU
	Gray	5480-GY	5490-GY
	Ivory	5480-I	5490-I
	Red	5480-R	—
	White	5480-W	5490-W
- Quadruplex Receptacle - Surge Protective - Isolated Ground - Indicator Light - Side Wire Only 	Orange	5480-IG	5490-IG
	Blue	—	5490-IGB
	Ivory	—	5490-IGI



21254-HI (Front)



21254-HI (Back)



3254-E

4254-Y

4-in-1 Receptacle Accessories To be used with Catalog No. 1254 and 21254 devices only

ADAPTER PLATES Required for 4-11/16" box or 2 single gang boxes.	Brown	3254	Orange	3254-OR	PORTABLE BOXES Encloses back of 4-in-1 devices so that they may be used as an outlet box.	Brown	—	Orange	4254-OR
	Blue	3254-BLU	Red	3254-R		Blue	—	Red	—
	Black	3254-E	White	3254-W		Black	4254-E	White	—
	Gray	3254-GY	Yellow	—		Gray	4254-GY	Yellow	4254-Y
	Ivory	3254-I				Ivory	4254-I		

USB Receptacles

HOSPITAL GRADE Heavy-Duty			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R	NEMA 5-20R
DECORA PLUS™	Color	15 Amp	20 Amp
- Duplex Receptacle - Two Type A USB Ports (3.6 Amp) - Smooth Face - Tamper-Resistant - Back and Side Wire	Brown	T5632-HG	T5832-HG
	Black	T5632-HGE	T5832-HE
	Gray	T5632-HGG	T5832-HGG
	Ivory	T5632-HGI	T5832-HGI
	Red	T5632-HGR	T5832-HGR
	Lt Almond	T5632-HGT	T5832-HGT
	White	T5632-HGW	T5832-HGW
- Duplex Receptacle - One Type A & One Type C USB Port (5.1 Amp) - Smooth Face - Tamper-Resistant - Back and Side Wire	Brown	T5633-HG	T5833-HG
	Black	T5633-HGE	T5833-HGE
	Gray	T5633-HGY	T5833-HGY
	Ivory	T5633-HGI	T5833-HGI
	Red	T5633-HGR	T5833-HGR
	Lt Almond	T5633-HGT	T5833-HGT
	White	T5633-HGW	T5833-HGW
RESIDENTIAL/COMMERCIAL SPECIFICATION GRADE			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R	NEMA 5-20R
DECORA®	Color	15 Amp	20 Amp
- Duplex Receptacle - Two Type A USB Ports (3.6 Amp) - Smooth Face - Tamper-Resistant - Back and Side Wire	Brown	T5632-B	T5832-B
	Black	T5632-E	T5832-E
	Gray	T5632-G	T5832-GY
	Ivory	T5632-I	T5832-I
	Red	T5632-R	T5832-R
	Lt Almond	T5632-T	T5832-T
	White	T5632-W	T5832-W
- Duplex Receptacle - One Type A & One Type C USB Port (5.1 Amp) - Smooth Face - Tamper-Resistant - Back and Side Wire	Brown	T5633	T5833
	Black	T5633-E	T5833-E
	Gray	T5633-GY	T5833-GY
	Ivory	T5633-I	T5833-I
	Lt Almond	T5633-T	T5833-T
	White	T5633-W	T5833-W
- Four Type A USB Ports (4.2 Amp) - Smooth Face - Back and Side Wire	Black	USB4P-E	
	Gray	USB4P-GY	
	Ivory	USB4P-I	
	Lt Almond	USB4P-T	
	White	USB4P-W	



Combination Straight & Locking Blade Receptacles

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R	NEMA L5-15R
COMBO	Feed	Color	15 Amp
- Duplex Receptacle - Smooth Face - Back and Side Wire	Common Feed	Black	4792
	2 Hot, 1 Neutral Return	Black	4794-1R
	2 Hot, 2 Neutral Returns	Black	4795-2R

Clock Hanger & Display Receptacles

COMMERCIAL SPECIFICATION GRADE			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R 	NEMA 5-20R 
	Color	15 Amp	20 Amp
CLOCK-HANGER	• Recessed Single Receptacle with Hook on Wallplate	Ivory T5015-CHI	T5020-CHI
	• Smooth Face	White T5015-CHW	T5020-CHW
	• Tamper-Resistant	Stainless T5261-CH	T5361-CH
	• Back and Side Wire	Steel	
DISPLAY	• Recessed Single Receptacle with Wallplate Featuring Removable Receptacle Cover	Brass T5250-B	T5350-B
	• Smooth Face		
	• Tamper-Resistant		
	• Back and Side Wire		



T5361-CH

Short Strap Receptacles

COMMERCIAL SPECIFICATION GRADE			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R 	NEMA 5-20R 
	Color	15 Amp	20 Amp
SHORT STRAP	• Single Receptacle	Black 5284-SS	5558-SS
	• Smooth Face		
	• Side Wire Only		
	• Single Receptacle	Black 5258-SS	—
4" CVR.	• Tapped Mounting Holes		
	• Smooth Face		
	• Side Wire Only		
	• Mounted to Round 4" Cover	Black 5059 (Single)	—
4" CVR.	• Smooth Face		
	• Side Wire Only	Black 5042 (Duplex)	—



5558-SS

COMMERCIAL SPECIFICATION GRADE			
2-Pole, 3-Wire • 250 Volt		NEMA 6-15R 	NEMA 6-20R 
	Color	15 Amp	20 Amp
SH. STRAP	• Single Receptacle	Black 5658-SS	5458-SS
	• Smooth Face		
	• Side Wire Only		



5825-W

Universal (Europlug)

COMMERCIAL SPECIFICATION GRADE			
2-Pole, 3-Wire • 125/250 Volt		NEMA 5-15R 	CEE 7/16 
	Color	15 Amp	16 Amp
DECORA PLUS™	• Straight Blade and Europlug Duplex Receptacle	Black 5825-E	5835-E
	• Smooth Face	Ivory 5825-I	5835-I
	• Back and Side Wire	Lt Almond 5825-T	5835-T
		White 5825-W	5835-W



SOLUTIONS FOR...



Health Care



Food & Beverage



Education



Temporary Power



Oil & Gas



Manufacturing



Entertainment



Commercial Properties



Office Buildings

...AND MUCH MORE!

Visit our Website at:
leviton.com/receptaclegrades
email: commercial@leviton.com

Q-1101B

080719

Leviton Manufacturing Co., Inc.
201 N Service Rd, Melville, NY 11747
Telephone: 1-800-323-8920 • FAX: 1-800-832-9538
Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

© 2019 Leviton Manufacturing Co., Inc. All rights reserved.
NEC® is a registered trademark of the National Fire Protection Association, Quincy, MA 02169

