


Features and Benefits

Heavy Duty Commercial Standard GFCI Receptacles

- Patented AUTOGUARD® self test technology includes disconnecting power to the receptacle if critical components are damaged and GFCI protection is lost
- Internal back wiring clamp and guide for quick and secure termination
- Night light option includes light sensor controls for automatic ON and OFF, custom dual lens for optimum light output

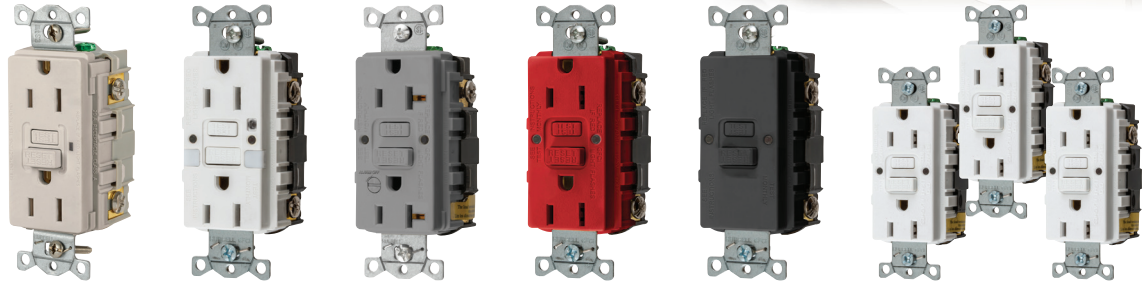

Standard

Rating	Color	Standard	Night Light	Two LED Night Lights	Alarm	Assembled in USA	Blank Face Available in 20A Only	Standard 3-Pack Three Devices per Pack
	Black	GFR15BLK	GFRST15BKNL	GFRST15BKB	GFRST15BKU	—	—	—
	Brown	GFR15	GFRST15NL	GFRST15B	GFRST15U	—	—	—
	Gray	GFR15GRY	GFRST15GYNL	GFRST15GYB	GFRST15GYU	—	—	—
	Ivory	GFR15I	GFRST15INL	GFRST15IB	GFRST15IU	—	—	GFRST15I3
	Light Almond	GFR15LA	GFRST15LANL	GFRST15LAB	GFRST15LAU	—	—	GFRST15LA3
	Red	GFR15R	GFRST15RNL	GFRST15RB	GFRST15RU	—	—	—
	White	GFR15W	GFRST15WNL	GFRST15WB	GFRST15WU	—	—	GFRST15W3
	Black	GFR20BLK	GFRST20BKNL	GFRST20BKB	GFRST20BKU	GFBFST20BK	—	—
	Brown	GFR20	GFRST20NL	GFRST20B	GFRST20U	GFBFST20	—	—
	Gray	GFR20GRY	GFRST20GYNL	GFRST20GYB	GFRST20GYU	GFBFST20GY	—	—
	Ivory	GFR20I	GFRST20INL	GFRST20IB	GFRST20IU	GFBFST20I	GFRST20I3	—
	Light Almond	GFR20LA	GFRST20LANL	GFRST20LAB	GFRST20LAU	GFBFST20LA	GFRST20LA3	—
	Red	GFR20R	GFRST20RNL	GFRST20RB	GFRST20RU	GFBFST20R	—	—
	White	GFR20W	GFRST20WNL	GFRST20WB	GFRST20WU	GFBFST20W	GFRST20W3	—



Standard SNAPConnect®

Rating	Color	Standard	Assembled in USA
	Black	SNAPGF15BLK	GFRST15SNAPBKNA
	Brown	SNAPGF15	GFRST15SNAPNA
	Gray	SNAPGF15GRY	GFRST15SNAPGYNA
	Ivory	SNAPGF15I	GFRST15SNAPINA
	Light Almond	SNAPGF15LA	GFRST15SNAPLANA
	Red	SNAPGF15R	GFRST15SNAPRNA
	White	SNAPGF15W	GFRST15SNAPWNA
	Black	SNAPGF20BLK	GFRST20SNAPBKNA
	Brown	SNAPGF20	GFRST20SNAPNA
	Gray	SNAPGF20GRY	GFRST20SNAPGYNA
	Ivory	SNAPGF20I	GFRST20SNAPINA
	Light Almond	SNAPGF20LA	GFRST20SNAPLANA
Red	SNAPGF20R	GFRST20SNAPRNA	
White	SNAPGF20W	GFRST20SNAPWNA	

SNAPConnect® Right Angle Pigtailed Terminal

Description	Type	Catalog Number
Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material.	Solid	SNAP1RA
	Stranded	SNAP2RA
Same as above. Assembled in USA.	Solid	SNAP1RNA
	Stranded	SNAP2RNA
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material with WAGO terminals.	Solid	SNAP1RAM2
	Stranded	SNAP2RAM2
Same as above. Assembled in USA.	Solid	SNAP1RNAM2
	Stranded	SNAP2RNAM2

Note: GFCI type receptacles should not be used in critical care patient areas or for electrical life support equipment applications because of the possibility of power interruption. All GFCI receptacles are furnished with a matching color thermoplastic wallplate, 20 amp feed-through capability.