



LED Lamps - Directional



SpectraChoice™ RS Can Downlights

Current's SpectraChoice™ Selectable RS Can Downlights are the perfect solution to give an updated look to ceilings with recessed lighting. Make color temperature selections easily at any time with integrated switch, no tools required.



SpectraChoice

PERFORMANCE HIGHLIGHTS:

Selectable RS Cans	
Light Output Range:	700 (4"), 700 & 1100 (6") Lumens
CRI:	90
Selectable CCT:	2700K, 3000K, 4000K & 5000K
Input Voltage:	120
Efficiency:	Up to 91 LPW
Wattage:	8W (4"), 8W & 12W (6")
Life:	50,000 hours L70
Temperature Rating:	-20°C to 40°C
Location Rating:	Damp

LIMITED WARRANTY

5 years



Select color temperature using built-in switch.

FEATURES:

- Select color temperature with built-in switch, no tool required
- CEC Title 24-JA8 compliant
- These lamps are energy efficient, contain no lead or mercury, and are compliant with material restriction requirements of RoHS

BENEFITS:

- A replacement lamp using 8 watts of energy and producing 700 lumens can save over \$313 in energy costs over the rated life of the lamp vs. a standard 700 lumen, 65-watt incandescent BR30 based on \$0.11 per kWh
- Use the integrated switch to match the color of lighting across the facility or choose to change the aesthetic of a space
- One lamp can replace many, greatly reducing inventory
- Use one lamp for applications requiring different CCTs, simplifying project management by streamlining BOMs

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.



Selectable **LED Lamps**

Do more with less.

- *Reduce Inventory*
- *Simplify Projects*
- *Optimize Solutions*



LED Lamps - Directional

SpectraChoice™ RS Can Downlights


CUSTOMER NAME _____

PROJECT NAME _____

DATE _____

NOTES _____

Selectable SpectraChoice™ RS Cans

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Carton Qty ²	MOL (In)	Lumens (Initial)	Selectable Color Temperature*	CRI	Wattage Replacement	Rated Life L70 (Hrs) ¹	Dimmable	Location Rating ³	Additional Information
Selectable RS Cans															
	E26	8	93162554	LED8DRS4/9SC-4PK	120	16	2.4	700	2700/3000/4000/5000K	90	65	50,000	Yes	Damp	4" Can, Pigtail, Title 24-JA8, 4 pack
	E26	8	93162555	LED8DRS6/9SC-4PK	120	16	2.8	700	2700/3000/4000/5000K	90	65	50,000	Yes	Damp	6" Can, Pigtail, Title 24-JA8, 4 pack
	E26	12	93162556	LED12DRS6/9SC-4PK	120	16	2.8	1100	2700/3000/4000/5000K	90	90	50,000	Yes	Damp	6" Can, Pigtail, Title 24-JA8, 4 pack

Information provided is subject to change without notice. Please verify all details with Current. All values are design or typical values when measured under laboratory conditions, and Current makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

¹ The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

² Minimum order quantity from Current = Carton Qty; Smaller unit of sale pack inside carton

³ UL 1993 Environmental Requirements for LED LAMPS

Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations

* Default color temperature setting is 3000K.




E26 base pigtail with quick disconnect and mounting clips included.




Optional torsion springs provided with 6-inch models.


LED8DRS4/9SC Polar Plot

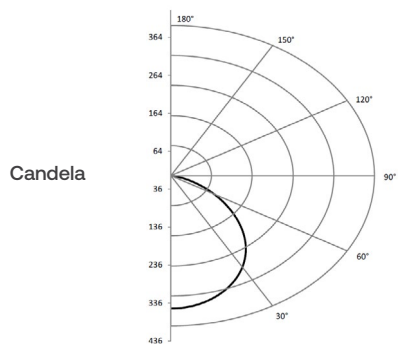

LED8DRS6/9SC Polar Plot

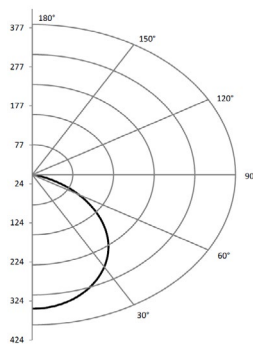

LED12DRS6/9SC Polar Plot

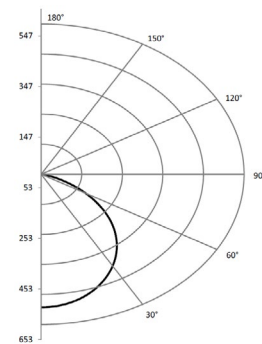

Go to www.LED.com to learn more about Current's family of Selectable LED Lamps.



Selectable **LED Lamps**