



LED MR16

7MR16/LED/827/F35/DIM 12V 10/1FB

Philips LED MR-16 lamps with single optic technology provide the look and color quality of traditional halogens while using a fraction of the energy. A perfect fit for spot lighting, they are compatible with most existing fixtures with MR16 GU5.3 holders and are designed as a retrofit replacement for halogen or incandescent spots.

Product data

General Information	
Cap-Base	GU5.3
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	35 degree(s)
Luminous Flux	515 lm
Luminous Intensity (Nom)	1,350 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	73.00 lm/W
Color Consistency	<4
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	- Hz
Input Frequency	- Hz

Power Consumption	7 W	
Lamp Current (Nom)	650 mA	
Wattage Equivalent	50 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.7	
Voltage (Nom)	ac electronic 12 V	
Temperature		
T-Case Maximum (Nom)	90 °C	
Controls and Dimming		
Dimmable	Only with specific dimmers	
Mechanical and Housing		
Bulb Finish	Clear	
Bulb Material	Aluminum	
Bulb Shape	MR16	
UL Wet/ damp/ dry location	Damp location	
Approval and Application		
Suitable For Accent Lighting	Yes	


Datasheet, 2024, January 29 data subject to change

LED MR16

Energy Certifications	Energy Star	
T20 compliant	No	
Application Conditions		
can it be used in closed luminaires	Yes	
Product Data		
Order product name	7MR16/LED/827/F35/DIM 12V 10/1FB	
Full product name	7MR16/LED/827/F35/DIM 12V 10/1FB	


Order code	929003076404
Material Nr. (12NC)	929003076404
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677573881
Numerator - Packs per outer box	10
EAN/UPC - Case	50046677573886


Dimensional drawing




Product	D	С
7MR16/LED/827/F35/DIM 12V 10/1FB	50 mm	46.5 mm

Photometric data



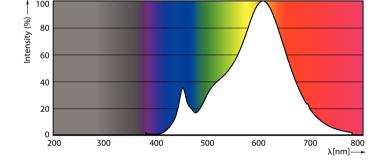

Accent Lighting Spots - 7MR16/LED/827/F35/DIM 12V 10/1FB




Light Distribution Diagram - 7MR16/LED/827/F35/DIM 12V 10/1FB


Spectral Power Distribution Colour - 7MR16/LED/827/F35/DIM 12V 10/1FB

100

LED MR16

Lifetime

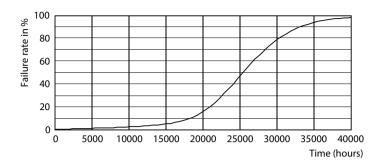

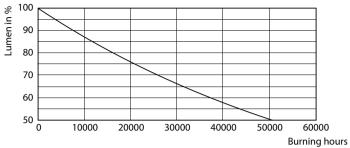

Life Expectancy Diagram - 7MR16/LED/827/F35/DIM 12V 10/1FB

Lumen Maintenance Diagram - 7MR16/LED/827/F35/DIM 12V 10/1FB

