



200A
600V AC/250V DC



200A 600V AC/250V DC, 50-400 Hertz Pin and Sleeve Devices

Description

Gray metallic, watertight boatside power inlet with wingnut-secured lid for water tightness when not in use.

Gray/yellow metallic, watertight boatside connector body with locking ring to make inlet/connector body interface watertight. Cord grip range is #1 AWG-250 MCM 1.00-2.50 in. (25.4-63.5).

Gray/yellow metallic, watertight dockside plug with locking ring to make plug/receptacle interface watertight. Cord grip range is #1 AWG-250 MCM 1.00-2.50 in. (25.4-63.5).

Gray metallic, watertight dockside receptacle with wing nut-secured lid for water tightness when not in use.

Gray/yellow metallic, watertight dockside connector body with wing nut-secured lid for water tightness when not in use. For making plug/connector body interface on extension cords or adapters.

Catalog Number

M5200BS1R

M5200CS1R

M5200PS1

M5200RS1

M5200CS1

200A Back Boxes

Description

Gray metallic back box for inlets and receptacles has 45° angle section which can be installed in any of 4 positions, 2 in. NPT hub.






Gray metallic back box – same as above, but with 2-1/2 in. NPT hub.

Catalog Number

MB2003W

MB2004W

Product Dimensions

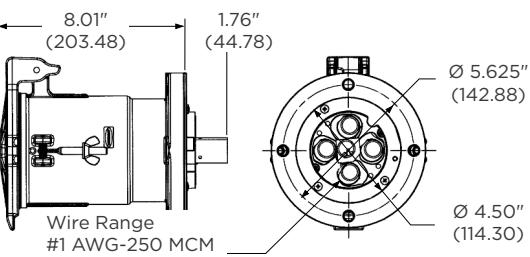

Dimensions in Inches (mm)