


# STRAIGHT BLADE DEVICES USB Charger Receptacles and Outlets

**B**  
SECTION



## Weather Resistant Receptacle Features

- Meets Section 406.9 of NEC®
- 5 Amp, 5 Volt USB output
- Type A&C USB ports
- Power indicating green LED light



## Weather Resistant USB Charger Duplex Receptacles

| Description                                                                                                                                                                            | Color                                                    | 15A 125V                                                                                 | 20A 125V                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Type A&C USB Charger Receptacle, One Type A and one Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant USB ports rated 10,000 cycles; Commercial Grade. | Black<br>Brown<br>Gray<br>Ivory<br>Light Almond<br>White | USB15AC5BKWR<br>USB15AC5WR<br>USB15AC5GYWR<br>USB15AC5IWR<br>USB15AC5LAWR<br>USB15AC5WWR | USB20AC5BKWR<br>USB20AC5WR<br>USB20AC5GYWR<br>USB20AC5IWR<br>USB20AC5LAWR<br>USB20AC5WWR |



Note: Outdoor circuits should be GFCI protected per national and local electric codes.

## Commercial and Hospital Grade ● USB-C Power Delivery Charger Tamper-Resistant Duplex Receptacles

| Description                                                                                                                                                                                                                                      | Color                                                         | Commercial                                                                              |                                                                                         | Hospital Grade                                                                                                 |                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                  |                                                               | 15A 125V                                                                                | 20A 125V                                                                                | 15A 125V                                                                                                       | 20A 125V                                                                                                |
| Two Type-C port configurations, one USB-C Power Delivery port with up to 55 Watt output and one USB Type-C convenience port with up to 1.5 Amp, 5 Volt USB output, Tamper Resistant duplex receptacle, USB ports rated 10,000 cycles.            | Black<br>Brown<br>Gray<br>Ivory<br>Lt. Almond<br>Red<br>White | USB15CPDBK<br>USB15CPD<br>USB15CPDGY<br>USB15CPDI<br>USB15CPDLA<br>—<br>USB15CPDW       | USB20CPDBK<br>USB20CPD<br>USB20CPDGY<br>USB20CPDI<br>USB20CPDLA<br>—<br>USB20CPDW       | USB8200CPDBK<br>USB8200CPD<br>USB8200CPDGY<br>USB8200CPDI<br>USB8200CPDLA<br>—<br>USB8200CPDW                  | USB8200CPDBK<br>USB8200CPD<br>USB8200CPDGY<br>USB8200CPDI<br>USB8200CPDLA<br>USB8300CPDR<br>USB8200CPDW |
| One Type-A and one Type-C port configurations, one USB-C Power Delivery port with up to 55 Watt output and one USB-A convenience port with up to 1.5 Amp, 5 Volt USB output, Tamper Resistant duplex receptacles, USB ports rated 10,000 cycles. | Black<br>Brown<br>Gray<br>Ivory<br>Lt. Almond<br>Red<br>White | USB15ACPDBK<br>USB15ACPD<br>USB15ACPDGY<br>USB15ACPDI<br>USB15ACPDLA<br>—<br>USB15ACPDW | USB20ACPDBK<br>USB20ACPD<br>USB20ACPDGY<br>USB20ACPDI<br>USB20ACPDLA<br>—<br>USB20ACPDW | USB8200ACPDBK<br>USB8200ACPD<br>USB8200ACPDGY<br>USB8200ACPDI<br>USB8200ACPDLA<br>USB8200ACPDR<br>USB8200ACPDW | USB8300CPDBK<br>USB8300CPD<br>USB8300CPDGY<br>USB8300CPDI<br>USB8300CPDLA<br>USB8300CPDR<br>USB8300CPDW |

Note: See page Tech-10 for Tamper-Resistant description.

## 4 Port USB Charger Outlets

| Description                                                                                                    | Color                                                    | Catalog Number                                                   |
|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------------|
| USB Charger Outlets, 4 USB ports, two Type A & two Type-C ports, 5 Amp up to 9 Volt DC, Style Line® decorator. | Black<br>Brown<br>Gray<br>Ivory<br>Light Almond<br>White | USB4ACBK<br>USB4AC<br>USB4ACGY<br>USB4ACI<br>USB4ACLA<br>USB4ACW |




## Switch Combo Outlets


| Description                                                                            | Color                                                    | Catalog Number                                                   |
|----------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------------|
| Switch Combo Outlet, two USB Type 2.0 ports, 2.1 Amp, 5 Volt DC, Style Line decorator. | Black<br>Brown<br>Gray<br>Ivory<br>Light Almond<br>White | USB102BK<br>USB102<br>USB102GY<br>USB102I<br>USB102LA<br>USB102W |




NEC is a registered trademark of the National Fire Protection Association (NFPA).

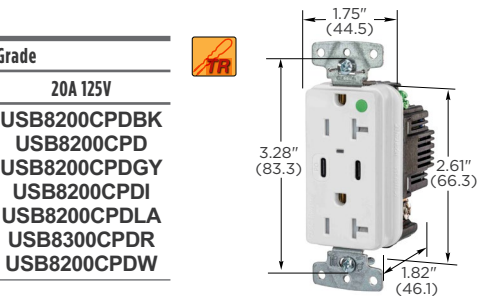


USB8300CPDW

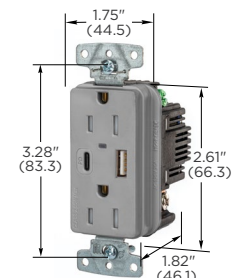

USB15ACPDGY

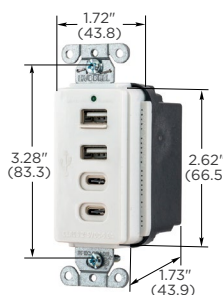

USB4W

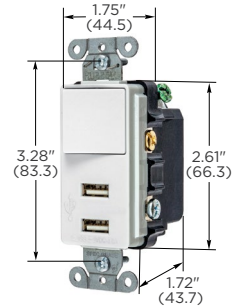

USB102W

Dimensions in Inches (mm)