



# DUAL BEAM BRILLIANCE! GARAGE/CANOOPY

PERFOR-  
MANCE  
CLASS

## SIMPLIFYING YOUR WORK

- DUAL BEAM: one product seamlessly meets Garage and Canopy Optics requirements — no switches or lens swap needed.
- DUAL SELECTABLE: Three wattages and three CCTs in the same luminaire.
- CONTROLS READY: sensor receptacle for field installable standalone and LEDVANCE LINK™ sensors, no wiring required. LLLC listed at DLC.



## GARAGE/CANOPY (ROUND) ORDERING GUIDE

GARAG	P	SXXX	UNH	D	8	SC2	R	12	WH	P
PRODUCT NAME	SEGMENTATION	WATTAGE	VOLTAGE	DIMMING	CRI	COLOR TEMPERATURE	SHAPE	SIZE	COLOR/ FINISH	OPTIONS
GARAG = Garage Luminaire	P = Performance Class	S025 = 15/20/25W S050 = 35/40/50W S100 = 75/90/100W	UNH = 120-347V	D = 0-10V Dimmable	8 = >80	SC2 = 3000/ 4000/5000K	R = Round	12 = 12" Diameter	WH = White	P = Photocell E = EMBB

## CANOPY/GARAGE (SQUARE) ORDERING GUIDE

CANOPY	P	SXXX	UNH	D	8	SC2	S	XX	XX	P
PRODUCT NAME	SEGMENTATION	WATTAGE	VOLTAGE	DIMMING	CRI	COLOR TEMPERATURE	SHAPE	SIZE	COLOR/ FINISH	OPTIONS
CANOPY = Canopy Luminaire	P = Performance Class	S030 = 15/20/30W S050 = 30/40/50W S060 = 40/50/60W S100 = 60/75/100W	UNH = 120-347V	D = 0-10V Dimmable	8 = >80	SC2 = 3000/ 4000/5000K	S = Square	8 = 8" diameter 10 = 10" diameter	WH = White BZ = Bronze	P = Photocell E = EMBB

## FEATURES

### INTEGRATED PHOTOCELL

Can be disabled via On/Off switch.

### WATTAGE/CCT SELECTABLE

inventory reduction & greater job site flexibility.





### OPTIONAL EMBB

### EMBEDDED UPLIGHT

that reduces the "cave effect".

### DUAL™ BEAM

A single product is suitable for use in both canopy and garage applications

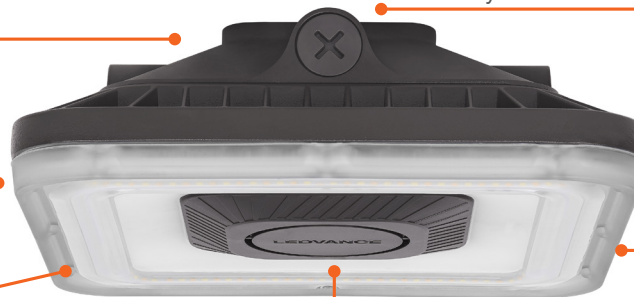

CONTROLS  
READY



Sensor receptacle for screw-in standalone or LEDVANCE LINK sensors.



Round  
Spec Sheet



Round  
Install Guide



Square  
Spec Sheet



Square  
Install Guide