

RAB®

FXLED



The FlexFlood just got more flexible!

Now available in additional beam angles.

The most flexible FlexFlood ever.

The FXLED just got an upgrade that maximizes versatility both on the shelf and in the field: 3 sizes, 11 wattages, 2 mounting options, and 2 CCTs.

 <p>XS</p> <p>5000K CCT 40W 4000K CCT 60W 80W</p>	 <p>S</p> <p>5000K CCT 69W 97W 4000K CCT 132W 168W</p>	 <p>M</p> <p>5000K CCT 213W 4000K CCT 346W</p>	 <p>L</p> <p>5000K CCT 445W 4000K CCT 534W</p>
--	--	---	--



100,000-HOUR LED LIFESPAN



480V OPTIONAL



IP66 RATED




10-YEAR, NO-COMPROMISE WARRANTY

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty



Optics options put the light where you need it.

Standard models come with either a 6H x 6V (XS & S) or 7H x 6V (M & L) distribution, but the medium and large models are now also available with either 3H x 3V or 5H x 5V NEMA types, giving you added flexibility with your outdoor applications!

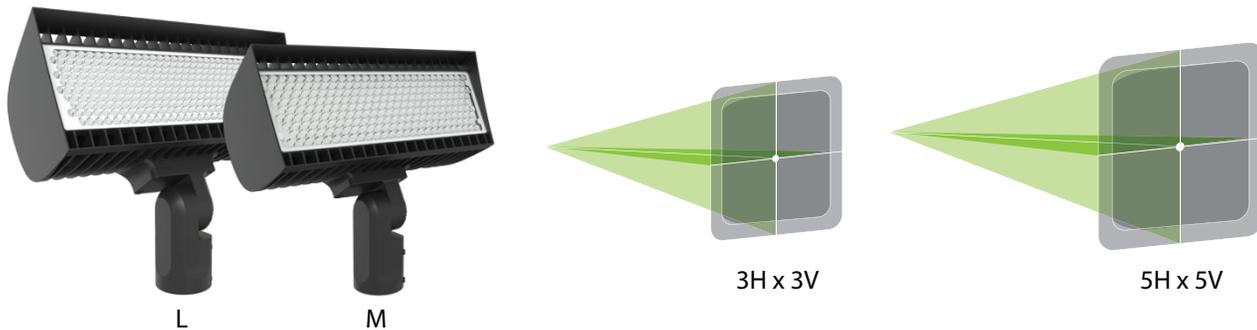


Smaller size means smaller carbon footprint.

The new FXLED is far lighter and smaller than our original series—less than half the size! It also weighs significantly less, making it a much more sustainable, eco-friendly product. Less materials, less packaging, less energy to manufacture, less cargo space, less fuel to transport...it all adds up!



Ultra efficient.

With a super-high efficacy of up to 152 lm/W, the FXLED can save up to 75% in energy costs.

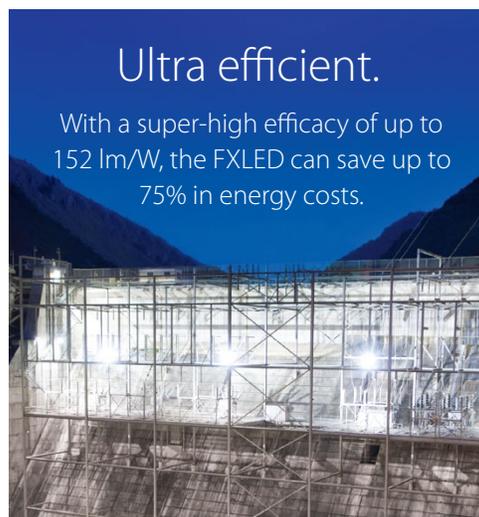

Stay in control.

The FXLED is available with a 7-pin receptacle that's perfect for use with RAB's standard twistlock photocell or our smart, Lightcloud-enabled twistlock photocell:

Standard Twistlock (120-277V): **R-3P-PCT**

Standard Twistlock (480V): **R-3P-PCT**

Lightcloud-Enabled Twistlock*: **LCTWIST/K**

*120-277V; requires Lightcloud Gateway or Hub



Ordering Matrix

Product Family	Wattage	NEMA Type	Color Temp	Mounting	Finish	Driver	Options
FXLED							
XS	80/60/40W	Blank	6HX6V (XS&S) or 7HX6V (M&L)	Blank	4000/5000K Selectable	SF Slipfitter	Blank
S	168/132/97/69W			T Trunnion	W	Bronze White	Blank
M	346/213W	B33	3HX3V*			Blank	120-277V, 0-10V Dimming
L	534/445W	B55	5HX5V*			/480	480V, 0-10V Dimming
							Blank /7PR No Option 7-Pin Receptacle

* Available on M and L sizes only