

Lockwing



Utility Gas Ball Valve, Full Port, Meter Nut, Swivel Connection, Service Bypass, 125 PSIG



125-LWBP-S

Features

- 20LT or 30LT
- Tamper Resistant Lockwing Cap
- 2 FKM O-Rings
- Meter Nut and Swivel Connects Directly to Meter
- Lockwing Accommodates Standard Barrel Locks
- Maintenance Free Design
- Patented Security Shutter and Lockwing Tab
- US Patent No. 6,648,009
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty

Approvals

- CSA Certified
 - CGA 3.16 (125G)
 - ANSI B16.33 (125G)
- Meets or exceeds applicable part of DOT 192
- MSS SP-110



Pressure Rating

- 125 PSIG
- Temp range: -40°F to 300°F



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov.

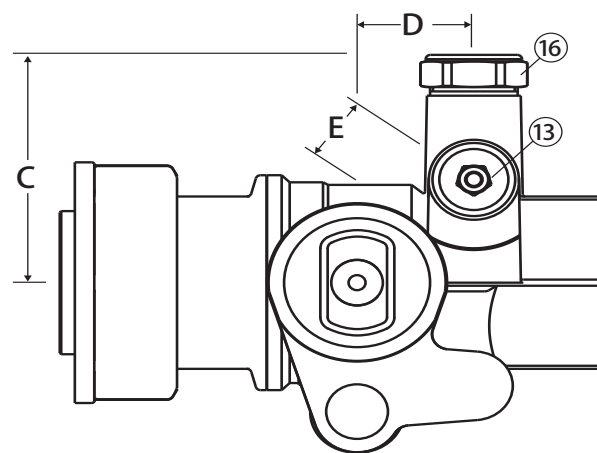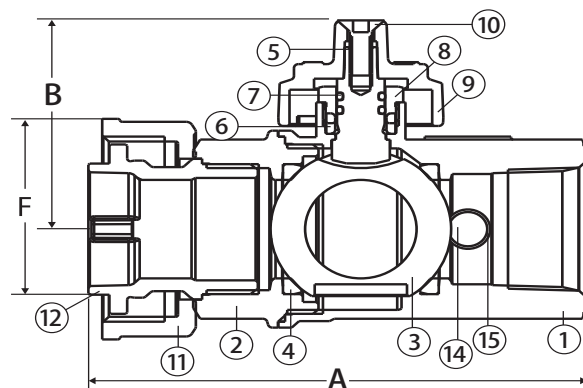

Material Specifications

| No. | Part | Materials |
|-----|------------------|------------------------------|
| 1 | Body | Brass - C37700 |
| 2 | End Connection | Brass - C37700 |
| 3 | Ball | Chrome Plated Brass - C37700 |
| 4 | Seat (2) | PTFE G300 |
| 5 | Stem | Brass - C38500 |
| 6 | Packing | Buna-N |
| 7 | Stem O-ring (2) | FKM |
| 8 | Packing Gland | Brass - C38500 |
| 9 | Lockwing Cap | Brass - C37700 |
| 10 | Screw | 304 Stainless Steel |
| 11 | Union Nut | Brass - C37700 |
| 12 | Tail Piece | Brass - C37700 |
| 13 | Bypass Plug | Brass - C38500 |
| 14 | Bypass Set Screw | Brass - C38500 |
| 15 | Bypass O-ring | Viton® |
| 16 | Bypass Cap | Brass - C38500 |

Dimensions

| Part No. | Size | A | B | C | D | E | F |
|----------|--------|------|------|------|------|------|------|
| 245-005B | 1"20LT | 4.21 | 2.09 | 2.09 | 0.94 | 0.59 | 20LT |
| 245-105B | 1"30LT | 4.21 | 2.09 | 2.09 | 0.94 | 0.59 | 30LT |

