

Push-in Terminal Blocks Specifications

Bulletin Number 1492-P

Topic	Page
Summary of Changes	1
Single-level, Feed-through Terminal Blocks	2
Single-level, Feed-through Grounding Terminal Blocks	25
Double-level, Feed-through Terminal Blocks	43
Three-level, Feed-through Terminal Blocks	59
Three-level, Feed-through Grounding Terminal Blocks	61
Four-level Feed-through Terminal Blocks	63
Disconnect Terminal Blocks	64
Sensor Terminal Blocks	72
Control Power Distribution Terminal Blocks	77
Single-level Flex Plug-in Terminal Blocks	109
Accessory Plug-in Terminal Blocks	120
Fuse Terminal Blocks	125
Ferrule Selection	129
Additional Resources	135


Summary of Changes

This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes.

Topic	Page
Added new terminal blocks specifications for 1492-P95/120	23
Added new terminal blocks specifications for 1492-P95/120-B	23
Added new terminal blocks specifications for 1492-P95/120DM	24
Added new terminal blocks specifications for 1492-PG95/120	42
Added new terminal blocks specifications for 1492-P6PD/6X2-B	85
Added new terminal blocks specifications for 1492-P6PD/6X2-RE	86
Added new terminal blocks specifications for 1492-PG6PD/6X2	87
Added new terminal blocks specifications for 1492-P10PD/4X3-B	93
Added new terminal blocks specifications for 1492-P10PD/4X3-RE	94
Added new terminal blocks specifications for 1492-PG10PD/4X3	95
Added new terminal blocks specifications for 1492-PDA4	123
Added new terminal blocks specifications for 1492-PDAG4	124
Added Center Jumper, Auxiliary Connection, and Connection Element for Accessories	Throughout

Single-level, Feed-through Terminal Blocks

1492-P2

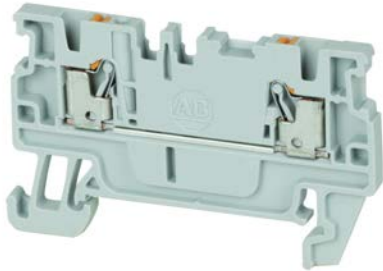

Terminal Blocks—Dimensions (W x H x L): 3.5 x 33.5 x 55 mm							
Color		Cat. No.	Pkg. Qty.	Color		Cat. No.	Pkg. Qty.
	Gray	1492-P2	100		Green	1492-P2-G	100
	Red	1492-P2-RE	100		Yellow	1492-P2-Y	100
	Blue	1492-P2-B	100		Orange	1492-P2-OR	100
	Black	1492-P2-BL	100		White	1492-P2-W	100
	Brown	1492-P2-BR	100				

Specifications — Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Maximum Current	13 A	17.5 A	15 A
Wire Range/ Rated Cross Section	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP2	50
	Blue	1492-EBP2-B	50
	Yellow	1492-EBP2-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP2-2	60
3-pole		1492-CJP2-3	20
4-pole		1492-CJP2-4	
5-pole		1492-CJP2-5	
6-pole		1492-CJP2-6	
7-pole		1492-CJP2-7	
8-pole		1492-CJP2-8	
9-pole		1492-CJP2-9	
10-pole		1492-CJP2-10	
20-pole		1492-CJP2-20	
50-pole		1492-CJP2-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50
Marking Systems			
ClearMark™ Advanced and ClearPlot® Basic Marker Cards		1492-MR3x10 (192/card)	5 cards
ClearMultiprint™ Markers		1492-MT3X8 (1000/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP2-2-RE.

Wiring Diagram



IMPORTANT See page 129 for ferrule selection.

1492-P2T



Terminal Blocks—Dimensions (W x H x L): 3.5 x 33.5 x 61.5 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-P2T	50	Green	1492-P2T-G	50
Red	1492-P2T-RE	50	Yellow	1492-P2T-Y	50
Blue	1492-P2T-B	50	Orange	1492-P2T-OR	50
Black	1492-P2T-BL	50	White	1492-P2T-W	50
Brown	1492-P2T-BR	50			

Specifications – Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Maximum Current	13 A	17.5 A	15 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP2T	50
	Blue	1492-EBP2T-B	50
	Yellow	1492-EBP2T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP2-2	60
3-pole		1492-CJP2-3	20
4-pole		1492-CJP2-4	
5-pole		1492-CJP2-5	
6-pole		1492-CJP2-6	
7-pole		1492-CJP2-7	
8-pole		1492-CJP2-8	
9-pole		1492-CJP2-9	
10-pole		1492-CJP2-10	
20-pole		1492-CJP2-20	
50-pole		1492-CJP2-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR3x10 (192/card)	5 cards
ClearMultiprint Markers		1492-MT3X8 (1000/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP2-2-RE.

Wiring Diagram



IMPORTANT See page [129](#) for ferrule selection.

1492-P2Q



Terminal Blocks—Dimensions (W x H x L): 3.5 x 33.5 x 67.5 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-P2Q	100	 Green	1492-P2Q-G	100
 Red	1492-P2Q-RE	100	 Yellow	1492-P2Q-Y	100
 Blue	1492-P2Q-B	100	 Orange	1492-P2Q-OR	100
 Black	1492-P2Q-BL	100	 White	1492-P2Q-W	100
 Brown	1492-P2Q-BR	100			


Specifications — Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Maximum Current	13 A	17.5 A	15 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP2Q	50
	Blue	1492-EBP2Q-B	50
	Yellow	1492-EBP2Q-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.	
Center Jumpers ⁽¹⁾			
2-pole	1492-CJP2-2	60	
3-pole	1492-CJP2-3	20	
4-pole	1492-CJP2-4		
5-pole	1492-CJP2-5		
6-pole	1492-CJP2-6		
7-pole	1492-CJP2-7		
8-pole	1492-CJP2-8		
9-pole	1492-CJP2-9		
10-pole	1492-CJP2-10		
20-pole	1492-CJP2-20		
50-pole	1492-CJP2-50		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR3x10 (192/card)	5 cards	
ClearMultiprint Markers	1492-MT3X8 (1000/roll)	1 roll	

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP2-2-RE.

Wiring Diagram



IMPORTANT See page 130 for ferrule selection.

1492-P3



Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 55 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-P3	100	Green	1492-P3-G	100
Red	1492-P3-RE	100	Yellow	1492-P3-Y	100
Blue	1492-P3-B	100	Orange	1492-P3-OR	100
Black	1492-P3-BL	100	White	1492-P3-W	100
Brown	1492-P3-BR	100			

Specifications – Single-level Feed-through Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	21 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg.
Mounting Rails, End Barriers, End Anchors and Retainers		
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1
	Aluminum	1492-DR5
	Hi-Rise (Aluminum)	1492-DR6
	Angled (Steel)	1492-DR7
End Barriers	Gray	1492-EBP3
	Blue	1492-EBP3-B
	Yellow	1492-EBP3-Y
End Retainer	1492-ERL35	20
	1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35
	Heavy Duty	1492-EAHJ35
	Normal Duty	1492-EAP35

Accessories		Cat. No.	Pkg.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole	1492-CJP3-50		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See page [130](#) for ferrule selection.

1492-P3T



Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 66.5 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-P3T	100	Green	1492-P3T-G	100
Red	1492-P3T-RE	100	Yellow	1492-P3T-Y	100
Blue	1492-P3T-B	100	Orange	1492-P3T-OR	100
Black	1492-P3T-BL	100	White	1492-P3T-W	100
Brown	1492-P3T-BR	100			

Specifications – Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	21 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP3T	50
	Blue	1492-EBP3T-B	50
	Yellow	1492-EBP3T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE

Wiring Diagram



IMPORTANT See page [130](#) for ferrule selection.

1492-P3Q

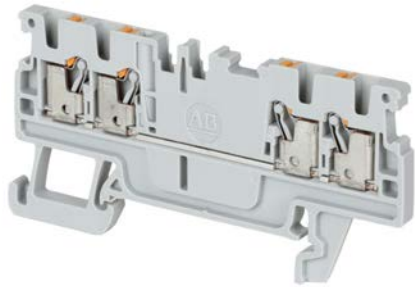

Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 77.5 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-P3Q	100	Green	1492-P3Q-G	100
Red	1492-P3Q-RE	100	Yellow	1492-P3Q-Y	100
Blue	1492-P3Q-B	100	Orange	1492-P3Q-OR	100
Black	1492-P3Q-BL	100	White	1492-P3Q-W	100
Brown	1492-P3Q-BR	100			


Specifications – Single-level Feed-through Terminal Block			
Certifications	UL / CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	21 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP3Q	50
	Blue	1492-EBP3Q-B	50
	Yellow	1492-EBP3Q-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole	1492-CJP3-50		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See page [130](#) for ferrule selection.

1492-P4

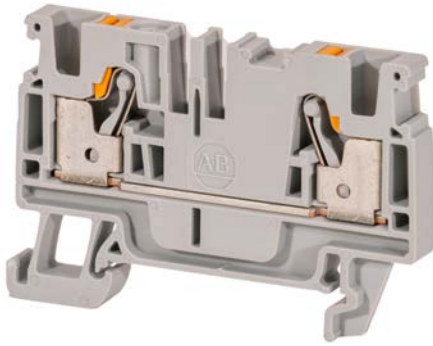

Terminal Blocks—Dimensions (W x H x L): 6.1 x 39.5 x 60 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-P4	100	Green	1492-P4-G	100
Red	1492-P4-RE	100	Yellow	1492-P4-Y	100
Blue	1492-P4-B	100	Orange	1492-P4-OR	100
Black	1492-P4-BL	100	White	1492-P4-W	100

Specifications — Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	30 A	32 A	30 A
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP4	50
	Blue	1492-EBP4-B	50
	Yellow	1492-EBP4-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-4-RE.

Wiring Diagram



IMPORTANT See page 131 for ferrule selection.

1492-P4T



Terminal Blocks—Dimensions (W x H x L): 6.1 x 39.5 x 74 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-P4T	50	Green	1492-P4T-G	50
Red	1492-P4T-RE	50	Yellow	1492-P4T-Y	50
Blue	1492-P4T-B	50	Orange	1492-P4T-OR	50
Black	1492-P4T-BL	50	White	1492-P4T-W	50

Specifications — Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	30 A	32 A	30 A
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP4T	20
	Blue	1492-EBP4T-B	20
	Yellow	1492-EBP4T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.	
Center Jumpers ⁽¹⁾			
2-pole	1492-CJP4-2	60	
3-pole	1492-CJP4-3	20	
4-pole	1492-CJP4-4		
5-pole	1492-CJP4-5		
6-pole	1492-CJP4-6		
7-pole	1492-CJP4-7		
8-pole	1492-CJP4-8		
9-pole	1492-CJP4-9		
10-pole	1492-CJP4-10	5	
50-pole	1492-CJP4-50		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards	
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll	

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See page 131 for ferrule selection.

1492-P4Q



Terminal Blocks—Dimensions (W x H x L): 6.1 x 39.5 x 87.5 mm					
Color		Cat. No.	Pkg. Qty.	Color	
		1492-P4Q	50		
		1492-P4Q-	50		
		1492-P4Q-B	50		
		1492-P4Q-	50		


Specifications — Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	30 A	32 A	30 A
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP4Q	20
	Blue	1492-EBP4Q-B	20
	Yellow	1492-EBP4Q-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See page 131 for ferrule selection.

1492-P6



Terminal Blocks—Dimensions (W x H x L): 8.1 x 45.5 x 66.5 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-P6	50	Green	1492-P6-G	50
Red	1492-P6-	50	Yellow	1492-P6-Y	50
Blue	1492-P6-B	50	Orange	1492-P6-OR	50
Black	1492-P6-	50	White	1492-P6-W	50

Specifications — Single-level Feed-through Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	38 A	41 A	36 A
Wire Range (Rated Cross Section)	22...8 AWG	6 mm ²	6 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP6	50
	Blue	1492-EBP6-B	50
	Yellow	1492-EBP6-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP6-2	60
3-pole		1492-CJP6-3	20
4-pole		1492-CJP6-4	60
6-pole		1492-CJP6-6	20
10-pole		1492-CJP6-10	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P6TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll

(1) Available in orange as standard, to order in blue, add B to the catalog number listed:
Example for a blue
2-pole center jumper, the catalog number is 1492-CJP6-2-B.

Wiring Diagram



IMPORTANT See page [132](#) for ferrule selection.

1492-P6T



Terminal Blocks –Dimensions (W x H x L): 8.1 x 45.5 x 84.5 mm							
Color		Cat. No.	Pkg. Qty.	Color		Cat. No.	Pkg. Qty.
	Gray	1492-P6T	50		Green	1492-P6T-G	50
	Red	1492-P6T-RE	50		Yellow	1492-P6T-Y	50
	Blue	1492-P6T-B	50		Orange	1492-P6T-OR	50
	Black	1492-P6T-BL	50		White	1492-P6T-W	50

Specifications — Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	38 A	41 A	36 A
Wire Range (Rated Cross Section)	22...8 AWG	6 mm ²	6 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP6T	50
	Blue	1492-EBP6T-B	20
	Yellow	1492-EBP6T-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP6-2	60
3-pole		1492-CJP6-3	20
4-pole		1492-CJP6-4	60
6-pole		1492-CJP6-6	20
10-pole		1492-CJP6-10	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P6TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers	1492-MT8X8 (500/roll)	1 roll


(1) Available in orange as standard, to order in blue, add B to the catalog number listed:
Example for a blue
2-pole center jumper, the catalog number is 1492-CJP6-2-B.

Wiring Diagram



IMPORTANT See page 132 for ferrule selection.

1492-P6D

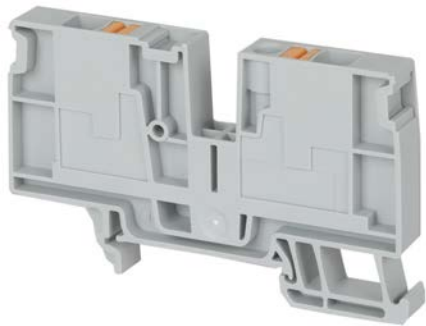


Terminal Blocks –Dimensions (W x H x L): 9 x 45.5 x 77 mm							
Color		Cat. No.	Pkg. Qty.	Color		Cat. No.	Pkg. Qty.
	Gray	1492-P6D	20		Blue	1492-P6D-B	20
Specifications – Single-level Feed-through Distribution Terminal Block							
Certifications		 /CSA		IEC		ATEX	
Voltage Rating		600V AC/DC		800V AC/DC		550V AC/DC	
Maximum Current		38 A		41 A		33 A	
Wire Range (Rated Cross Section)		22...8 AWG		6 mm ²		6 mm ²	
Wire Strip Length		0.47 in. (12 mm)					
Density		34 pcs/ft (111 pcs/m)					
Housing Temperature Range		-76...+266 °F (-60...+130 °C)					
Accessories			Cat. No.			Pkg. Qty.	
Mounting Rails, End Barriers, End Anchors and Retainers							
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1				10	
	Aluminum	1492-DR5				10	
	Hi-Rise	1492-DR6				2	
	Angled (Steel)	1492-DR7				2	
End Barriers			Included as part of 1492-P6D or 1492-P6D-B				
End Retainer			1492-ERL35				20
			1492-ERP35				20
End Anchor DIN Rail	Normal Duty	1492-EAJ35				50	
	Heavy Duty	1492-EAHJ35				50	
	Normal Duty	1492-EAP35				50	

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP2-2	20
		1492-CJP3-2	60
3-pole		1492-CJP2-3	20
		1492-CJP3-3	20
4-pole		1492-CJP2-4	20
		1492-CJP3-4	20
5-pole		1492-CJP2-5	20
		1492-CJP3-5	20
6-pole		1492-CJP2-6	20
		1492-CJP3-6	20
7-pole		1492-CJP2-7	20
		1492-CJP3-7	20
8-pole		1492-CJP2-8	20
		1492-CJP3-8	20
9-pole		1492-CJP2-9	20
		1492-CJP3-9	20
10-pole		1492-CJP2-10	20
		1492-CJP3-10	20
20-pole		1492-CJP2-20	20
		1492-CJP3-20	20
50-pole	1492-CJP2-50	20	
	1492-CJP3-50	20	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP2-2-RE.

Wiring Diagram



IMPORTANT See page 132 for ferrule selection.

1492-P10



Terminal Blocks—Dimensions (W x H x L): 10 x 51.5 x 80.5 mm						
Color		Cat. No.	Pkg. Qty.	Color		Pkg. Qty.
	Gray	1492-P10	25		Green	25
	Red	1492-P10-RE	25		Yellow	25
	Blue	1492-P10-B	25		Orange	25
	Black	1492-P10-BL	25		White	25

Specifications — Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1000V AC/DC	550V AC/DC
Maximum Current	55 A	57 A	52 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP10/16	20
	Blue	1492-EBP10/16-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP10-2	25
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P10TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT10X8 (370/roll)	1 roll

(1) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See page [133](#) for ferrule selection.

1492-P10T



Terminal Blocks —Dimensions (W x H x L): 10x 51.5 x 102 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-P10T	25	 Blue	1492-P10T-B	25


Specifications — Single-level Feed-through Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1000V AC/DC	550V AC/DC
Maximum Current	55 A	57 A	52 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP10/16T	20
	Blue	1492-EBP10/16T-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP10-2	25
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P10TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT10X8 (370/roll)	1 roll


(1) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See page [133](#) for ferrule selection.

1492-P16

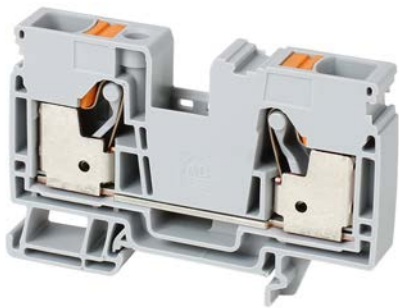

Terminal Blocks—Dimensions (W x H x L): 12 x 51.5 x 80.5 mm

Color		Cat. No.	Pkg. Qty.	Color		Cat. No.	Pkg. Qty.
	Gray	1492-P16	20		Green	1492-P16-G	20
	Red	1492-P16-RE	20		Yellow	1492-P16-Y	20
	Blue	1492-P16-B	20		Orange	1492-P16-OR	20
	Black	1492-P16-BL	20		White	1492-P16-W	20

Specifications — Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1000V AC/DC	550V AC/DC
Maximum Current	62 A	76 A	64 A
Wire Range (Rated Cross Section)	18...6 AWG	16 mm ²	16 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP10/16	20
	Blue	1492-EBP10/16-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP16-2	25
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P10TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT12X8 (320/roll)	1 roll


(1) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See page 134 for ferrule selection.

1492-P16T

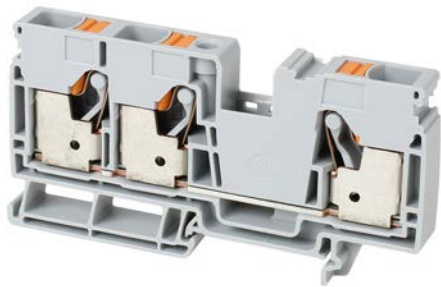

Terminal Blocks —Dimensions (W x H x L): 12x 51.5 x 102 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-P16T	20	Blue	1492-P16T-B	20

Specifications — Single-level Feed-through Terminal Block

Certifications	/CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1000V AC/DC	550V AC/DC
Maximum Current	62 A	76 A	64 A
Wire Range (Rated Cross Section)	18...6 AWG	16 mm ²	16 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Mounting Rails, End Barriers, End Anchors and Retainers

Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP10/16T	20
	Blue	1492-EBP10/16T-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP16-2	25
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P10TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT12X8 (320/roll)	1 roll

(1) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See page [134](#) for ferrule selection.

1492-P16D



Terminal Blocks –Dimensions (W x H x L):12 x 51.5 x 95.5 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-P16D	20	Blue	1492-P16D-B	20

Specifications – Single-level Feed-through Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V
Maximum Current	62 A	76 A	69 A
Wire Range (Rated Cross Section)	18...6 AWG	16 mm ²	16 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers		Included as part of 1492-P16D/-	
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP2-2	20
		1492-CJP3-2	60
		1492-CJP4-2	60
		1492-CJP6-2	60

Accessories		Cat. No.	Pkg. Qty.	
Center Jumpers ⁽¹⁾				
3-pole	Orange	1492-CJP2-3	20	
		1492-CJP3-3	20	
		1492-CJP4-3	20	
		1492-CJP6-3	20	
4-pole		1492-CJP2-4	20	
		1492-CJP3-4	20	
		1492-CJP4-4	20	
		1492-CJP6-4	60	
5-pole		1492-CJP2-5	20	
		1492-CJP3-5	20	
		1492-CJP4-5	20	
6-pole		1492-CJP2-6	20	
		1492-CJP3-6	20	
		1492-CJP4-6	20	
		1492-CJP6-6	20	
7-pole		1492-CJP2-7	20	
		1492-CJP3-7	20	
		1492-CJP4-7	20	
8-pole		1492-CJP2-8	20	
		1492-CJP3-8	20	
		1492-CJP4-8	20	
9-pole		1492-CJP2-9	20	
		1492-CJP3-9	20	
		1492-CJP4-9	20	
10-pole		1492-CJP2-10	20	
		1492-CJP3-10	20	
		1492-CJP4-10	20	
		1492-CJP6-10	20	
20-pole		1492-CJP2-20	20	
		1492-CJP3-20	20	
50-pole		1492-CJP2-50	20	
		1492-CJP3-50	20	
		1492-CJP4-50	5	
Test Plugs				
Start Test Plugs		1492-PTPS	50	
Marking Systems				
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾		1492-MR6X8 (120/card)	5 cards	
ClearMultiprint Markers		1492-MT12X8 (320/roll)	1 roll	

- (1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP2-2-RE.

- (2) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See page 134 for ferrule selection.

1492-P35



Terminal Blocks —Dimensions (W x H x L):16 x 101.5 x 71.5 mm							
Color		Cat. No.	Pkg. Qty.	Color		Cat. No.	Pkg. Qty.
	Gray	1492-P35	10		Blue	1492-P35-B	10

Specifications – Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	1000V AC/DC	1000V AC/1500V DC	880V AC/DC
Maximum Current	113 A	125 A	105 A
Wire Range (Rated Cross Section)	12...2 AWG	35 mm ²	35 mm ²
Wire Strip Length	0.98 in. (25 mm)		
Density	19 pcs/ft (62 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg.
Center Jumpers			
2-pole	Orange	1492-CJP35-2	10
Auxiliary Connection			
Auxiliary Connection	Grey	1492-P35AC2X6	5
Auxiliary Connection	Blue	1492-P35AC2X6-B	5
Auxiliary Connection	Green/Yellow	1492-P35AC2X6-GY	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers ⁽¹⁾		1492-MT8X8 (500/roll)	1 roll

(1) Two markers per terminal block are required.

Wiring Diagram



1492-P35DM



Terminal Blocks –Dimensions (W x H x L):16 x 101.5 x 71.5 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Grey	1492-P35DM	10	 Blue	1492-P35DM-B	10


Specifications – Single-level Feed-through Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	1000V AC/DC	1000V AC/1500V DC	880V AC/DC
Maximum Current	113 A	125 A	105 A
Wire Range (Rated Cross Section)	12...2 AWG	35 mm ²	35 mm ²
Wire Strip Length	0.98 in. (25 mm)		
Density	19 pcs/ft (62 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg.
Center Jumpers			
2-pole	Orange	1492-CJP35-2	10
Auxiliary Connection			
Auxiliary Connection	Grey	1492-P35AC2X6	5
Auxiliary Connection	Blue	1492-P35AC2X6-B	5
Auxiliary Connection	Green/Yellow	1492-P35AC2X6-GY	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers ⁽¹⁾		1492-MT8X8 (500/roll)	1 roll

(1) Two markers per terminal block are required.

Wiring Diagram



1492-P50/70



Terminal Blocks –Dimensions (W x H x L):20 x 80.5 x 101.5 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Grey	1492-P50/70	5	 Blue	1492-P50/70-B	5

Specifications – Single-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	1000V AC/DC	1000V AC/DC	1100V AC/DC
Maximum Current	175 A	150 A	128 A
Wire Range (Rated Cross Section)	8...2/0 AWG	50 mm ²	50 mm ²
Wire Strip Length	1.18 in. (30 mm)		
Density	15 pcs/ft (50 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg.
Center Jumpers			
2-pole	Orange	1492-CJP50/70-2	10
Auxillary Connection			
Auxillary Connection	Grey	1492-P50/185AC2X10	5
Auxillary Connection	Blue	1492-P50/185AC2X10-B	5
Test Plugs			
Start Test Plugs		1492-PTPS	50

Accessories		Cat. No.	Pkg.
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers ⁽¹⁾		1492-MT8X8 (500/roll)	1 roll
Auxiliary Connection			
Auxiliary Connection	Grey	1492-P50/185AC2X10	5
Auxiliary Connection	Blue	1492-P50/185AC2X10-B	5

(1) Two markers per terminal block are required.

Wiring Diagram



1492-P50/70DM



Terminal Blocks —Dimensions (W x H x L):20 x 80.5 x 134 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-P50/70DM	5	 Blue	1492-P50/70DM-B	5

Specifications — Single-level Feed-through Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	1000V AC/DC	1000V AC/DC	1100V AC/DC
Maximum Current	175 A	150 A	128 A
Wire Range (Rated Cross Section)	8...2/0 AWG	50 mm ²	50 mm ²
Wire Strip Length	1.18 in. (30 mm)		
Density	15 pcs/ft (50 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP50/70-2	10
Auxiliary Connection			
Auxiliary	Grey	1492-P50/185AC2X10	5
Auxiliary	Blue	1492-P50/185AC2X10-B	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll

(1) Two markers per terminal block are required.

Wiring Diagram



1492-P95/120



Terminal Blocks –Dimensions (W x H x L):25 x 90 x 101.5 mm						
Color	Cat. No.	Pkg. Qty.	Color		Cat. No.	Pkg. Qty.
 Gray	1492-P95/120	5	 Blue		1492-P95/120-B	5

Specifications – Single-level Feed-through Distribution Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1100V AC/DC	1100V AC/DC
Maximum Current	255 A	211 A	211 A
Wire Range (Rated Cross Section)	4...3/0 AWG	95 mm ²	95 mm ²
Wire Strip Length	1.57 in. (40 mm)		
Density	12 pcs/ft (40 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP95/120-2	10
3-pole	Orange	1492-CJP95/120-3	10
Auxiliary Connection			
Auxiliary Connection	Grey	1492-P50/185AC2X10	5
Auxiliary Connection	Blue	1492-P50/185AC2X10-B	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll

(1) Two markers per terminal block are required.

Wiring Diagram



1492-P95/120DM



Terminal Blocks –Dimensions (W x H x L):25 x 90 x 133.5 mm			
Color	Cat. No.	Pkg. Qty.	
 Gray	1492-P95/120DM	5	

Specifications – Single-level Feed-through Distribution Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1100V AC/DC	1100V AC/DC
Maximum Current	255 A	211 A	211 A
Wire Range (Rated Cross Section)	4...3/0 AWG	95 mm ²	95 mm ²
Wire Strip Length	1.57 in. (40 mm)		
Density	12 pcs/ft (40 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP95/120-2	10
3-pole	Orange	1492-CJP95/120-3	10
Auxiliary Connection			
Auxiliary Connection	Grey	1492-P50/185AC2X10	5
Auxiliary Connection	Blue	1492-P50/185AC2X10-B	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll


(1) Two markers per terminal block are required.

Wiring Diagram



Single-level, Feed-through Grounding Terminal Blocks

1492-PG2

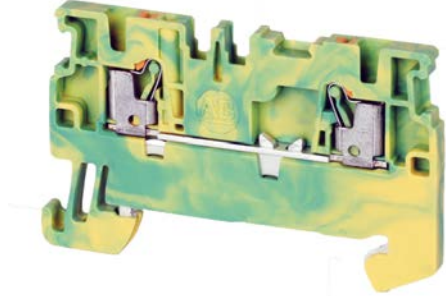

Terminal Blocks—Dimensions (W x H x L): 3.5 x 33.5 x 55 mm

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PG2	50

Specifications – Single-level Feed-through Grounding Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP2	50
	Blue	1492-EBP2-B	50
	Yellow	1492-EBP2-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumper⁽¹⁾		
2-pole	1492-CJP2-2	20
3-pole	1492-CJP2-3	
4-pole	1492-CJP2-4	
5-pole	1492-CJP2-5	
6-pole	1492-CJP2-6	
7-pole	1492-CJP2-7	
8-pole	1492-CJP2-8	
9-pole	1492-CJP2-9	
10-pole	1492-CJP2-10	
20-pole	1492-CJP2-20	
50-pole	1492-CJP2-50	

Test Plugs


Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50

Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers	1492-MT3X8 (1000/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP2-2-RE.

Wiring Diagram



IMPORTANT See page 129 for ferrule selection.

1492-PG2T

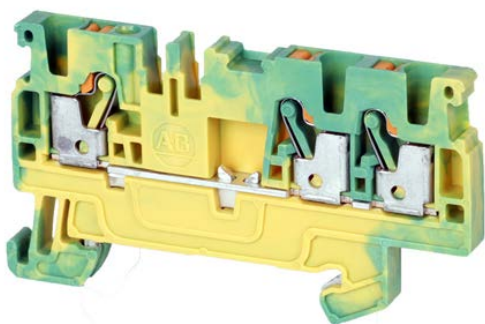

Terminal Blocks—Dimensions (W x H x L): 3.5 x 33.5 x 61.5 mm

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PG2T	50

Specifications — Single-level Feed-through Grounding Terminal Block


Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	500V AC/DC
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP2T	50
	Blue	1492-EBP2T-B	50
	Yellow	1492-EBP2T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.	
Center Jumpers ⁽¹⁾			
2-pole	1492-CJP2-2	20	
3-pole	1492-CJP2-3		
4-pole	1492-CJP2-4		
5-pole	1492-CJP2-5		
6-pole	1492-CJP2-6		
7-pole	1492-CJP2-7		
8-pole	1492-CJP2-8		
9-pole	1492-CJP2-9		
10-pole	1492-CJP2-10		
20-pole	1492-CJP2-20		
50-pole	1492-CJP2-50		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers		1492-MT3X8 (1000/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP2-2-RE.

Wiring Diagram



IMPORTANT See page 129 for ferrule selection.

1492-PG2Q

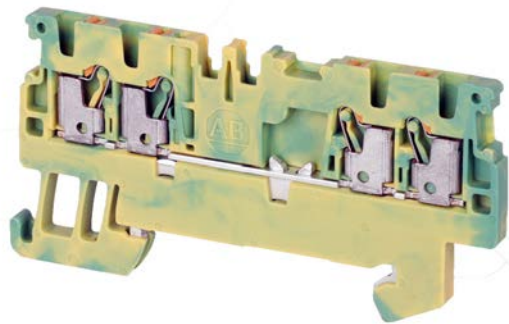

Terminal Blocks—Dimensions (W x H x L): 3.5 x 33.5 x 67.5 mm			
Color		Cat. No.	Pkg. Qty.
		1492-PG2Q	50

Specifications — Single-level Feed-through Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP2Q	50
	Blue	1492-EBP2Q-B	50
	Yellow	1492-EBP2Q-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP2-2	20
3-pole		1492-CJP2-3	
4-pole		1492-CJP2-4	
5-pole		1492-CJP2-5	
6-pole		1492-CJP2-6	
7-pole		1492-CJP2-7	
8-pole		1492-CJP2-8	
9-pole		1492-CJP2-9	
10-pole		1492-CJP2-10	
20-pole		1492-CJP2-20	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-M3X10 (192/card)	5 cards
ClearMultiprint Markers	1492-MT3X8 (1000/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP2-2-RE.

Wiring Diagram



IMPORTANT See page 129 for ferrule selection.

1492-PG3

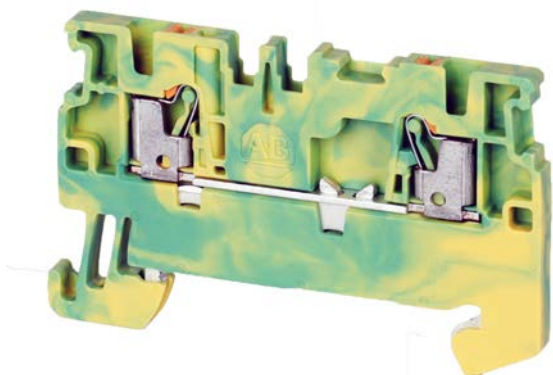**Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 55 mm**

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PG3	50

Specifications — Single-level Feed-through Grounding Terminal Block

Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP3	50
	Blue	1492-EBP3-B	50
	Yellow	1492-EBP3-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2	60
3-pole	1492-CJP3-3	20
4-pole	1492-CJP3-4	
5-pole	1492-CJP3-5	
6-pole	1492-CJP3-6	
7-pole	1492-CJP3-7	
8-pole	1492-CJP3-8	
9-pole	1492-CJP3-9	
10-pole	1492-CJP3-10	
20-pole	1492-CJP3-20	
50-pole	1492-CJP3-50	


Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram

IMPORTANT See page [130](#) for ferrule selection.

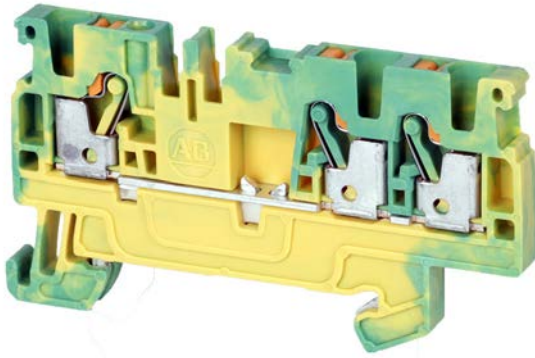1492-PG3T**Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 66.5 mm**

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PG3T	50

Specifications – Single-level Feed-through Grounding Terminal Block

Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP3T	50
	Blue	1492-EBP3T-B	50
	Yellow	1492-EBP3T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2	60
3-pole	1492-CJP3-3	20
4-pole	1492-CJP3-4	
5-pole	1492-CJP3-5	
6-pole	1492-CJP3-6	
7-pole	1492-CJP3-7	
8-pole	1492-CJP3-8	
9-pole	1492-CJP3-9	
10-pole	1492-CJP3-10	
20-pole	1492-CJP3-20	
50-pole	1492-CJP3-50	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50


Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram

IMPORTANT See page [130](#) for ferrule selection.

1492-PG3Q

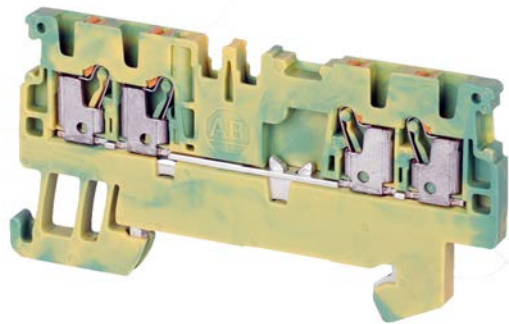

Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 77.5 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PG3Q	50

Specifications – Single-level Feed-through Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	26...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP3Q	50
	Blue	1492-EBP3Q-B	50
	Yellow	1492-EBP3Q-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50


Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See page [130](#) for ferrule selection.

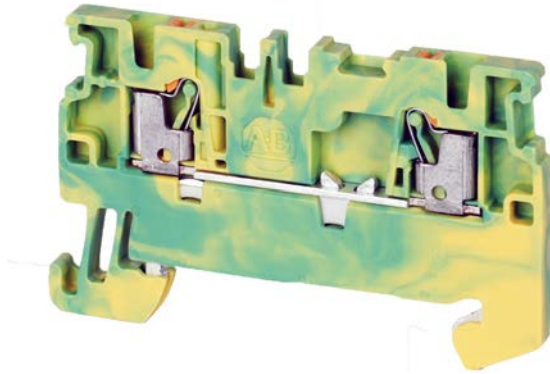1492-PG4**Terminal Blocks—Dimensions (W x H x L): 6.1 x 39.5 x 60 mm**

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PG4	50

Specifications – Single-level Feed-through Grounding Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Mounting Rails, End Barriers, End Anchors and Retainers

Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP4	50
	Blue	1492-EBP4-B	50
	Yellow	1492-EBP4-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Center Jumpers⁽¹⁾

2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5

Test Plugs

Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50

Marking Systems


ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram

IMPORTANT See page [131](#) for ferrule selection.

1492-PG4T

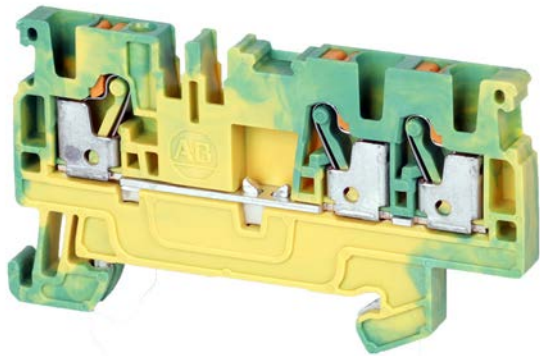

Terminal Blocks—Dimensions (W x H x L): 6.1 x 39.5 x 74 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PG4T	50

Specifications – Single-level Feed-through Grounding Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP4T	20
	Blue	1492-EBP4T-B	20
	Yellow	1492-EBP4T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See page 131 for ferrule selection.

1492-PG4Q

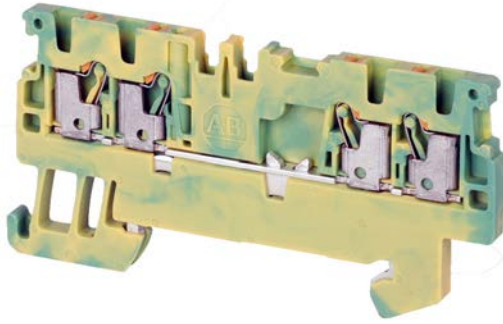

Terminal Blocks—Dimensions (W x H x L): 6.1 x 39.5 x 87.5 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PG4Q	50
Specifications – Single-level Feed-through Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP4Q	20
	Blue	1492-EBP4Q-B	20
	Yellow	1492-EBP4Q-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See page 131 for ferrule selection.

1492-PG6



Terminal Blocks—Dimensions (W x H x L): 8.1x 45.5 x 66.5 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PG6	50
Specifications – Single-level Feed-through Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	22...8 AWG	6 mm ²	6 mm ²
Wire Strip Length	0.47 in (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP6	50
	Blue	1492-EBP6-B	50
	Yellow	1492-EBP6-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP6-2	60
3-pole		1492-CJP6-3	20
4-pole		1492-CJP6-4	60
6-pole		1492-CJP6-6	20
10-pole		1492-CJP6-10	20
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P6TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll


(1) Available in orange as standard, to order in blue, add -B suffix to the catalog number listed.
Example for a blue 2-pole center jumper, the catalog number is 1492-CJP6-2-B.

Wiring Diagram



IMPORTANT See page [132](#) for ferrule selection.

1492-PG6T

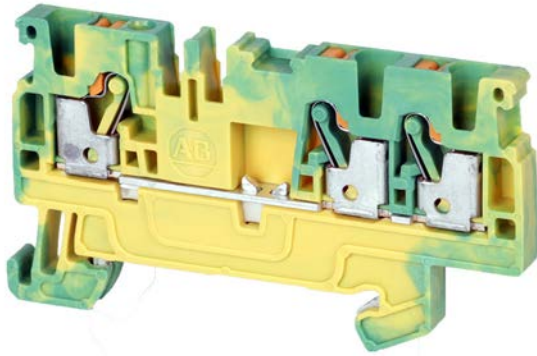**Terminal Blocks—Dimensions (W x H x L): 8.1x 45.5 x 84.5 mm**

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PG6T	50


Specifications — Single-level Feed-through Grounding Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	22...8 AWG	6 mm ²	6 mm ²
Wire Strip Length	0.47 in (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP6T	50
	Blue	1492-EBP6T-B	20
	Yellow	1492-EBP6T-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.	
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP6-2	60
3-pole		1492-CJP6-3	20
4-pole		1492-CJP6-4	60
6-pole		1492-CJP6-6	20
10-pole		1492-CJP6-10	20
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P6TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll

- (1) Available in orange as standard, to order in blue, add -B suffix to the catalog number listed.
Example for a blue 2-pole center jumper, the catalog number is 1492-CJP6-2-B.

Wiring Diagram

IMPORTANT See page [132](#) for ferrule selection.

1492-PG10

**Terminal Blocks—Dimensions (W x H x L): 10 x 51.5 x 80.5 mm**

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PG10	25

Specifications – Single-level Feed-through Grounding Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1000V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP10/16	20
	Blue	1492-EBP10/16-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP10-2	25
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-PIOTPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT10X8 (370/roll)	1 roll

(1) Two marker card markers per terminal block are required.

Wiring Diagram**IMPORTANT** See page [133](#) for ferrule selection.

1492-PG10T

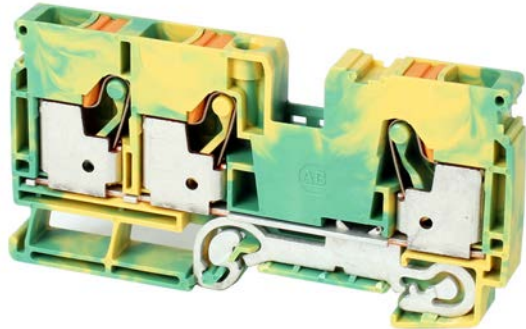

Terminal Blocks—Dimensions (W x H x L): 10 x 51.5 x 102 mm			
Color	Cat. No.	Pkg. Qty.	
 Green/Yellow	1492-PG10T	25	


Specifications – Single-level Feed-through Grounding Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1000V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers		
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1
	Aluminum	1492-DR5
	Hi-Rise (Aluminum)	1492-DR6
	Angled (Steel)	1492-DR7
End Barriers	Gray	1492-EBP10/16T
	Blue	1492-EBP10/16T-B
End Retainer	1492-ERL35	20
	1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35
	Heavy Duty	1492-EAHJ35
	Normal Duty	1492-EAP35

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers		
2-pole	Orange	1492-CJP10-2
Test Plugs		
Test Plugs	Start Test Plug	1492-PTPS
	Test Plug	1492-P10TPE
Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT10X8 (370/roll)	1 roll

(1) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See page [133](#) for ferrule selection.

1492-PG16

**Terminal Blocks—Dimensions (W x H x L): 12 x 51.5 x 80.5 mm**

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PG16	20

Specifications – Single-level Feed-through Grounding Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1000V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	18...6 AWG	16 mm ²	16 mm ²
Wire Strip Length	0.71 in (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP10/16	20
	Blue	1492-EBP10/16-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP16-2	25
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-PIOTPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT12X8 (320/roll)	1 roll

(1) Two marker card markers per terminal block are required.

Wiring Diagram**IMPORTANT** See page [134](#) for ferrule selection.

1492-PG16T

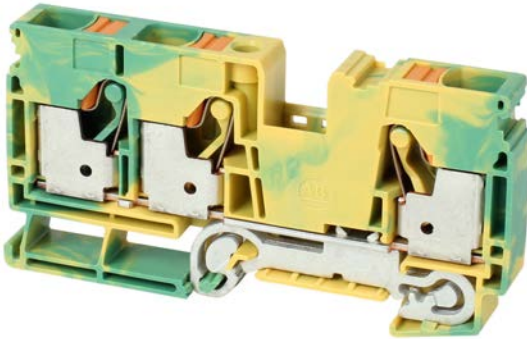

Terminal Blocks—Dimensions (W x H x L): 12 x 51.5 x 102 mm			
Color	Cat. No.	Pkg. Qty.	
 Green/Yellow	1492-PG16T	20	


Specifications — Single-level Feed-through Grounding Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	1000V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	18...6 AWG	16 mm ²	16 mm ²
Wire Strip Length	0.71 in (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers		
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1 10
	Aluminum	1492-DR5 10
	Hi-Rise (Aluminum)	1492-DR6 2
	Angled (Steel)	1492-DR7 2
End Barriers	Gray	1492-EBP10/16T 20
	Blue	1492-EBP10/16T-B 20
End Retainer	1492-ERL35	20
	1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35 50
	Heavy Duty	1492-EAHJ35 50
	Normal Duty	1492-EAP35 50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers		
2-pole	Orange	1492-CJP16-2 25
Test Plugs		
Test Plugs	Start Test Plug	1492-PTPS 50
	Test Plug	1492-P10TPE 50
Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT12X8 (320/roll)	1 roll

(1) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See page [134](#) for ferrule selection.

1492-PG35



Terminal Blocks—Dimensions (W x H x L): 16 x 101.5 x 71.5 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PG35	10


Specifications – Single-level Feed-through Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	1000V AC/DC	1000V AC/1500V DC	...
Wire Range (Rated Cross Section)	12...2 AWG	35 mm ²	35 mm ²
Wire Strip Length	0.98 in. (25 mm)		
Density	19 pcs/ft (62 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP35-2	10
Auxiliary Connection			
Auxiliary Connection	Grey	1492-P35AC2X6	5
Auxiliary Connection	Blue	1492-P35AC2X6-B	5
Auxiliary Connection	Green/Yellow	1492-P35AC2X6-GY	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR8X10 (84/ card)	5 cards
ClearMultiprint Markers ⁽¹⁾		1492-MT8X8 (500/	1 roll

(1) Two markers per terminal block are required.

Wiring Diagram



1492-PG50/70



Terminal Blocks—Dimensions (W x H x L): 20 x 80.5 x 101.5 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PG50/70	5

Specifications – Single-level Feed-through Distribution Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	1000V AC/DC	1000V AC/DC	...
Wire Range (Rated Cross Section)	8...2/0 AWG	50 mm ²	50 mm ²
Wire Strip Length	1.18 in. (30 mm)		
Density	15 pcs/ft (50 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP50/70-2	10
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Auxiliary Connection			
Auxiliary	Grey	1492-P50/185AC2X10	5
Auxiliary	Blue	1492-P50/185AC2X10-B	5
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers ⁽¹⁾		1492-MT8X8 (500/roll)	1 roll

(1) Two markers per terminal block are required.

Wiring Diagram



1492-PG95/120



Terminal Blocks —Dimensions (W x H x L):25 x 90 x 101.5 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PG95/120	5

Specifications — Single-level Feed-through Distribution Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	...V AC/DC	...V AC/DC
Wire Range (Rated Cross Section)	4...3/0 AWG	95 mm ²	95 mm ²
Wire Strip Length	1.57 in. (40 mm)		
Density	12 pcs/ft (40 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers			
2-pole	Orange	1492-CJP95/120-2	10
3-pole	Orange	1492-CJP95/120-3	10
Auxiliary Connection			
Auxiliary Connection	Grey	1492-P50/185AC2X10	5
Auxiliary Connection	Blue	1492-P50/185AC2X10-B	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽¹⁾		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll

(1) Two markers per terminal block are required.

Wiring Diagram



Double-level, Feed-through Terminal Blocks

1492-PD2



Terminal Blocks—Dimensions (W x H x L): 3.5 x 45 x 84 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-PD2	50	Green	1492-PD2-G	50
Red	1492-PD2-RE	50	Yellow	1492-PD2-Y	50
Blue	1492-PD2-B	50	Orange	1492-PD2-OR	50
Black	1492-PD2-BL	50	White	1492-PD2-W	50

Specifications — Double-level Feed-through Terminal Block

Certifications	UL / CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	440V AC/DC
Maximum Current	13 A	16 A	13.5 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD2	20
	Blue	1492-EBPD2-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP2-2	60
3-pole	1492-CJP2-3	20
4-pole	1492-CJP2-4	
5-pole	1492-CJP2-5	
6-pole	1492-CJP2-6	
7-pole	1492-CJP2-7	
8-pole	1492-CJP2-8	
9-pole	1492-CJP2-9	
10-pole	1492-CJP2-10	
20-pole	1492-CJP2-20	
50-pole	1492-CJP2-50	

Test Plugs


Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50

Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers	1492-MT3X8 (1000/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PD2C

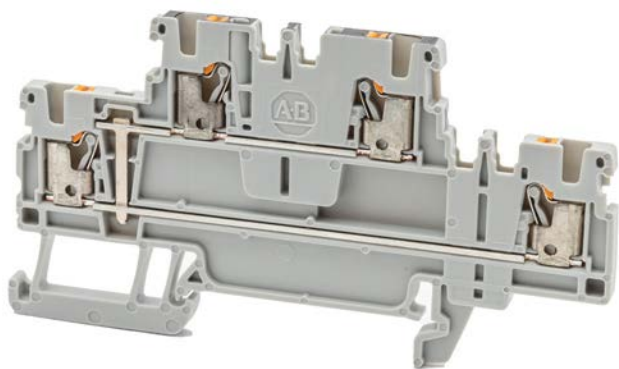

Terminal Blocks—Dimensions (W x H x L): 3.5 x 45 x 84 mm		
Color	Cat. No.	Pkg. Qty.
 Gray	1492-PD2C	50
 Blue	1492-PD2C-B	50


Specifications – Double-level Feed-through Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	440V AC/DC
Maximum Current	13 A	16 A	13.5 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD2	20
	Blue	1492-EBPD2-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP2-2	60
3-pole		1492-CJP2-3	20
4-pole		1492-CJP2-4	
5-pole		1492-CJP2-5	
6-pole		1492-CJP2-6	
7-pole		1492-CJP2-7	
8-pole		1492-CJP2-8	
9-pole		1492-CJP2-9	
10-pole		1492-CJP2-10	
20-pole		1492-CJP2-20	
50-pole		1492-CJP2-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers		1492-MT3X8 (1000/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PD3

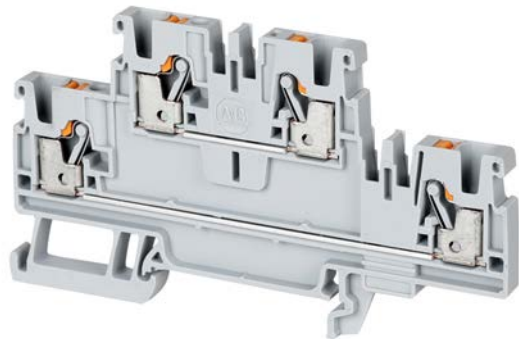

Terminal Blocks—Dimensions (W x H x L): 5.1 x 50.5 x 90 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-PD3	50	Green	1492-PD3-G	50
Red	1492-PD3-RE	50	Yellow	1492-PD3-Y	50
Blue	1492-PD3-B	50	Orange	1492-PD3-OR	50
Black	1492-PD3-BL	50	White	1492-PD3-W	50

Specifications — Double-level Feed-through Terminal Block


Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	21 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD3	20
	Blue	1492-EBPD3-B	20
	Yellow	1492-EBPD3-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PD3C



Terminal Blocks—Dimensions (W x H x L): 5.1 x 50.5 x 90 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-PD3C	50	Green	1492-PD3C-G	50
Red	1492-PD3C-RE	50	Yellow	1492-PD3C-Y	50
Blue	1492-PD3C-B	50	Orange	1492-PD3C-OR	50
Black	1492-PD3C-BL	50	White	1492-PD3C-W	50


Specifications — Double-level Feed-through Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	21 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD3	20
	Blue	1492-EBPD3-B	20
	Yellow	1492-EBPD3-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PD4

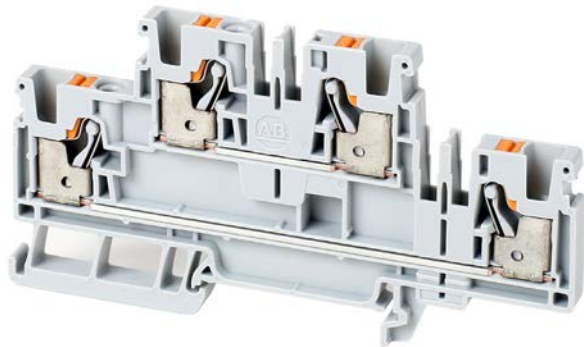

Terminal Blocks—Dimensions (W x H x L): 6.1 x 53.5 x 100 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-PD4	50	Green	1492-PD4-G	50
Red	1492-PD4-RE	50	Yellow	1492-PD4-Y	50
Blue	1492-PD4-B	50	Orange	1492-PD4-OR	50
Black	1492-PD4-BL	50	White	1492-PD4-W	50


Specifications — Double-level Feed-through Terminal Block			
Certifications	/CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	30 A	32 A	25 A
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers		
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1
	Aluminum	1492-DR5
	Hi-Rise (Aluminum)	1492-DR6
	Angled (Steel)	1492-DR7
End Barriers	Gray	1492-EBPD4
	Blue	1492-EBPD4-B
End Retainer	1492-ERL35	20
	1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35
	Heavy Duty	1492-EAHJ35
	Normal Duty	1492-EAP35

Accessories	Cat. No.	Pkg. Qty.	
Center Jumpers ⁽¹⁾			
2-pole	1492-CJP4-2	60	
3-pole	1492-CJP4-3	20	
4-pole	1492-CJP4-4		
5-pole	1492-CJP4-5		
6-pole	1492-CJP4-6		
7-pole	1492-CJP4-7		
8-pole	1492-CJP4-8		
9-pole	1492-CJP4-9		
10-pole	1492-CJP4-10	5	
50-pole	1492-CJP4-50		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See [page 131](#) for ferrule selection.

1492-PD4C

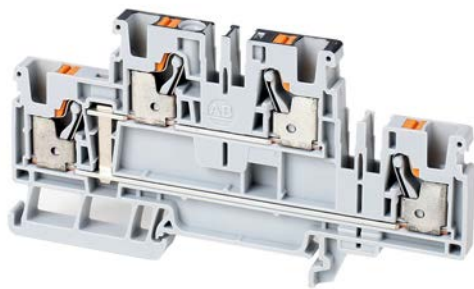

Terminal Blocks—Dimensions (W x H x L): 6.1 x 53.5 x 100 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-PD4C	50	 Blue	1492-PD4C-B	50

Specifications — Double-level Feed-through Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	30 A	32 A	25 A
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD4	20
	Blue	1492-EBPD4-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See [page 131](#) for ferrule selection.

1492-PDG2

**Terminal Blocks—Dimensions (W x H x L): 3.5 x 45 x 84 mm**

Color	Cat. No.	Pkg. Qty.
 Gray	1492-PDG2	50

Specifications — Double-level Feed-through Grounding Terminal Block

Certifications	 /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	440V AC/DC
Maximum Current	13 A	16 A	13.5 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD2	20
	Blue	1492-EBPD2-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP2-2	60
3-pole		1492-CJP2-3	20
4-pole		1492-CJP2-4	
5-pole		1492-CJP2-5	
6-pole		1492-CJP2-6	
7-pole		1492-CJP2-7	
8-pole		1492-CJP2-8	
9-pole		1492-CJP2-9	
10-pole		1492-CJP2-10	
50-pole		1492-CJP2-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50

Marking Systems


ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers	1492-MT3X8 (1000/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram

IMPORTANT See [page 131](#) for ferrule selection.

1492-PDG2C

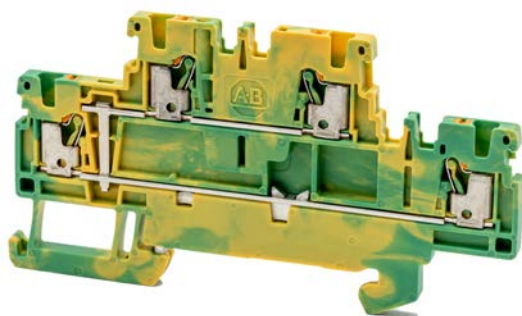**Terminal Blocks—Dimensions (W x H x L): 3.5 x 45 x 84 mm**

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PDG2C	50

Specifications — Double-level Feed-through Grounding Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	440V AC/DC
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD2	20
	Blue	1492-EBPD2-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP2-2	60
3-pole		1492-CJP2-3	20
4-pole		1492-CJP2-4	
5-pole		1492-CJP2-5	
6-pole		1492-CJP2-6	
7-pole		1492-CJP2-7	
8-pole		1492-CJP2-8	
9-pole		1492-CJP2-9	
10-pole		1492-CJP2-10	
50-pole		1492-CJP2-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50

Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers	1492-MT3X8 (1000/roll)	1 roll

- (1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram

IMPORTANT See [page 131](#) for ferrule selection.

1492-PDG3



Terminal Blocks—Dimensions (W x H x L): 5.1x 50.5 x 90 mm			
Color		Cat. No.	Pkg. Qty.
 Gray		1492-PDG3	50


Specifications — Double-level Feed-through Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	21 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD3	20
	Blue	1492-EBPD3-B	20
	Yellow	1492-EBPD3-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PDG3C

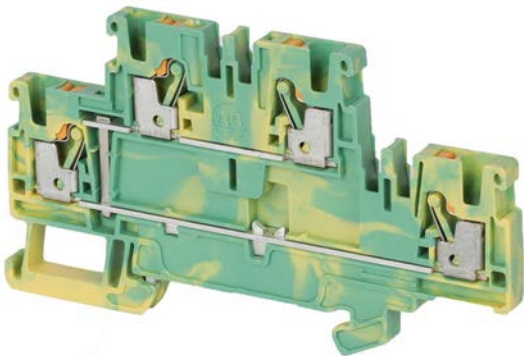


Terminal Blocks—Dimensions (W x H x L): 5.1x 50.5 x 90 mm			
Color		Cat. No.	Pkg. Qty.
		1492-PDG3C	50
Specifications — Double-level Feed-through Grounding Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD3	20
	Blue	1492-EBPD3-B	20
	Yellow	1492-EBPD3-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP2-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PDG4C

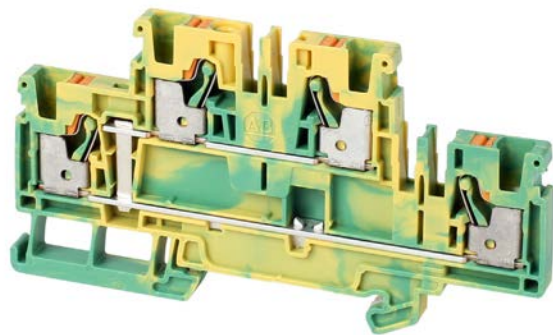


Terminal Blocks—Dimensions (W x H x L): 6.1x 53.5 x 100 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PDG4C	50
Specifications — Double-level Feed-through Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		
Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD4	20
	Blue	1492-EBPD4-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See [page 131](#) for ferrule selection.

Double-level, Feed-through Terminal Blocks

1492-PD3T



Terminal Blocks—Dimensions (W x H x L): 5.1x 64 x 114.5 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-PD3T	50	 Blue	1492-PD3T-B	50

Specifications — Double-level Feed-through Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	22 A	19 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD3T	20
	Blue	1492-EBPD3T-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2	60
3-pole	1492-CJP3-3	20
4-pole	1492-CJP3-4	
5-pole	1492-CJP3-5	
6-pole	1492-CJP3-6	
7-pole	1492-CJP3-7	
8-pole	1492-CJP3-8	
9-pole	1492-CJP3-9	
10-pole	1492-CJP3-10	
20-pole	1492-CJP3-20	
50-pole	1492-CJP3-50	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PDG3T**Terminal Blocks—Dimensions (W x H x L): 5.1 x 64 x 114.5 mm**

Color	Cat. No.	Pkg. Qty.
 Gray	1492-PDG3T	50


Specifications — Double-level Feed-through Terminal Block

Certifications	 /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	22 A	19 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD3T	20
	Blue	1492-EBPD3T-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole	1492-CJP3-50		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram

IMPORTANT See [page 130](#) for ferrule selection.

1492-PD3TC



Terminal Blocks—Dimensions (W x H x L): 5.1 x 64 x 114.5 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-PD3TC	50	 Blue	1492-PD3TC-B	50

Specifications — Double-level Feed-through Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	22 A	19 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD3T	20
	Blue	1492-EBPD3T-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2	60
3-pole	1492-CJP3-3	20
4-pole	1492-CJP3-4	
5-pole	1492-CJP3-5	
6-pole	1492-CJP3-6	
7-pole	1492-CJP3-7	
8-pole	1492-CJP3-8	
9-pole	1492-CJP3-9	
10-pole	1492-CJP3-10	
20-pole	1492-CJP3-20	
50-pole	1492-CJP3-50	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PDG3TC



Terminal Blocks—Dimensions (W x H x L): 5.1 x 64 x 114.5 mm

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PDG3TC	50

Specifications — Double-level Feed-through Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	...
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266 °F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPD3T	20
	Blue	1492-EBPD3T-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2	60
3-pole	1492-CJP3-3	20
4-pole	1492-CJP3-4	
5-pole	1492-CJP3-5	
6-pole	1492-CJP3-6	
7-pole	1492-CJP3-7	
8-pole	1492-CJP3-8	
9-pole	1492-CJP3-9	
10-pole	1492-CJP3-10	
20-pole	1492-CJP3-20	
50-pole	1492-CJP3-50	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

Three-level, Feed-through Terminal Blocks

1492-PT3



Terminal Blocks—Dimensions (W x H x L): 5.1 x 64.5 x 116 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-PT3	50	 Blue	1492-PT3-B	50

Specifications – Single-level Feed-through Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	22 A	19 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Mounting Rails, End Barriers, End Anchors and Retainers

Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPT3	20
	Blue	1492-EBPT3-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	

Test Plugs			
------------	--	--	--


Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50

Marking Systems			
-----------------	--	--	--

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PT3C



Terminal Blocks—Dimensions (W x H x L): 5.1 x 64.5 x 116 mm							
Color		Cat. No.	Pkg. Qty.	Color		Cat. No.	Pkg. Qty.
	Gray	1492-PT3C	50		Blue	1492-PT3C-B	50


Specifications — Single-level Feed-through Terminal Block			
Certifications	 / CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	19 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.	
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPT3	20
	Blue	1492-EBPT3-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole	1492-CJP3-50		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.


Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

Three-level, Feed-through Grounding Terminal Blocks

1492-PTG3

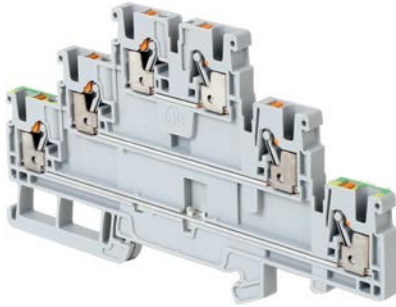

Terminal Blocks—Dimensions (W x H x L): 5.1 x 64.5 x 116 mm

Color		Cat. No.	Pkg. Qty.
	Gray	1492-PTG3	50

Specifications – Single-level Feed-through Terminal Block


Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	19 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPT3	20
	Blue	1492-EBPT3-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole	1492-CJP3-50		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PTG3C

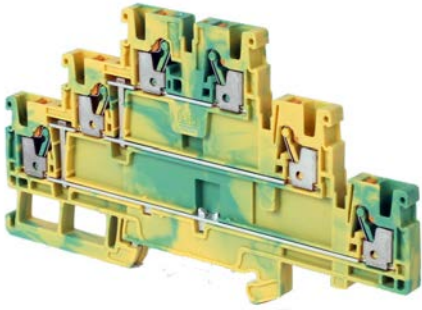

Terminal Blocks—Dimensions (W x H x L): 5.1 x 64.5 x 116 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PTG3C	50


Specifications — Single-level Feed-through Terminal Block			
Certifications	UL / CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	19 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPT3	20
	Blue	1492-EBPT3-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

Four-level Feed-through Terminal Blocks

1492-PQ3



Terminal Blocks—Dimensions (W x H x L): 5.1 x 88.5 x 107 mm

Color		Cat. No.	Pkg. Qty.
	Gray	1492-PQ3	50
	Gray	1492-PQ3-800	50

Specifications – Single-level Feed-through Terminal Block


Certifications	UL /CSA	IEC	ATEX
Voltage Rating, -PQ3	600V AC/DC	690V AC/DC	440V AC/DC
Voltage Rating, -PQ3-800	600V AC/DC	800V AC/DC	550V AC/DC
Maximum Current	20 A	22 A	19 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPQ3	20
		Included as part of 1492-PQ3-800	
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

Disconnect Terminal Blocks

1492-PKD3



Terminal Blocks—Dimensions (W x H x L): 5.1 x 37.65 x 77.5 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-PKD3	50	 Blue	1492-PKD3-B	50

Specifications – Single-level Disconnect Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	400V AC/DC
Maximum Current	20 A	20 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP3Q	50
	Blue	1492-EBP3Q-B	50
	Yellow	1492-EBP3Q-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PKD3T

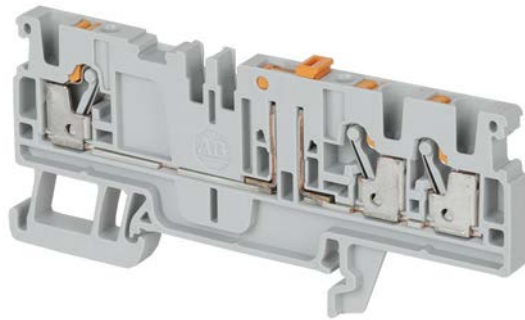

Terminal Blocks—Dimensions (W x H x L): 5.1 x 37.65 x 84.5 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-PKD3T	50	Blue	1492-PKD3T-B	50


Specifications — Single-level Feed-through Terminal Block			
Certifications	UL / CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	400V AC/DC
Maximum Current	20 A	20 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPKD3T	50
	Blue	1492-EBPKD3T-B	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PKD3Q

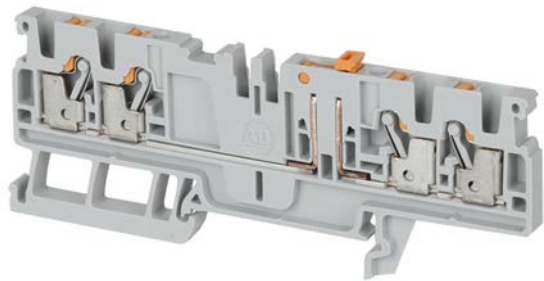

Terminal Blocks—Dimensions (W x H x L): 5.1 x 37.65 x 96 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-PKD3Q	50	 Blue	1492-PKD3Q-B	50

Specifications – Single-level Disconnect Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	400V AC/DC
Maximum Current	20 A	20 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPKD3Q	50
	Blue	1492-EBPKD3Q-B	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card) (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PKD4

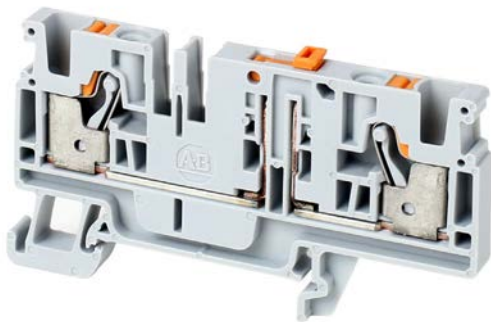

Terminal Blocks—Dimensions (W x H x L): 6.1 x 41 x 74 mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
 Gray	1492-PKD4	50	 Blue	1492-PKD4-B	50

Specifications — Single-level Disconnect Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	500V AC/DC	400V AC/DC
Maximum Current	20 A	24 A	20 A
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBP4T	20
	Blue	1492-EBP4T-B	20
	Yellow	1492-EBP4T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See [page 131](#) for ferrule selection.

1492-PDKD4



Terminal Blocks—Dimensions (W x H x L): 6.1 x 56.5 x 126.5 mm		
Color	Cat. No.	Pkg. Qty.
 Gray	1492-PDKD4	50


Specifications – Double-level Disconnect Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	250V AC/DC
Maximum Current	25 A	20 A	20 A
Wire Range (Rated Cross Section)	26 AWG...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPDFB4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See [page 131](#) for ferrule selection.

1492-PDGKD4



Terminal Blocks—Dimensions (W x H x L): 6.1 x 56.5 x 126.5 mm

Color	Cat. No.	Pkg. Qty.
 Gray	1492-PDGKD4	50

Specifications — Double-level Disconnect Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	250V AC/DC
Maximum Current	25 A	20 A	20 A
Wire Range (Rated Cross Section)	26 AWG...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Mounting Rails, End Barriers, End Anchors and Retainers

Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPDFB4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP4-2	60
3-pole	1492-CJP4-3	20
4-pole	1492-CJP4-4	
5-pole	1492-CJP4-5	
6-pole	1492-CJP4-6	
7-pole	1492-CJP4-7	
8-pole	1492-CJP4-8	
9-pole	1492-CJP4-9	
10-pole	1492-CJP4-10	5
50-pole	1492-CJP4-50	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See [page 131](#) for ferrule selection.

1492-PDKD23

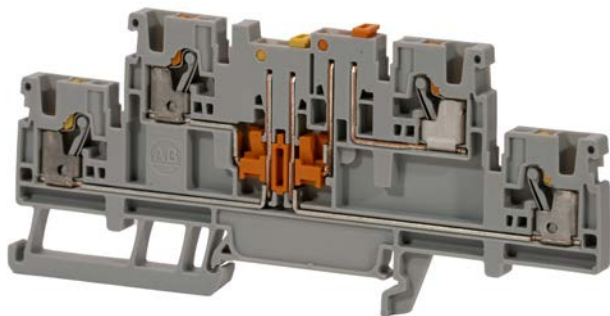

Terminal Blocks — Dimensions (W x H x L): 5.1 x 54 x 89 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-PDKD23	50	Blue	1492-PDKD23-B	50

Specifications — Double-level Disconnect Terminal Block

Certifications	UL / CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Maximum Current	13 A	17.5 A	13 A
Wire Range (Rated Cross Section)	28 AWG...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPDKD3	20
	Blue	1492-EBPDKD3-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50


Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

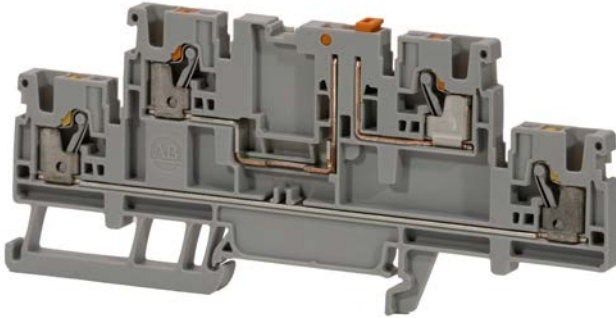1492-PDKD3**Terminal Blocks —Dimensions (W x H x L): 5.1 x 54 x 89 mm**

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Gray	1492-PDKD3	50	Blue	1492-PDKD3-B	50

Specifications — Double-level Disconnect Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	690V AC/DC
Maximum Current	20 A	24 A	20 A
Wire Range (Rated Cross Section)	28 AWG...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPDK3	20
	Blue	1492-EBPDK3-B	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2	60
3-pole	1492-CJP3-3	20
4-pole	1492-CJP3-4	
5-pole	1492-CJP3-5	
6-pole	1492-CJP3-6	
7-pole	1492-CJP3-7	
8-pole	1492-CJP3-8	
9-pole	1492-CJP3-9	
10-pole	1492-CJP3-10	
20-pole	1492-CJP3-20	
50-pole	1492-CJP3-50	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.

Wiring Diagram

IMPORTANT See [page 130](#) for ferrule selection.

Sensor Terminal Blocks

1492-PS2-2



Terminal Blocks—Dimensions (W x H x L): 3.5 x 42 x 80 mm			
Color		Cat. No.	Pkg. Qty.
Grey		1492-PS2-2	100
Specifications — Sensor Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	220V AC/DC
Maximum Current	13 A	13.5 A	12 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		
Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPS-3	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
	Red	1492-CJP2-2-RE	20
3-pole	Blue	1492-CJP2-3-B	20
	Red	1492-CJP2-3-RE	20
4-pole	Blue	1492-CJP2-4-B	20
	Red	1492-CJP2-4-RE	20
5-pole	Blue	1492-CJP2-5-B	20
	Red	1492-CJP2-5-RE	20
6-pole	Blue	1492-CJP2-6-B	20
	Red	1492-CJP2-6-RE	20
7-pole	Blue	1492-CJP2-7-B	20
	Red	1492-CJP2-7-RE	20
8-pole	Blue	1492-CJP2-8-B	20
	Red	1492-CJP2-8-RE	20
9-pole	Blue	1492-CJP2-9-B	20
	Red	1492-CJP2-9-RE	20
10-pole	Blue	1492-CJP2-10-B	20
	Red	1492-CJP2-10-RE	20
20-pole	Blue	1492-CJP2-20-B	20
	Red	1492-CJP2-20-RE	20
50-pole	Blue	1492-CJP2-50-B	20
	Red	1492-CJP2-50-RE	20
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers	1492-MT3X8 (1000/roll)	1 roll

(1) Available in orange, to order remove the -B or RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 129](#) for ferrule selection.

1492-PS2-3



Terminal Blocks—Dimensions (W x H x L): 3.5 x 42 x 80 mm			
Color		Cat. No.	Pkg. Qty.
	Grey	1492-PS2-3	100

Specifications – Sensor Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	220V AC/DC
Maximum Current	13 A	13.5 A	12 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPS-3	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
	Red	1492-CJP2-2-RE	20
3-pole	Blue	1492-CJP2-3-B	20
	Red	1492-CJP2-3-RE	20
4-pole	Blue	1492-CJP2-4-B	20
	Red	1492-CJP2-4-RE	20
5-pole	Blue	1492-CJP2-5-B	20
	Red	1492-CJP2-5-RE	20
6-pole	Blue	1492-CJP2-6-B	20
	Red	1492-CJP2-6-RE	20
7-pole	Blue	1492-CJP2-7-B	20
	Red	1492-CJP2-7-RE	20
8-pole	Blue	1492-CJP2-8-B	20
	Red	1492-CJP2-8-RE	20
9-pole	Blue	1492-CJP2-9-B	20
	Red	1492-CJP2-9-RE	20
10-pole	Blue	1492-CJP2-10-B	20
	Red	1492-CJP2-10-RE	20
20-pole	Blue	1492-CJP2-20-B	20
	Red	1492-CJP2-20-RE	20
50-pole	Blue	1492-CJP2-50-B	20
	Red	1492-CJP2-50-RE	20

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50

Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers		1492-MT3X8 (1000/roll)	1 roll


(1) Available in orange, to order remove the -B or RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 129](#) for ferrule selection.

1492-PSG2-3

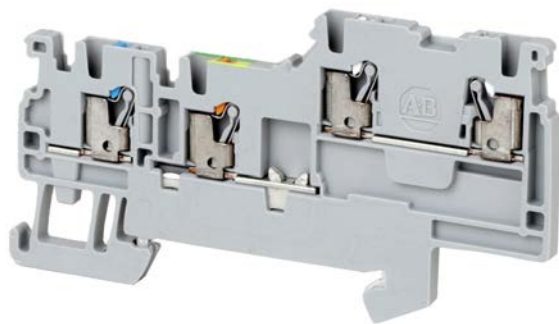


Terminal Blocks—Dimensions (W x H x L): 3.5 x 42 x 80 mm			
Color		Cat. No.	Pkg. Qty.
 Grey		1492-PSG2-3	100
Specifications – Sensor with Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	220V AC/DC
Maximum Current	13 A	13.5 A	12 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		
Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPS-3	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
	Red	1492-CJP2-2-RE	20
3-pole	Blue	1492-CJP2-3-B	20
	Red	1492-CJP2-3-RE	20
4-pole	Blue	1492-CJP2-4-B	20
	Red	1492-CJP2-4-RE	20
5-pole	Blue	1492-CJP2-5-B	20
	Red	1492-CJP2-5-RE	20
6-pole	Blue	1492-CJP2-6-B	20
	Red	1492-CJP2-6-RE	20
7-pole	Blue	1492-CJP2-7-B	20
	Red	1492-CJP2-7-RE	20
8-pole	Blue	1492-CJP2-8-B	20
	Red	1492-CJP2-8-RE	20
9-pole	Blue	1492-CJP2-9-B	20
	Red	1492-CJP2-9-RE	20
10-pole	Blue	1492-CJP2-10-B	20
	Red	1492-CJP2-10-RE	20
20-pole	Blue	1492-CJP2-20-B	20
	Red	1492-CJP2-20-RE	20
50-pole	Blue	1492-CJP2-50-B	20
	Red	1492-CJP2-50-RE	20
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers		1492-MT3X8 (1000/roll)	1 roll


(1) Available in orange, to order remove the -B or RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 129](#) for ferrule selection.

1492-PS2-4

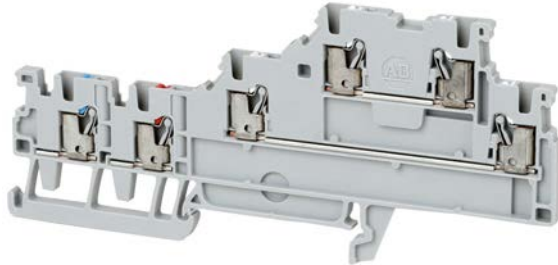

Terminal Blocks—Dimensions (W x H x L): 3.5 x 49.5 x 110 mm			
Color		Cat. No.	Pkg. Qty.
	Grey	1492-PS2-4	100
Specifications – Sensor Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	220V AC/DC
Maximum Current	13 A	13.5 A	12 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		
Accessories			
Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPS-4	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
	Red	1492-CJP2-2-RE	20
3-pole	Blue	1492-CJP2-3-B	20
	Red	1492-CJP2-3-RE	20
4-pole	Blue	1492-CJP2-4-B	20
	Red	1492-CJP2-4-RE	20
5-pole	Blue	1492-CJP2-5-B	20
	Red	1492-CJP2-5-RE	20
6-pole	Blue	1492-CJP2-6-B	20
	Red	1492-CJP2-6-RE	20
7-pole	Blue	1492-CJP2-7-B	20
	Red	1492-CJP2-7-RE	20
8-pole	Blue	1492-CJP2-8-B	20
	Red	1492-CJP2-8-RE	20
9-pole	Blue	1492-CJP2-9-B	20
	Red	1492-CJP2-9-RE	20
10-pole	Blue	1492-CJP2-10-B	20
	Red	1492-CJP2-10-RE	20
20-pole	Blue	1492-CJP2-20-B	20
	Red	1492-CJP2-20-RE	20
50-pole	Blue	1492-CJP2-50-B	20
	Red	1492-CJP2-50-RE	20

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50


Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers		1492-MT3X8 (1000/roll)	1 roll

(1) Available in orange. To order, remove the -B or RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 129](#) for ferrule selection.

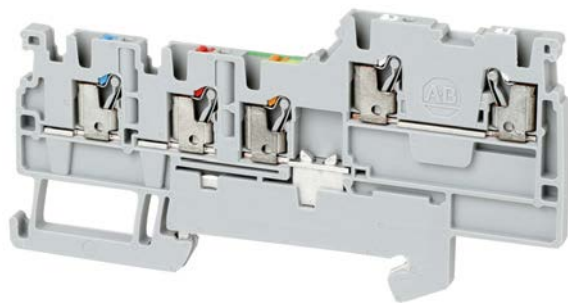1492-PSG2-4


Terminal Blocks—Dimensions (W x H x L): 3.5 x 45x 89 mm			
Color		Cat. No.	Pkg. Qty.
	Grey	1492-PSG2-4	100
Specifications – Sensor with Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	220V AC/DC
Maximum Current	13 A	13.5 A	12 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		
Accessories			
Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPGS-4	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
	Red	1492-CJP2-2-RE	20
3-pole	Blue	1492-CJP2-3-B	20
	Red	1492-CJP2-3-RE	20
4-pole	Blue	1492-CJP2-4-B	20
	Red	1492-CJP2-4-RE	20
5-pole	Blue	1492-CJP2-5-B	20
	Red	1492-CJP2-5-RE	20
6-pole	Blue	1492-CJP2-6-B	20
	Red	1492-CJP2-6-RE	20
7-pole	Blue	1492-CJP2-7-B	20
	Red	1492-CJP2-7-RE	20
8-pole	Blue	1492-CJP2-8-B	20
	Red	1492-CJP2-8-RE	20
9-pole	Blue	1492-CJP2-9-B	20
	Red	1492-CJP2-9-RE	20
10-pole	Blue	1492-CJP2-10-B	20
	Red	1492-CJP2-10-RE	20
20-pole	Blue	1492-CJP2-20-B	20
	Red	1492-CJP2-20-RE	20
50-pole	Blue	1492-CJP2-50-B	20
	Red	1492-CJP2-50-RE	20

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P2TPE	50

Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers		1492-MT3X8 (1000/roll)	1 roll

(1) Available in orange, to order remove the -B or RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram

IMPORTANT See [page 129](#) for ferrule selection.

Control Power Distribution Terminal Blocks

1492-P6PD2S-1B



To create full solution pair with end block 1492-P6PD2E-6B.

Terminal Blocks—Dimensions (W x H x L): 8.1 x 48 x 85.5 mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P6PD2S-1B	20


Specifications — Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Maximum Current	36 A	41 A	33 A
Wire Range (Rated Cross Section)	22...8 AWG	6 mm ²	6 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
3-pole		1492-CJP2-3-B	
4-pole		1492-CJP2-4-B	
5-pole		1492-CJP2-5-B	
6-pole		1492-CJP2-6-B	
7-pole		1492-CJP2-7-B	
8-pole		1492-CJP2-8-B	
9-pole		1492-CJP2-9-B	
10-pole		1492-CJP2-10-B	
20-pole		1492-CJP2-20-B	
50-pole	1492-CJP2-50-B		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll


(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 132](#) for ferrule selection.

1492-P6PD2S-1RE

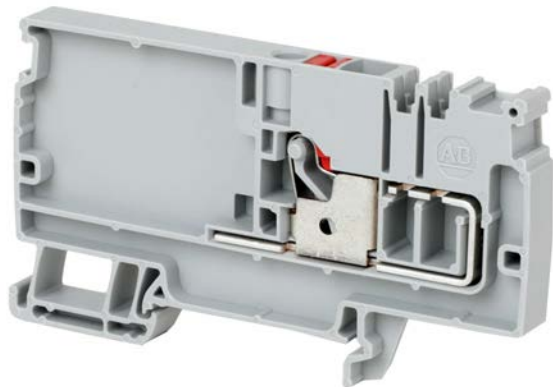

To create full solution pair with end block 1492-P6PD2E-6RE.

Terminal Blocks—Dimensions (W x H x L): 8.1 x 48 x 85.5 mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P6PD2S-1RE	20


Specifications — Control Power Distribution Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Maximum Current	36 A	41 A	33 A
Wire Range (Rated Cross Section)	22...8 AWG	6 mm ²	6 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Red	1492-CJP2-2-RE	20
3-pole		1492-CJP2-3-RE	
4-pole		1492-CJP2-4-RE	
5-pole		1492-CJP2-5-RE	
6-pole		1492-CJP2-6-RE	
7-pole		1492-CJP2-7-RE	
8-pole		1492-CJP2-8-RE	
9-pole		1492-CJP2-9-RE	
10-pole		1492-CJP2-10-RE	
20-pole		1492-CJP2-20-RE	
50-pole		1492-CJP2-50-RE	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll

(1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 132](#) for ferrule selection.

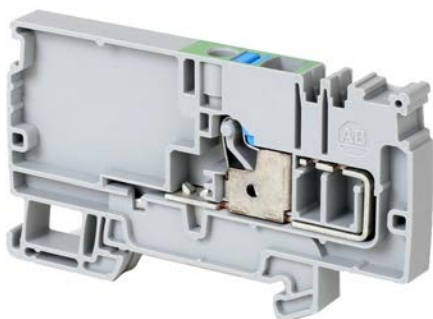1492-PG6PD2S

To create full solution pair with end block
1492-P6PD2E-6B.

Terminal Blocks—Dimensions (W x H x L): 8.1 x 48 x 85.5 mm

Color	Cat. No.	Pkg. Qty.
 Grey	1492-PG6PD2S	20

Specifications — Control Power Distribution with Grounding Terminal Block

Certifications	 /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Wire Range (Rated Cross Section)	22...8 AWG	6 mm ²	6 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.	
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
3-pole		1492-CJP2-3-B	
4-pole		1492-CJP2-4-B	
5-pole		1492-CJP2-5-B	
6-pole		1492-CJP2-6-B	
7-pole		1492-CJP2-7-B	
8-pole		1492-CJP2-8-B	
9-pole		1492-CJP2-9-B	
10-pole		1492-CJP2-10-B	
20-pole		1492-CJP2-20-B	
50-pole	1492-CJP2-50-B		


Test Plugs

Test Plugs	Start Test Plug	1492-PTPS	50
------------	-----------------	-----------	----

Marking Systems


ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR8X10 (84/card)	5 cards
ClearMultiPrint Markers	1492-MT8X8 (500/roll)	1 roll

(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram

IMPORTANT See [page 132](#) for ferrule selection.

1492-P6PD2E-6B

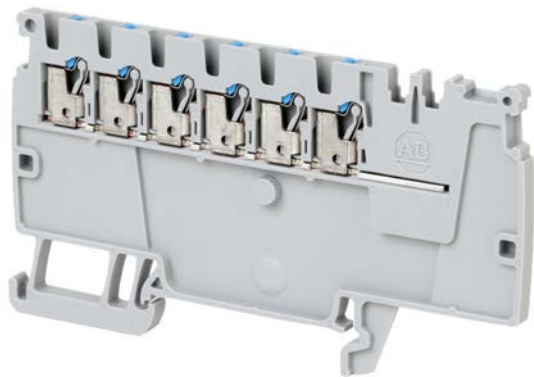

To create full solution pair with end block 1492-P6PD2S-6* OR 1492-P6PD/6X2*.

Terminal Blocks—Dimensions (W x H x L): 3.5x 48 x 85.5 mm			
Color ⁽¹⁾		Cat. No.	Pkg. Qty.
	Grey	1492-P6PD2E-6B	50
	Grey	1492-P6PD2E-6W	50
	Grey	1492-P6PD2E-6BL	50
	Grey	1492-P6PD2E-6BR	50
	Grey	1492-P6PD2E-6OR	50

(1) Catalog number suffix refers to pusher color: -B = Blue, -W= White, -BL = Black, -BR = Brown, -OR = Orange.

Specifications – Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Maximum Current	13 A	17.5 A	13 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
3-pole		1492-CJP2-3-B	
4-pole		1492-CJP2-4-B	
5-pole		1492-CJP2-5-B	
6-pole		1492-CJP2-6-B	
7-pole		1492-CJP2-7-B	
8-pole		1492-CJP2-8-B	
9-pole		1492-CJP2-9-B	
10-pole		1492-CJP2-10-B	
20-pole		1492-CJP2-20-B	
50-pole		1492-CJP2-50-B	

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers	1492-MT3X8 (1000/roll)	1 roll

(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2. To order other colors, remove the -B suffix and add the appropriate suffix to the catalog number listed: White = W, Black = BL, Brown = BR. Example for a white 2-pole center jumper, the catalog number will be 1492-CJP2-2-W.

Wiring Diagram



IMPORTANT See [page 129](#) for ferrule selection.

1492-P6PD2E-6RE



To create full solution pair with end block
1492-P6PD2S-6RE OR 1492-P6PD/6X2-RE.

Terminal Blocks—Dimensions (W x H x L): 3.5x 48 x 85.5 mm			
Color		Cat. No.	Pkg. Qty.
	Grey	1492-P6PD2E-6RE	50

Specifications — Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	500V AC/DC	550V AC/DC
Maximum Current	13 A	17.5 A	13 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (8 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Red	1492-CJP2-2-RE	20
3-pole		1492-CJP2-3-RE	
4-pole		1492-CJP2-4-RE	
5-pole		1492-CJP2-5-RE	
6-pole		1492-CJP2-6-RE	
7-pole		1492-CJP2-7-RE	
8-pole		1492-CJP2-8-RE	
9-pole		1492-CJP2-9-RE	
10-pole		1492-CJP2-10-RE	
20-pole		1492-CJP2-20-RE	
50-pole		1492-CJP2-50-RE	

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR3X10 (192/card)	5 cards
ClearMultiprint Markers	1492-MT3X8 (1000/roll)	1 roll

(1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 129](#) for ferrule selection.

1492-P6PD2S-1B1RE

To create full solution pair with end block
1492-P6PD2E-3B3RE.


Terminal Blocks—Dimensions (W x H x L): 8.1 x 48 x 96 mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P6PD2S-1B1RE	20

Specifications — Control Power Distribution Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	220V AC/DC
Maximum Current	36 A	41 A	33 A
Wire Range (Rated Cross Section)	22...8 AWG	6 mm ²	6 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2-BRE	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Heavy Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
	Red	1492-CJP2-2-RE	20
3-pole	Blue	1492-CJP2-3-B	20
	Red	1492-CJP2-3-RE	20
4-pole	Blue	1492-CJP2-4-B	20
	Red	1492-CJP2-4-RE	20
5-pole	Blue	1492-CJP2-5-B	20
	Red	1492-CJP2-5-RE	20
6-pole	Blue	1492-CJP2-6-B	20
	Red	1492-CJP2-6-RE	20
7-pole	Blue	1492-CJP2-7-B	20
	Red	1492-CJP2-7-RE	20
8-pole	Blue	1492-CJP2-8-B	20
	Red	1492-CJP2-8-RE	20
9-pole	Blue	1492-CJP2-9-B	20
	Red	1492-CJP2-9-RE	20
10-pole	Blue	1492-CJP2-10-B	20
	Red	1492-CJP2-10-RE	20
20-pole	Blue	1492-CJP2-20-B	20
	Red	1492-CJP2-20-RE	20
50-pole	Blue	1492-CJP2-50-B	20
	Red	1492-CJP2-50-RE	20
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (600/roll)	1 roll

(1) Available in orange, to order remove the -B or RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram

IMPORTANT See [page 132](#) for ferrule selection.

1492-P6PD2S-1RE1G

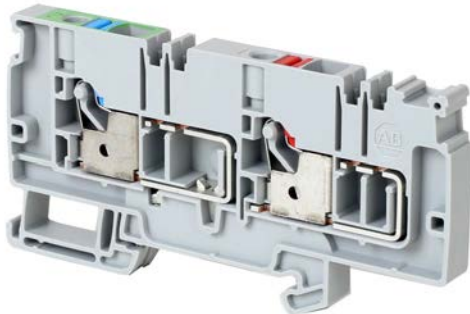

To create full solution pair with end block 1492-P6PD2E-3B3RE.

Terminal Blocks—Dimensions (W x H x L): 8.1 x 48 x 96 mm			
Color	Cat. No.	Pkg. Qty.	
■ Grey	1492-P6PD2S-1RE1G	20	

Specifications – Control Power Distribution with Grounding Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	220V AC/DC
Maximum Current	36 A	41 A	33 A
Wire Range (Rated Cross Section)	22...8 AWG	6 mm ²	6 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2-BRE	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
	Red	1492-CJP2-2-RE	20
3-pole	Blue	1492-CJP2-3-B	20
	Red	1492-CJP2-3-RE	20
4-pole	Blue	1492-CJP2-4-B	20
	Red	1492-CJP2-4-RE	20
5-pole	Blue	1492-CJP2-5-B	20
	Red	1492-CJP2-5-RE	20
6-pole	Blue	1492-CJP2-6-B	20
	Red	1492-CJP2-6-RE	20
7-pole	Blue	1492-CJP2-7-B	20
	Red	1492-CJP2-7-RE	20
8-pole	Blue	1492-CJP2-8-B	20
	Red	1492-CJP2-8-RE	20
9-pole	Blue	1492-CJP2-9-B	20
	Red	1492-CJP2-9-RE	20
10-pole	Blue	1492-CJP2-10-B	20
	Red	1492-CJP2-10-RE	20
20-pole	Blue	1492-CJP2-20-B	20
	Red	1492-CJP2-20-RE	20
50-pole	Blue	1492-CJP2-50-B	20
	Red	1492-CJP2-50-RE	20

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50

Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (600/roll)	1 roll


(1) Available in orange, to order remove the -B or RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 132](#) for ferrule selection.

1492-P6PD2E-3B3RE

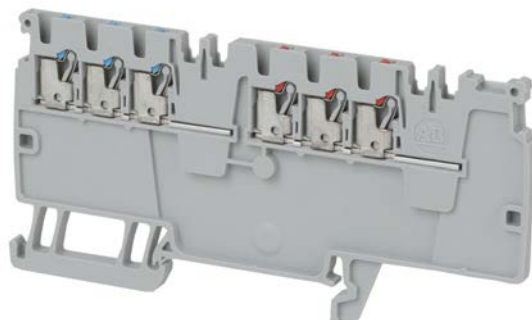

To create full solution pair with starter block 1492-P6PD2S.

Terminal Blocks—Dimensions (W x H x L): 3.5 x 48 x 96 mm			
Color		Cat. No.	Pkg. Qty.
 Grey		1492-P6PD2E-3B3RE	50

Specifications – Control Power Distribution Terminal Block			
Certifications	UL / CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	220V AC/DC
Maximum Current	13 A	16 A	13 A
Wire Range (Rated Cross Section)	26...14 AWG	1.5 mm ²	1.5 mm ²
Wire Strip Length	0.31 in. (12 mm)		
Density	87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2-BRE	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
	Red	1492-CJP2-2-RE	20
3-pole	Blue	1492-CJP2-3-B	20
	Red	1492-CJP2-3-RE	20
4-pole	Blue	1492-CJP2-4-B	20
	Red	1492-CJP2-4-RE	20
5-pole	Blue	1492-CJP2-5-B	20
	Red	1492-CJP2-5-RE	20
6-pole	Blue	1492-CJP2-6-B	20
	Red	1492-CJP2-6-RE	20
7-pole	Blue	1492-CJP2-7-B	20
	Red	1492-CJP2-7-RE	20
8-pole	Blue	1492-CJP2-8-B	20
	Red	1492-CJP2-8-RE	20
9-pole	Blue	1492-CJP2-9-B	20
	Red	1492-CJP2-9-RE	20
10-pole	Blue	1492-CJP2-10-B	20
	Red	1492-CJP2-10-RE	20
20-pole	Blue	1492-CJP2-20-B	20
	Red	1492-CJP2-20-RE	20
50-pole	Blue	1492-CJP2-50-B	20
	Red	1492-CJP2-50-RE	20

Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR3X10 (192/card)	5 cards
ClearMultiPrint Markers	1492-MT3X8 (1000/roll)	1 roll


(1) Available in orange, to order remove the -B or RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 129](#) for ferrule selection.

1492-P6PD/6X2-B

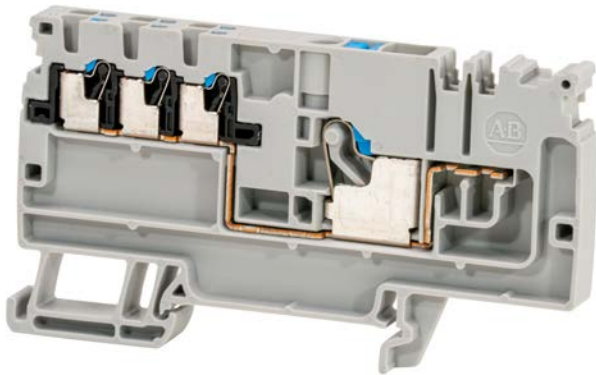

To create full solution pair with endblock 1492-P6PD2E-6*.

Terminal Blocks—Dimensions (W x H x L): 8.1 x 47 x 85.5 mm			
Color ⁽¹⁾		Cat. No.	Pkg. Qty.
	Grey	1492-P6PD/6X2-B	20
	Grey	1492-P6PD/6X2-W	20
	Grey	1492-P6PD/6X2-OR	20
	Grey	1492-P6PD/6X2-BR	20
	Grey	1492-P6PD/6X2-BL	20

(1) Catalog number suffix refers to pusher color: -B = Blue, -W= White, -BL = Black, -BR = Brown, -OR = Orange.

Specifications — Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	...	...
Maximum Current	38 A	...	...
Wire Range (Rated Cross Section)	Line 22...8 AWG Load 26...14 AWG	...	...
Wire Strip Length	0.31 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
3-pole		1492-CJP2-3-B	
4-pole		1492-CJP2-4-B	
5-pole		1492-CJP2-5-B	
6-pole		1492-CJP2-6-B	
7-pole		1492-CJP2-7-B	
8-pole		1492-CJP2-8-B	
9-pole		1492-CJP2-9-B	
10-pole		1492-CJP2-10-B	
20-pole		1492-CJP2-20-B	
50-pole		1492-CJP2-50-B	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50

Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll


(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2. To order other colors, remove the -B suffix and add the appropriate suffix to the catalog number listed: White = W, Black = BL, Brown = BR. Example for a white 2-pole center jumper, the catalog number will be 1492-CJP2-2-W.

Wiring Diagram



IMPORTANT See [page 129](#) for ferrule selection.

1492-P6PD/6X2-RE

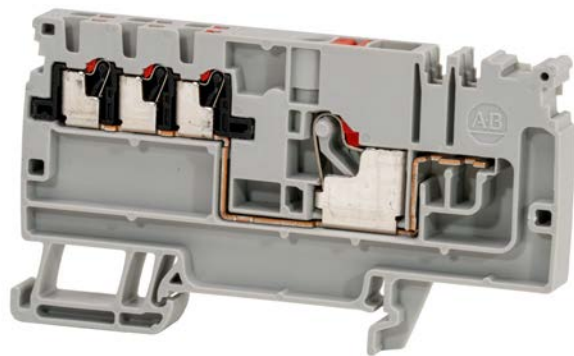

To create full solution pair with end block 1492-P6PD2E-6RE.

Terminal Blocks—Dimensions (W x H x L): 8.1 x 47 x 85.5 mm			
Color	Cat. No.	Pkg. Qty.	
 Grey	1492-P6PD/6X2-RE	20	


Specifications – Control Power Distribution Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	...	...
Maximum Current	38 A	...	...
Wire Range (Rated Cross Section)	Line 22...8 AWG Load 26...14 AWG	...	...
Wire Strip Length	0.31 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Red	1492-CJP2-2-RE	20
3-pole		1492-CJP2-3-RE	
4-pole		1492-CJP2-4-RE	
5-pole		1492-CJP2-5-RE	
6-pole		1492-CJP2-6-RE	
7-pole		1492-CJP2-7-RE	
8-pole		1492-CJP2-8-RE	
9-pole		1492-CJP2-9-RE	
10-pole		1492-CJP2-10-RE	
20-pole		1492-CJP2-20-RE	
50-pole		1492-CJP2-50-RE	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers		1492-MT8X8 (500/roll)	1 roll

(1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram



IMPORTANT See [page 129](#) for ferrule selection.

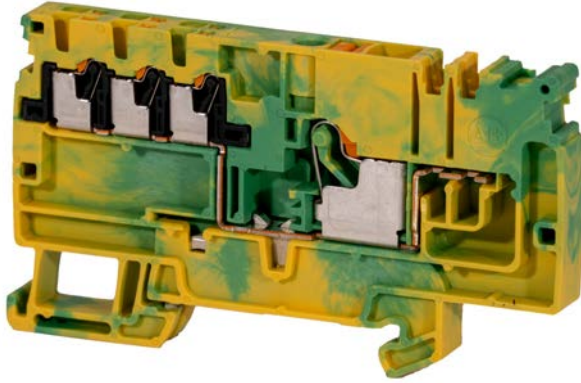1492-PG6PD/6X2

To create full solution pair with end block
1492-P6PD2E-6*.

Terminal Blocks—Dimensions (W x H x L): 8.1 x 47 x 85.5 mm

Color	Cat. No.	Pkg. Qty.
 Grey	1492-PG6PD/6X2	20

Specifications – Control Power Distribution Terminal Block

Certifications	UL / CSA	IEC	ATEX
Voltage Rating	...	...	...
Wire Range (Rated Cross Section)	Line 22...8 AWG Load 26...14 AWG	...	...
Wire Strip Length	0.31 in. (12 mm)		
Density	37 pcs/ft (123 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP6PD2	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP2-2-B	20
3-pole		1492-CJP2-3-B	
4-pole		1492-CJP2-4-B	
5-pole		1492-CJP2-5-B	
6-pole		1492-CJP2-6-B	
7-pole		1492-CJP2-7-B	
8-pole		1492-CJP2-8-B	
9-pole		1492-CJP2-9-B	
10-pole		1492-CJP2-10-B	
20-pole		1492-CJP2-20-B	
50-pole		1492-CJP2-50-B	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR8X10 (84/card)	5 cards
ClearMultiprint Markers	1492-MT8X8 (500/roll)	1 roll

(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP2-2.

Wiring Diagram

IMPORTANT See [page 129](#) for ferrule selection.

1492-P10PD3S-1B



To create full solution pair with end block 1492-P10PD3E-5B.

Terminal Blocks—Dimensions (W x H x L): 10 x 54 x 89 mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P10PD3S-1B	20

Specifications – Control Power Distribution Terminal Block			
Certifications	UL / CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	690V AC/DC
Maximum Current	51 A	57 A	45 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP3-2-B	60
3-pole		1492-CJP3-3-B	20
4-pole		1492-CJP3-4-B	
5-pole		1492-CJP3-5-B	
6-pole		1492-CJP3-6-B	
7-pole		1492-CJP3-7-B	
8-pole		1492-CJP3-8-B	
9-pole		1492-CJP3-9-B	
10-pole		1492-CJP3-10-B	
20-pole		1492-CJP3-20-B	
50-pole		1492-CJP3-50-B	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT10X8 (370/roll)	1 roll


(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2.

(2) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

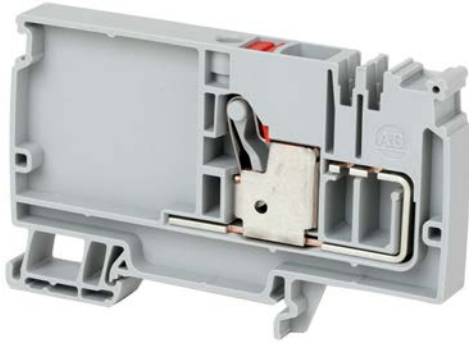1492-P10PD3S-1RE

To create full solution pair with end block
1492-P10PD3E-5RE.

Terminal Blocks—Dimensions (W x H x L): 10 x 54 x 89 mm

Color	Cat. No.	Pkg. Qty.
 Grey	1492-P10PD3S-1RE	20

Specifications – Control Power Distribution Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	690V AC/DC
Maximum Current	51 A	57 A	45 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Mounting Rails, End Barriers, End Anchors and Retainers

Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Center Jumpers⁽¹⁾

2-pole	Red	1492-CJP3-2-RE	60
3-pole		1492-CJP3-3-RE	20
4-pole		1492-CJP3-4-RE	
5-pole		1492-CJP3-5-RE	
6-pole		1492-CJP3-6-RE	
7-pole		1492-CJP3-7-RE	
8-pole		1492-CJP3-8-RE	
9-pole		1492-CJP3-9-RE	
10-pole		1492-CJP3-10-RE	
20-pole		1492-CJP3-20-RE	
50-pole		1492-CJP3-50-RE	

Test Plugs


Test Plugs	Start Test Plug	1492-PTPS	50
------------	-----------------	-----------	----

Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾	1492-MR5X8 (120/card)	5 cards
ClearMultiPrint Markers	1492-MT10X8 (370/roll)	1 roll


(1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2.

(2) Two marker card markers per terminal block are required.

Wiring Diagram

IMPORTANT See [page 133](#) for ferrule selection.

1492-PG10PD3S

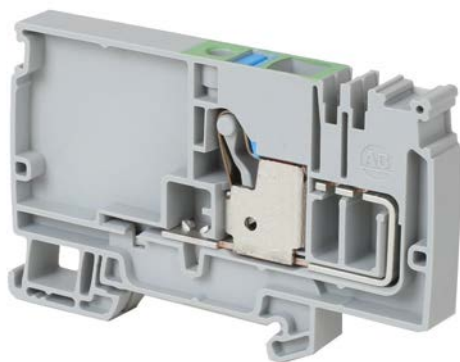

To create full solution pair with end block 1492-P10PD3E-5B.

Terminal Blocks—Dimensions (W x H x L): 10 x 54 x 89 mm

Color	Cat. No.	Pkg. Qty.
 Grey	1492-PG10PD3S	20

Specifications — Control Power Distribution with Grounding Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	690V AC/DC
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2-B	60
3-pole	1492-CJP3-3-B	20
4-pole	1492-CJP3-4-B	
5-pole	1492-CJP3-5-B	
6-pole	1492-CJP3-6-B	
7-pole	1492-CJP3-7-B	
8-pole	1492-CJP3-8-B	
9-pole	1492-CJP3-9-B	
10-pole	1492-CJP3-10-B	
20-pole	1492-CJP3-20-B	
50-pole	1492-CJP3-50-B	

Test Plugs

Test Plugs	Start Test Plug	1492-PTPS	50
------------	-----------------	-----------	----


Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾	1492-MR5X8 (120/card)	5 cards
ClearMultiPrint Markers	1492-MT10X8 (370/roll)	1 roll

(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2.

(2) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD3E- 5B



 To create full solution pair with starter blocks 1492-P10PD3S-5* or 1492-P10PD/4X3*.

Terminal Blocks—Dimensions (W x H x L): 5.1 x 54x 89 mm			
Color ⁽¹⁾		Cat. No.	Pkg. Qty.
	Grey	1492-P10PD3E-5B	50
	White	1492-P10PD3E-5W	50
	Blue	1492-P10PD3E-5BL	50
	Brown	1492-P10PD3E-5BR	50
	Orange	1492-P10PD3E-5OR	50

(1) Catalog number suffix refers to pusher color: -B = Blue, -W= White, -BL = Black, -BR = Brown, -OR = Orange.


Specifications – Control Power Distribution Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	690V AC/DC
Maximum Current	20 A	24 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP3-2-B	60
3-pole		1492-CJP3-3-B	20
4-pole		1492-CJP3-4-B	
5-pole		1492-CJP3-5-B	
6-pole		1492-CJP3-6-B	
7-pole		1492-CJP3-7-B	
8-pole		1492-CJP3-8-B	
9-pole		1492-CJP3-9-B	
10-pole		1492-CJP3-10-B	
20-pole		1492-CJP3-20-B	
50-pole	1492-CJP3-50-B		
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2. To order other colors, remove the -B suffix and add the appropriate suffix to the catalog number listed: White = W, Black = BL, Brown = BR. Example for a white 2-pole center jumper, the catalog number will be 1492-CJP3-2-W.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-P10PD3E-5RE

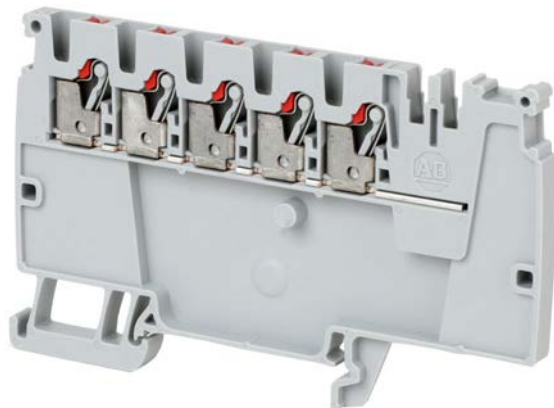

To create full solution pair with starter blocks 1492-P10PD3S-5RE* or 1492-P10PD/4X3-RE.

Terminal Blocks—Dimensions (W x H x L): 5.1 x 54x 89 mm			
Color		Cat. No.	Pkg. Qty.
	Grey	1492-P10PD3E-5RE	50

Specifications — Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	690V AC/DC
Maximum Current	20 A	24 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Red	1492-CJP3-2-RE	60
3-pole		1492-CJP3-3-RE	20
4-pole		1492-CJP3-4-RE	
5-pole		1492-CJP3-5-RE	
6-pole		1492-CJP3-6-RE	
7-pole		1492-CJP3-7-RE	
8-pole		1492-CJP3-8-RE	
9-pole		1492-CJP3-9-RE	
10-pole		1492-CJP3-10-RE	
20-pole		1492-CJP3-20-RE	
50-pole		1492-CJP3-50-RE	


Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

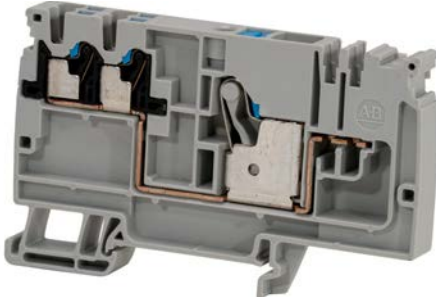1492-P10PD/4X3-B

To create full solution pair with end block 1492-P10PD3E-5*.

Terminal Blocks—Dimensions (W x H x L): 10 x 53.5 x 89 mm

Color ⁽¹⁾	Cat. No.	Pkg. Qty.
 Grey	1492-P10PD/4X3-B	20
	1492-P10PD/4X3-W	
	1492-P10PD/4X3-OR	
	1492-P10PD/4X3-BR	
	1492-P10PD/4X3-BL	

(1) Catalog number suffix refers to pusher color: -B = Blue, -W = White, -BL = Black, -BR = Brown, -OR = Orange.

Specifications — Control Power Distribution Fuse Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	...	...
Maximum Current	55 A	...	...
Wire Range (Rated Cross Section)	Line 20...6 AWG Load 28...12 AWG	...	...
Wire Strip Length	0.70 in. (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2-B	60
3-pole	1492-CJP3-3-B	20
4-pole	1492-CJP3-4-B	
5-pole	1492-CJP3-5-B	
6-pole	1492-CJP3-6-B	
7-pole	1492-CJP3-7-B	
8-pole	1492-CJP3-8-B	
9-pole	1492-CJP3-9-B	
10-pole	1492-CJP3-10-B	
20-pole	1492-CJP3-20-B	
50-pole	1492-CJP3-50-B	


Test Plugs

Test Plugs	Start Test Plug	1492-PTPS	50
------------	-----------------	-----------	----

Marking Systems


ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾	1492-MR5X8 (120/card)	5 cards
ClearMultiPrint Markers	1492-MT10X8 (370/roll)	1 roll

- (1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2. To order other colors, remove the -B suffix and add the appropriate suffix to the catalog number listed: White = W, Black = BL, Brown = BR. Example for a white 2-pole center jumper, the catalog number will be 1492-CJP3-2-W.
- (2) Two marker card markers per terminal block are required.

Wiring Diagram

IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD/4X3-RE

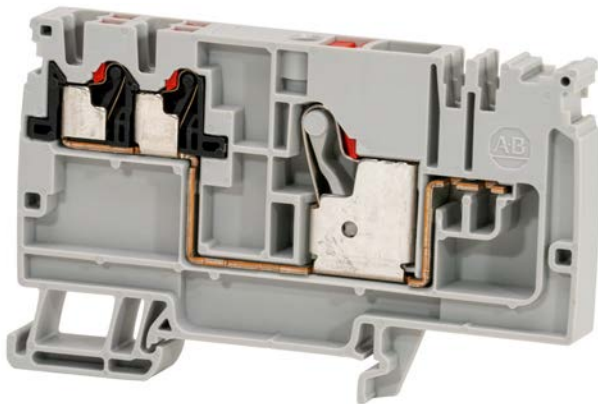

 To create full solution pair with starter block 1492-P10PD3E-5RE.

Terminal Blocks—Dimensions (W x H x L): 10 x 53.5 x 89 mm			
Color		Cat. No.	Pkg. Qty.
	Grey	1492-P10PD/4X3-RE	20


Specifications – Control Power Distribution Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	...	...
Maximum Current	55 A	...	...
Wire Range (Rated Cross Section)	Line 20...6 AWG Load 28...12 AWG	...	...
Wire Strip Length	0.71 (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Red	1492-CJP3-2-RE	60
3-pole		1492-CJP3-3-RE	20
4-pole		1492-CJP3-4-RE	
5-pole		1492-CJP3-5-RE	
6-pole		1492-CJP3-6-RE	
7-pole		1492-CJP3-7-RE	
8-pole		1492-CJP3-8-RE	
9-pole		1492-CJP3-9-RE	
10-pole		1492-CJP3-10-RE	
20-pole		1492-CJP3-20-RE	
50-pole	1492-CJP3-50-RE		
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT10X8 (370/roll)	1 roll

(1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2.
(2) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

1492-PG10PD/4X3

To create full solution pair with end block
1492-P10PD3E-5*

Terminal Blocks—Dimensions (W x H x L): 10 x 53.5 x 89 mm

Color	Cat. No.	Pkg. Qty.
 Green/Yellow	1492-PG10PD/4X3	20

Specifications – Control Power Distribution Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	...	...	...
Wire Range (Rated Cross Section)	Line 20...6 AWG Load 28...12 AWG	...	...
Wire Strip Length	0.71 (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2-B	60
3-pole	1492-CJP3-3-B	20
4-pole	1492-CJP3-4-B	
5-pole	1492-CJP3-5-B	
6-pole	1492-CJP3-6-B	
7-pole	1492-CJP3-7-B	
8-pole	1492-CJP3-8-B	
9-pole	1492-CJP3-9-B	
10-pole	1492-CJP3-10-B	
20-pole	1492-CJP3-20-B	
50-pole	1492-CJP3-50-B	

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50


Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾		1492-MR5X8 (120/card)	5 cards
ClearMultiPrint Markers		1492-MT10X8 (370/roll)	1 roll

(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2.

(2) Two marker card markers per terminal block are required.

Wiring Diagram

IMPORTANT See [page 133](#) for ferrule selection.

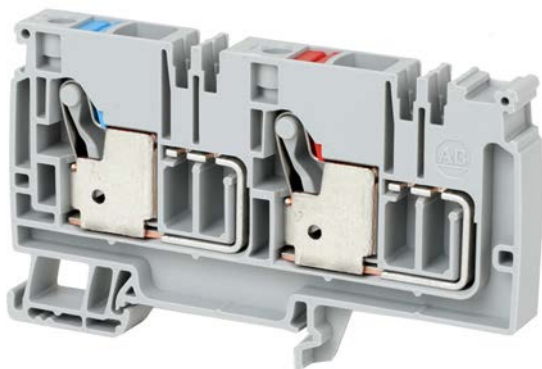1492-P10PD3S-1B1RE

To create full solution pair with end block
1492-P10PD3S-2B2RE.

Terminal Blocks—Dimensions (W x H x L): 10 x 54 x 94 mm		
Color	Cat. No.	Pkg. Qty.
■ Grey	1492-P10PD3S-1B1RE	20

Specifications — Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	500V AC/DC	352V AC/DC
Maximum Current	51 A	41 A	45 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3-BRE	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP3-2-B	60
	Red	1492-CJP3-2-RE	60
3-pole	Blue	1492-CJP3-3-B	20
	Red	1492-CJP3-3-RE	20
4-pole	Blue	1492-CJP3-4-B	20
	Red	1492-CJP3-4-RE	20
5-pole	Blue	1492-CJP3-5-B	20
	Red	1492-CJP3-5-RE	20
6-pole	Blue	1492-CJP3-6-B	20
	Red	1492-CJP3-6-RE	20
7-pole	Blue	1492-CJP3-7-B	20
	Red	1492-CJP3-7-RE	20
8-pole	Blue	1492-CJP3-8-B	20
	Red	1492-CJP3-8-RE	20
9-pole	Blue	1492-CJP3-9-B	20
	Red	1492-CJP3-9-RE	20
10-pole	Blue	1492-CJP3-10-B	20
	Red	1492-CJP3-10-RE	20
20-pole	Blue	1492-CJP3-20-B	20
	Red	1492-CJP3-20-RE	20
50-pole	Blue	1492-CJP3-50-B	20
	Red	1492-CJP3-50-RE	20

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50


Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT10X8 (370/roll)	1 roll

- (1) Available in orange, to order remove the -B or RE suffix from the catalog number.
Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2.
- (2) Two marker card markers per terminal block are required.

Wiring Diagram

IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD3S-1RE1G

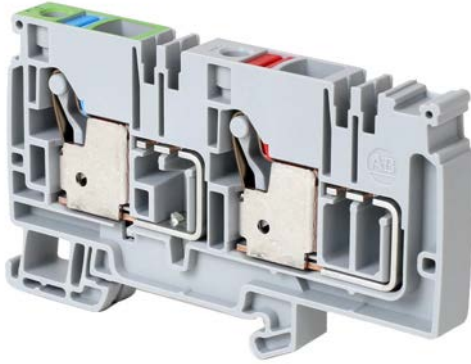

To create full solution pair with end block
1492-P10PD3E-2B2RE.

Terminal Blocks—Dimensions (W x H x L): 10 x 54 x 94 mm

Color	Cat. No.	Pkg. Qty.
Grey	1492-P10PD3S-1RE1G	20

Specifications – Control Power Distribution with Grounding Terminal Block

Certifications	UL / CSA	IEC	ATEX
Voltage Rating	600V AC/DC	500V AC/DC	352V AC/DC
Maximum Current	51 A	41 A	45 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	30 pcs/ft (100 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Mounting Rails, End Barriers, End Anchors and Retainers

Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3-BRE	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾			
2-pole	Blue	1492-CJP3-2-B	60
	Red	1492-CJP3-2-RE	60
3-pole	Blue	1492-CJP3-3-B	20
	Red	1492-CJP3-3-RE	20
4-pole	Blue	1492-CJP3-4-B	20
	Red	1492-CJP3-4-RE	20
5-pole	Blue	1492-CJP3-5-B	20
	Red	1492-CJP3-5-RE	20
6-pole	Blue	1492-CJP3-6-B	20
	Red	1492-CJP3-6-RE	20
7-pole	Blue	1492-CJP3-7-B	20
	Red	1492-CJP3-7-RE	20
8-pole	Blue	1492-CJP3-8-B	20
	Red	1492-CJP3-8-RE	20
9-pole	Blue	1492-CJP3-9-B	20
	Red	1492-CJP3-9-RE	20
10-pole	Blue	1492-CJP3-10-B	20
	Red	1492-CJP3-10-RE	20
20-pole	Blue	1492-CJP3-20-B	20
	Red	1492-CJP3-20-RE	20
50-pole	Blue	1492-CJP3-50-B	20
	Red	1492-CJP3-50-RE	20

Test Plugs

Test Plugs	Start Test Plug	1492-PTPS	50
------------	-----------------	-----------	----

Marking Systems


ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT10X8 (370/roll)	1 roll

(1) Available in orange, to order remove the -B or RE suffix from the catalog number.

Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2.


(2) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD3E-2B2RE

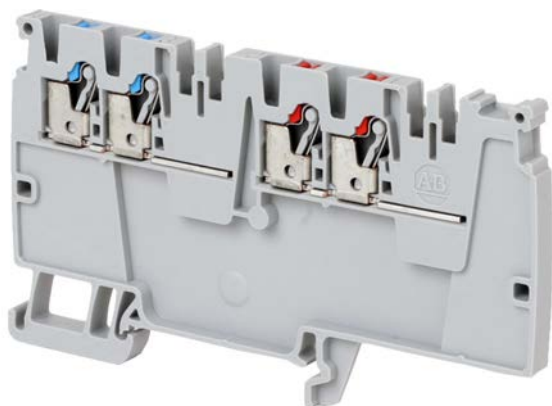

To create full solution pair with starter block 1492-P10PD3S*.

Terminal Blocks—Dimensions (W x H x L): 5.1 x 54 x 94 mm			
Color		Cat. No.	Pkg. Qty.
	Grey	1492-P10PD3E-2B2RE	20

Specifications — Control Power Distribution Terminal Block			
Certifications	UL / CSA	IEC	ATEX
Voltage Rating	150V AC/DC	500V AC/DC	352V AC/DC
Current Rating	20 A	24 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD3-BRE	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP3-2-B	60
	Red	1492-CJP3-2-RE	60
3-pole	Blue	1492-CJP3-3-B	20
	Red	1492-CJP3-3-RE	20
4-pole	Blue	1492-CJP3-4-B	20
	Red	1492-CJP3-4-RE	20
5-pole	Blue	1492-CJP3-5-B	20
	Red	1492-CJP3-5-RE	20
6-pole	Blue	1492-CJP3-6-B	20
	Red	1492-CJP3-6-RE	20
7-pole	Blue	1492-CJP3-7-B	20
	Red	1492-CJP3-7-RE	20
8-pole	Blue	1492-CJP3-8-B	20
	Red	1492-CJP3-8-RE	20
9-pole	Blue	1492-CJP3-9-B	20
	Red	1492-CJP3-9-RE	20
10-pole	Blue	1492-CJP3-10-B	20
	Red	1492-CJP3-10-RE	20
20-pole	Blue	1492-CJP3-20-B	20
	Red	1492-CJP3-20-RE	20
50-pole	Blue	1492-CJP3-50-B	20
	Red	1492-CJP3-50-RE	20

Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiPrint Markers	1492-MT5X8 (800/roll)	1 roll


(1) Available in orange, to order remove the -B or RE suffix from the catalog number.
Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP3-2.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-P10PD4S-1B

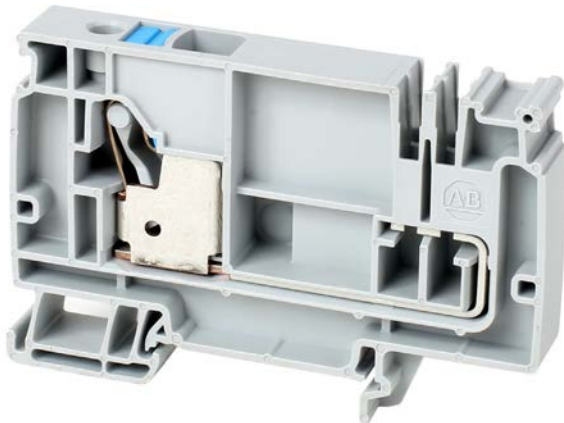

 To create full solution pair with end block 1492-P10PD4E-1B.

Terminal Blocks—Dimensions (W x H x L): 12 x 53.5 x 82 mm			
Color		Cat. No.	Pkg. Qty.
 Grey		1492-P10PD4S-1B	20


Specifications — Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	250V AC/DC	250V AC/DC
Maximum Current	51 A	57 A	57 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP4-2-B	60
3-pole		1492-CJP4-3-B	20
4-pole		1492-CJP4-4-B	
5-pole		1492-CJP4-5-B	
6-pole		1492-CJP4-6-B	
7-pole		1492-CJP4-7-B	
8-pole		1492-CJP4-8-B	
9-pole		1492-CJP4-9-B	
10-pole		1492-CJP4-10-B	
50-pole		1492-CJP4-50-B	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾		1492-MR6X8 (120/card)	5 cards
ClearMultiPrint Markers		1492-MT12X8 (320/roll)	1 roll


- (1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.
- (2) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD4S-1RE

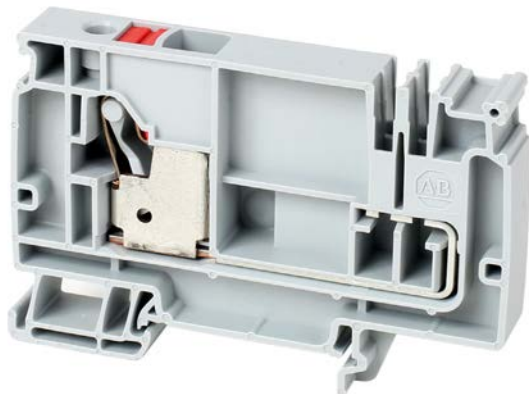

To create full solution pair with starter block 1492-P10PD4E-1RE.

Terminal Blocks—Dimensions (W x H x L): 12 x 53.5 x 82 mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P10PD4S-1RE	20


Specifications — Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	250V AC/DC	250V AC/DC
Maximum Current	51 A	57 A	6.3 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Red	1492-CJP4-2-RE	60
3-pole		1492-CJP4-3-RE	20
4-pole		1492-CJP4-4-RE	
5-pole		1492-CJP4-5-RE	
6-pole		1492-CJP4-6-RE	
7-pole		1492-CJP4-7-RE	
8-pole		1492-CJP4-8-RE	
9-pole		1492-CJP4-9-RE	
10-pole		1492-CJP4-10-RE	
50-pole		1492-CJP4-50-RE	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT12X8 (320/roll)	1 roll


- (1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.
- (2) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

1492-PG10PD4S

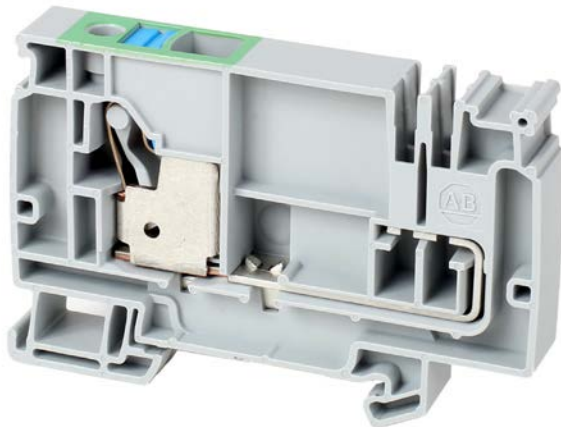

 To create full solution pair with starter block 1492-P10PD4E-1B.

Terminal Blocks—Dimensions (W x H x L): 12 x 53.5 x 82 mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-PG10PD4S	20


Specifications – Control Power Distribution with Grounding Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	250V AC/DC	250V AC/DC
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP4-2-B	60
3-pole		1492-CJP4-3-B	20
4-pole		1492-CJP4-4-B	
5-pole		1492-CJP4-5-B	
6-pole		1492-CJP4-6-B	
7-pole		1492-CJP4-7-B	
8-pole		1492-CJP4-8-B	
9-pole		1492-CJP4-9-B	
10-pole		1492-CJP4-10-B	
50-pole		1492-CJP4-50-B	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾		1492-MR6X8 (120/card)	5 cards
ClearMultiPrint Markers		1492-MT12X8 (320/roll)	1 roll


- (1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.
- (2) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD4E-1B

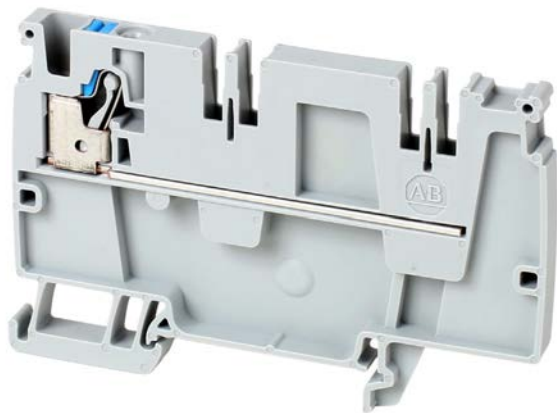

 To create full solution pair with starter block 1492-P10PD4S-1B.

Terminal Blocks—Dimensions (W x H x L): 6.1 x 53.5 x 82 mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P10PD4E-1B	50

Specifications — Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	250V AC/DC	250V AC/DC
Maximum Current	20 A	32 A	32 A
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP4-2-B	60
3-pole		1492-CJP4-3-B	20
4-pole		1492-CJP4-4-B	
5-pole		1492-CJP4-5-B	
6-pole		1492-CJP4-6-B	
7-pole		1492-CJP4-7-B	
8-pole		1492-CJP4-8-B	
9-pole		1492-CJP4-9-B	
10-pole		1492-CJP4-10-B	
50-pole		1492-CJP4-50-B	5
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll

(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

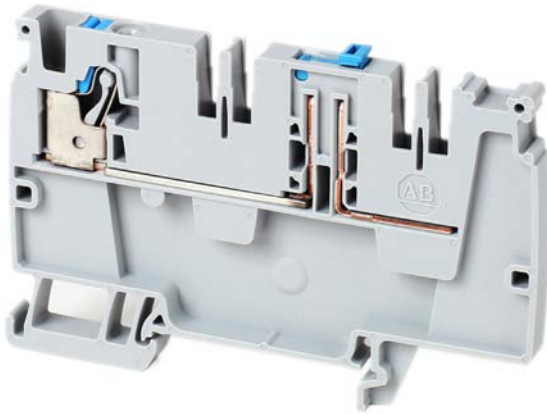1492-P10PD4E-KD

To create full solution pair with starter block 1492-P10PD4S-1B.

Terminal Blocks—Dimensions (W x H x L): 6.1 x 55 x 82 mm			
Color	Cat. No.	Pkg. Qty.	
 Grey	1492-P10PD4E-KD	50	

Specifications — Control Power Distribution Disconnect Terminal Block			
Certifications	UL / CSA	IEC	ATEX
Voltage Rating	300V AC/DC	250V AC/DC	250V AC/DC
Maximum Current	20 A	20 A	20 A
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP4-2-B	60
3-pole		1492-CJP4-3-B	20
4-pole		1492-CJP4-4-B	
5-pole		1492-CJP4-5-B	
6-pole		1492-CJP4-6-B	
7-pole		1492-CJP4-7-B	
8-pole		1492-CJP4-8-B	
9-pole		1492-CJP4-9-B	
10-pole		1492-CJP4-10-B	
50-pole		1492-CJP4-50-B	5
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll

(1) Available in orange, to order remove the -B suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.

Wiring Diagram

IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD4E-1RE

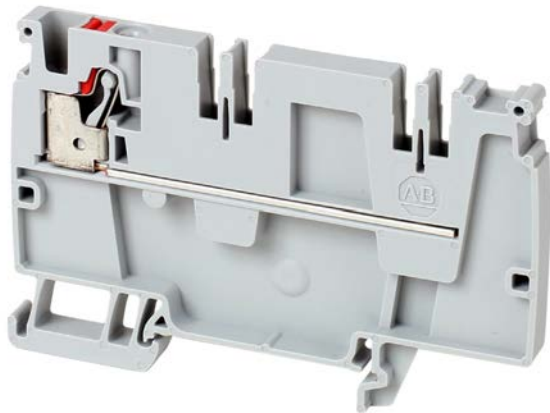

To create full solution pair with starter block 1492-P10PD4S-1RE.

Terminal Blocks—Dimensions (W x H x L): 6.1 x 53.5 x 82 mm			
Color		Cat. No.	Pkg. Qty.
 Grey		1492-P10PD4E-1RE	50

Specifications – Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	300V AC/DC	250V AC/DC	250V AC/DC
Maximum Current	20 A	32 A	32 A
Wire Range (Rated Cross Section)	26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Red	1492-CJP4-2-RE	60
3-pole		1492-CJP4-3-RE	20
4-pole		1492-CJP4-4-RE	
5-pole		1492-CJP4-5-RE	
6-pole		1492-CJP4-6-RE	
7-pole		1492-CJP4-7-RE	
8-pole		1492-CJP4-8-RE	
9-pole		1492-CJP4-9-RE	
10-pole		1492-CJP4-10-RE	
50-pole		1492-CJP4-50-RE	5
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll

(1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD4E-FB



To create full solution pair with starter block 1492-P10PD4S-1RE.

Terminal Blocks—Dimensions (W x H x L): 6.1 x 82 x 82 mm			
Color	Includes LED for Blown Fuse Indication	Cat. No.	Pkg. Qty.
	No	1492-P10PD4E-FB	50
	Yes	1492-P10PD4E-FB24	
		1492-P10PD4E-FB48	
		1492-P10PD4E-FB120	
		1492-P10PD4E-FB250	

Specifications – Control Power Distribution Fuse Terminal Block				
Certifications		UL /CSA	IEC	ATEX
Voltage Rating	1492-P10PD4E-FB	300V AC/DC	250V AC/DC	250V AC/DC
	1492-P10PD4E-FB24	10...36V AC/DC		
	1492-P10PD4E-FB48	30...70V AC/DC		
	1492-P10PD4E-FB120	60...150V AC/DC		
	1492-P10PD4E-FB250	100...250V AC/DC		
Maximum Current		10 A	6.3 A	6.3 A
Wire Range (Rated Cross Section)		26...10 AWG	4 mm ²	4 mm ²
Wire Strip Length		0.47 in. (12 mm)		
Density		49 pcs/ft (163 pcs/m)		
Housing Temperature Range		-76...266°F (-60...130 °C)		
Fuse Size		5 x 20 mm		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50



Accessories	Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾		
2-pole	1492-CJP4-2-RE	60
3-pole	1492-CJP4-3-RE	20
4-pole	1492-CJP4-4-RE	
5-pole	1492-CJP4-5-RE	
6-pole	1492-CJP4-6-RE	
7-pole	1492-CJP4-7-RE	
8-pole	1492-CJP4-8-RE	
9-pole	1492-CJP4-9-RE	
10-pole	1492-CJP4-10-RE	5
50-pole	1492-CJP4-50-RE	

Marking Systems


ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll

(1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.

Wiring Diagram



IMPORTANT See [page 132](#) for ferrule selection.

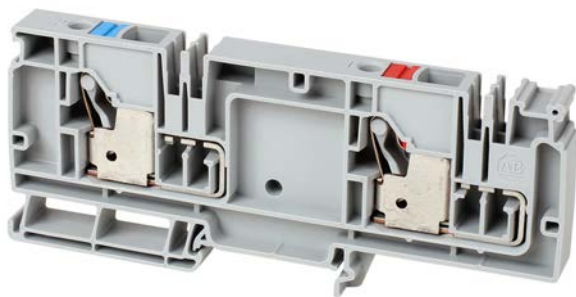1492-P10PD4S-1B1RE

To create full solution pair with end block
1492-P10PD4E-1B1FB.

Terminal Blocks—Dimensions (W x H x L): 12 x 53.5 x 129 mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P10PD4S-1B1RE	20

Specifications — Control Power Distribution Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	250V AC/DC
Maximum Current	51 A	57 A	31.5 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4-BRE	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.	
Center Jumpers ⁽¹⁾				
2-pole	Blue	1492-CJP4-2-B	60	
	Red	1492-CJP4-2-RE		
3-pole	Blue	1492-CJP4-3-B	20	
	Red	1492-CJP4-3-RE		
4-pole	Blue	1492-CJP4-4-B		
	Red	1492-CJP4-4-RE		
5-pole	Blue	1492-CJP4-5-B		
	Red	1492-CJP4-5-RE		
6-pole	Blue	1492-CJP4-6-B		
	Red	1492-CJP4-6-RE		
7-pole	Blue	1492-CJP4-7-B		
	Red	1492-CJP4-7-RE		
8-pole	Blue	1492-CJP4-8-B		
	Red	1492-CJP4-8-RE		
9-pole	Blue	1492-CJP4-9-B		
	Red	1492-CJP4-9-RE		
10-pole	Blue	1492-CJP4-10-B		
	Red	1492-CJP4-10-RE		
50-pole	Blue	1492-CJP4-50-B		5
	Red	1492-CJP4-50-RE		

Test Plugs

Test Plugs	Start Test Plug	1492-PTPS	50
------------	-----------------	-----------	----

Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾	1492-MR6X8 (120/card)	5 cards
ClearMultiPrint Markers	1492-MT12X8 (320/roll)	1 roll


(1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.

(2) Two marker card markers per terminal block are required.

Wiring Diagram

IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD4S-1RE1G

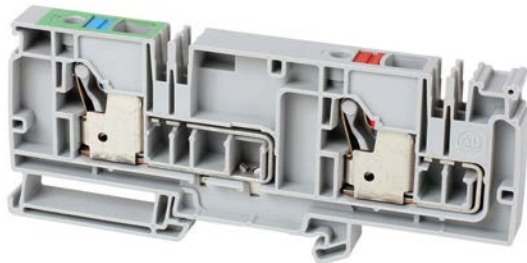

To create full solution pair with end block 1492-P10PD4E-1B1FB.

Terminal Blocks—Dimensions (W x H x L): 12 x 53.5 x 129 mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P10PD4S-1RE1G	20


Specifications – Control Power Distribution with Grounding Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	250V AC/DC	250V AC/DC
Maximum Current	51 A	17 A	31.5 A
Wire Range (Rated Cross Section)	20...6 AWG	10 mm ²	10 mm ²
Wire Strip Length	0.71 in. (18 mm)		
Density	25 pcs/ft (83 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4-BRE	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP4-2-B	60
	Red	1492-CJP4-2-RE	
3-pole	Blue	1492-CJP4-3-B	20
	Red	1492-CJP4-3-RE	
4-pole	Blue	1492-CJP4-4-B	
	Red	1492-CJP4-4-RE	
5-pole	Blue	1492-CJP4-5-B	
	Red	1492-CJP4-5-RE	
6-pole	Blue	1492-CJP4-6-B	
	Red	1492-CJP4-6-RE	
7-pole	Blue	1492-CJP4-7-B	
	Red	1492-CJP4-7-RE	
8-pole	Blue	1492-CJP4-8-B	
	Red	1492-CJP4-8-RE	
9-pole	Blue	1492-CJP4-9-B	
	Red	1492-CJP4-9-RE	
10-pole	Blue	1492-CJP4-10-B	
	Red	1492-CJP4-10-RE	
50-pole	Blue	1492-CJP4-50-B	5
	Red	1492-CJP4-50-RE	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards ⁽²⁾		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT12X8 (320/roll)	1 roll

- (1) Available in orange, to order remove the -RE suffix from the catalog number. Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.
- (2) Two marker card markers per terminal block are required.

Wiring Diagram



IMPORTANT See [page 133](#) for ferrule selection.

1492-P10PD4E-1B1FB



To create full solution pair with starter block 1492-P10PD4S*.

Terminal Blocks—Dimensions (W x H x L): 6.1 x 82 x 129 mm			
Color	Includes LED for Blown Fuse Indication	Cat. No.	Pkg. Qty.
	No	1492-P10PD4E-1B1FB	50
	Yes	1492-P10PD4E-1B1FB24	
		1492-P10PD4E-1B1FB48	
		1492-P10PD4E-1B1FB120	
		1492-P10PD4E-1B1FB250	

Specifications — Control Power Distribution Fuse Terminal Block			
Certifications		UL /CSA	IEC
Voltage Rating	1492-P10PD4E-1B1FB	300V AC/DC	250V AC/DC
	1492-P10PD4E-1B1FB24	10...36V AC/DC	
	1492-P10PD4E-1B1FB48	30...70V AC/DC	
	1492-P10PD4E-1B1FB120	60...150V AC/DC	
	1492-P10PD4E-1B1FB250	100...250V AC/DC	
Maximum Current		10 A	6.3 A
Wire Range (Rated Cross Section)		26...10 AWG	4 mm ²
Wire Strip Length		0.47 in. (12 mm)	
Density		49 pcs/ft (163 pcs/m)	
Housing Temperature Range		-76...266°F (-60...130 °C)	
Fuse Size		5 x 20 mm	

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP10PD4-BRE	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Blue	1492-CJP4-2-B	60
	Red	1492-CJP4-2-RE	
3-pole	Blue	1492-CJP4-3-B	
	Red	1492-CJP4-3-RE	
4-pole	Blue	1492-CJP4-4-B	
	Red	1492-CJP4-4-RE	
5-pole	Blue	1492-CJP4-5-B	
	Red	1492-CJP4-5-RE	
6-pole	Blue	1492-CJP4-6-B	
	Red	1492-CJP4-6-RE	
7-pole	Blue	1492-CJP4-7-B	20
	Red	1492-CJP4-7-RE	
8-pole	Blue	1492-CJP4-8-B	
	Red	1492-CJP4-8-RE	
9-pole	Blue	1492-CJP4-9-B	
	Red	1492-CJP4-9-RE	
10-pole	Blue	1492-CJP4-10-B	
	Red	1492-CJP4-10-RE	
50-pole	Blue	1492-CJP4-50-B	5
	Red	1492-CJP4-50-RE	

Marking Systems


ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll

(1) Available in orange, to order remove the -B or -RE suffix from the catalog number.
Example for an orange 2-pole center jumper, the catalog number will be 1492-CJP4-2.

Wiring Diagram



No Blown Fuse Indication




With Blown Fuse Indication

IMPORTANT See [page 133](#) for ferrule selection.

Single-level Flex Plug-in Terminal Blocks

1492-P31P

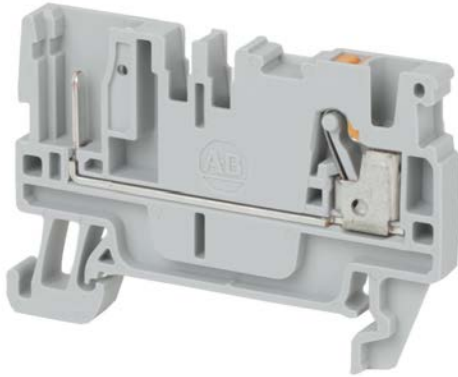

Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5x 55mm

Color	Cat. No.	Pkg. Qty.
Grey	1492-P31P	100
Blue	1492-P31P-B	100

Specifications — Single-level Flex Plug-in Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	800V AC/DC
Maximum Current	20 A	24 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories

Accessories	Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers		
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1
	Aluminum	1492-DR5
	Hi-Rise (Aluminum)	1492-DR6
	Angled (Steel)	1492-DR7
End Barriers	Grey	1492-EBP3
	Blue	1492-EBP3-B
	Yellow	1492-EBP3-Y
End Retainer		1492-ERL35
		1492-ERP35
End Anchor DIN Rail	Normal Duty	1492-EAJ35
	Heavy Duty	1492-EAHJ35
	Normal Duty	1492-EAP35

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	

Plugs and Plug Accessories			
Start Plug ⁽²⁾	Grey	1492-P3SSTP	50
	Blue	1492-P3SSTP-B	
	Green	1492-P3SSTP-G	
Middle Plug	Grey	1492-P3MSTP	
	Blue	1492-P3MSTP-B	
	Green	1492-P3MSTP-G	
End Plug	Grey	1492-P3ESTP	
	Blue	1492-P3ESTP-B	
	Green	1492-P3ESTP-G	
Plug End Barrier	Grey	1492-P3STPEB	
Coding Element	Orange	1492-P3STPCE	
Protective Cover	Orange	1492-P3STPPC	
Locking Element	Orange	1492-P3STPLE	25
Strain Relief	Orange	1492-PSR-1P	25
Strain Relief	Orange	1492-PSR-4P	25
Strain Relief	Orange	1492-PSR-8P	25

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.


(2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PG31P

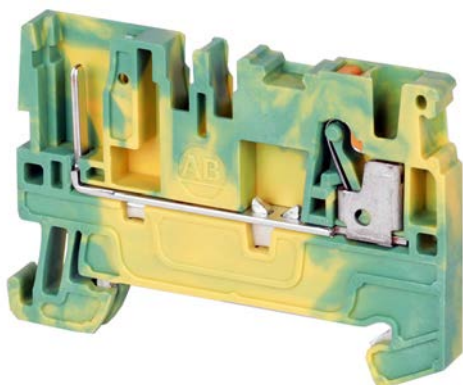

Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 55 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PG31P	100

Specifications – Single-level Flex Plug-in Grounding Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Maximum Voltage	600V AC/DC	800V AC/DC	800V AC/DC
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP3	50
	Blue	1492-EBP3-B	50
	Yellow	1492-EBP3-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	


Plugs and Plug Accessories			
Start Plug ⁽²⁾	Grey	1492-P3SSTP	50
	Blue	1492-P3SSTP-B	
	Green	1492-P3SSTP-G	
Middle Plug	Grey	1492-P3MSTP	
	Blue	1492-P3MSTP-B	
	Green	1492-P3MSTP-G	
End Plug	Grey	1492-P3ESTP	
	Blue	1492-P3ESTP-B	
	Green	1492-P3ESTP-G	
Plug End Barrier	Grey	1492-P3STPEB	
Coding Element	Orange	1492-P3STPCE	
Protective Cover	Orange	1492-P3STPPC	
Locking Element	Orange	1492-P3STPLE	25
Strain Relief	Orange	1492-PSR-1P	25
Strain Relief	Orange	1492-PSR-4P	25
Strain Relief	Orange	1492-PSR-8P	25

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

(2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-P3T1P



Terminal Blocks —Dimensions (W x H x L): 5.1 x 36.5 x 66.5 mm

Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Grey	1492-P3T1P	50	Blue	1492-P3T1P-B	50

Specifications — Single-level Flex Plug-in Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	800V AC/DC
Maximum Current	20 A	24 A	20 A
Wire Range (Rated Cross Section)	28 AWG...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Mounting Rails, End Barriers, End Anchors and Retainers

Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP3T	50
	Blue	1492-EBP3T-B	50
	Yellow	1492-EBP3T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2	60
3-pole	1492-CJP3-3	20
4-pole	1492-CJP3-4	
5-pole	1492-CJP3-5	
6-pole	1492-CJP3-6	
7-pole	1492-CJP3-7	
8-pole	1492-CJP3-8	
9-pole	1492-CJP3-9	
10-pole	1492-CJP3-10	
20-pole	1492-CJP3-20	
50-pole	1492-CJP3-50	

Plugs and Plug Accessories

Start Plug ⁽²⁾	Grey	1492-P3SSTP	50
	Blue	1492-P3SSTP-B	
	Green	1492-P3SSTP-G	
Middle Plug	Grey	1492-P3MSTP	
	Blue	1492-P3MSTP-B	
	Green	1492-P3MSTP-G	
End Plug	Grey	1492-P3ESTP	
	Blue	1492-P3ESTP-B	
	Green	1492-P3ESTP-G	
Plug End Barrier	Grey	1492-P3STPEB	
Coding Element	Orange	1492-P3STPCE	
Protective Cover	Orange	1492-P3STPPC	
Locking Element	Orange	1492-P3STPLE	25
Strain Relief	Orange	1492-PSR-1P	25
Strain Relief	Orange	1492-PSR-4P	25
Strain Relief	Orange	1492-PSR-8P	25


Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

(2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-P3Q2P



Terminal Blocks –Dimensions (W x H x L): 5.1 x 36.5 x 87mm					
Color	Cat. No.	Pkg. Qty.	Color	Cat. No.	Pkg. Qty.
Grey	1492-P3Q2P	50	Blue	1492-P3Q2P-B	50

Specifications – Single-level Flex Plug-in Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	800V AC/DC
Maximum Current	20 A	24 A	24 A
Wire Range (Rated Cross Section)	28 AWG...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP3Q2P	50
	Blue	1492-EBP3Q2P-B	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾		
2-pole	1492-CJP3-2	60
3-pole	1492-CJP3-3	20
4-pole	1492-CJP3-4	
5-pole	1492-CJP3-5	
6-pole	1492-CJP3-6	
7-pole	1492-CJP3-7	
8-pole	1492-CJP3-8	
9-pole	1492-CJP3-9	
10-pole	1492-CJP3-10	
20-pole	1492-CJP3-20	
50-pole	1492-CJP3-50	

Plugs and Plug Accessories			
Start Plug ⁽²⁾	Grey	1492-P3SSTP	50
	Blue	1492-P3SSTP-B	
	Green	1492-P3SSTP-G	
Middle Plug	Grey	1492-P3MSTP	
	Blue	1492-P3MSTP-B	
	Green	1492-P3MSTP-G	
End Plug	Grey	1492-P3ESTP	
	Blue	1492-P3ESTP-B	
	Green	1492-P3ESTP-G	
Plug End Barrier	Grey	1492-P3STPEB	
Coding Element	Orange	1492-P3STPCE	
Protective Cover	Orange	1492-P3STPPC	
Locking Element	Orange	1492-P3STPLE	25
Strain Relief	Orange	1492-PSR-1P	25
Strain Relief	Orange	1492-PSR-4P	25
Strain Relief	Orange	1492-PSR-8P	25

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.


(2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PG3T1P

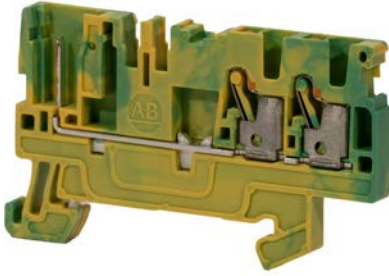

Terminal Blocks –Dimensions (W x H x L): 5.1 x 36.5 x 66.5 mm			
Color	Cat. No.	Pkg. Qty.	
 Green/Yellow	1492-PG3T1P	50	

Specifications – Single-level Flex Plug-in Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	...
Wire Range (Rated Cross Section)	28 AWG...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP3T	50
	Blue	1492-EBP3T-B	50
	Yellow	1492-EBP3T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	


Plugs and Plug Accessories			
Start Plug ⁽²⁾	Grey	1492-P3SSTP	50
	Blue	1492-P3SSTP-B	
	Green	1492-P3SSTP-G	
Middle Plug	Grey	1492-P3MSTP	
	Blue	1492-P3MSTP-B	
	Green	1492-P3MSTP-G	
End Plug	Grey	1492-P3ESTP	
	Blue	1492-P3ESTP-B	
	Green	1492-P3ESTP-G	
Plug End Barrier	Grey	1492-P3STPEB	
Coding Element	Orange	1492-P3STPCE	
Protective Cover	Orange	1492-P3STPPC	
Locking Element	Orange	1492-P3STPLE	25
Strain Relief	Orange	1492-PSR-1P	25
Strain Relief	Orange	1492-PSR-4P	25
Strain Relief	Orange	1492-PSR-8P	25

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

(2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PG3Q2P



Terminal Blocks –Dimensions (W x H x L): 5.1 x 36.5 x 87 mm			
Color	Cat. No.	Pkg. Qty.	
 Green/Yellow	1492-PG3Q2P	50	

Specifications – Single-level Flex Plug-in Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	...
Wire Range (Rated Cross Section)	28 AWG...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP3Q2P	50
	Blue	1492-EBP3Q2P-B	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	


Plugs and Plug Accessories			
Start Plug ⁽²⁾	Grey	1492-P3SSTP	50
	Blue	1492-P3SSTP-B	
	Green	1492-P3SSTP-G	
Middle Plug	Grey	1492-P3MSTP	
	Blue	1492-P3MSTP-B	
	Green	1492-P3MSTP-G	
End Plug	Grey	1492-P3ESTP	
	Blue	1492-P3ESTP-B	
	Green	1492-P3ESTP-G	
Plug End Barrier	Grey	1492-P3STPEB	
Coding Element	Orange	1492-P3STPCE	
Protective Cover	Orange	1492-P3STPPC	
Locking Element	Orange	1492-P3STPLE	25
Strain Relief	Orange	1492-PSR-1P	25
Strain Relief	Orange	1492-PSR-4P	25
Strain Relief	Orange	1492-PSR-8P	25

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

(2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.


Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

Double-level Flex Plug-in Terminal Blocks

1492-PD32P

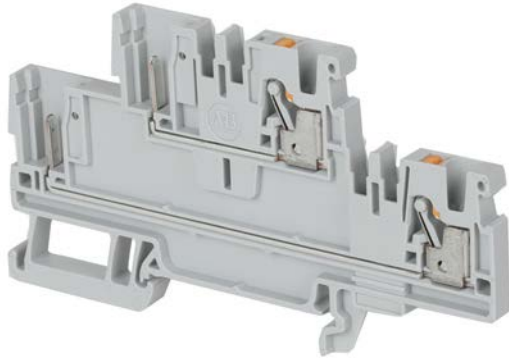

Terminal Blocks—Dimensions (W x H x L): 5.1 x 50.5 x 91 mm

Color	Cat. No.	Pkg. Qty.
Grey	1492-PD32P	50
Blue	1492-PD32P-B	50

Specifications — Double-level Flex Plug-in Terminal Block

Certifications	UL / CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	800V AC/DC
Maximum Current	20 A	24 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPD3	20
	Blue	1492-EBPD3-B	20
	Yellow	1492-EBPD3-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾		
2-pole	1492-CJP3-2	60
3-pole	1492-CJP3-3	20
4-pole	1492-CJP3-4	
5-pole	1492-CJP3-5	
6-pole	1492-CJP3-6	
7-pole	1492-CJP3-7	
8-pole	1492-CJP3-8	
9-pole	1492-CJP3-9	
10-pole	1492-CJP3-10	
20-pole	1492-CJP3-20	
50-pole	1492-CJP3-50	

Plugs and Plug Accessories

Start Plug ⁽²⁾	Grey	1492-P3SSTP	50
	Blue	1492-P3SSTP-B	
	Green	1492-P3SSTP-G	
Middle Plug	Grey	1492-P3MSTP	
	Blue	1492-P3MSTP-B	
	Green	1492-P3MSTP-G	
End Plug	Grey	1492-P3ESTP	
	Blue	1492-P3ESTP-B	
	Green	1492-P3ESTP-G	
Plug End Barrier	Grey	1492-P3STPEB	
Coding Element	Orange	1492-P3STPCE	
Protective Cover	Orange	1492-P3STPPC	
Locking Element	Orange	1492-P3STPLE	25
Strain Relief	Orange	1492-PSR-1P	25
Strain Relief	Orange	1492-PSR-4P	25
Strain Relief	Orange	1492-PSR-8P	25


Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.


(2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PD32PC

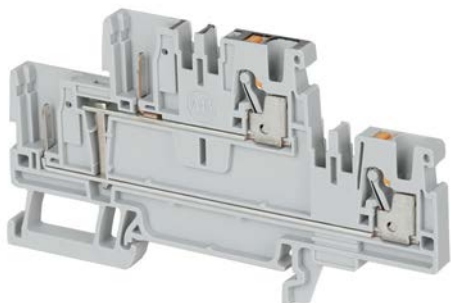

Terminal Blocks—Dimensions (W x H x L): 5.1 x 50.5 x 91 mm			
Color		Cat. No.	Pkg. Qty.
	Grey	1492-PD32PC	50
	Blue	1492-PD32PC-B	50
Specifications — Double-level Flex Plug-in Terminal Block			
Certifications	UL / CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	800V AC/DC
Maximum Current	20 A	24 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPD3	20
	Blue	1492-EBPD3-B	20
	Yellow	1492-EBPD3-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	

Plugs and Plug Accessories			
Start Plug ⁽²⁾	Grey	1492-P3SSTP	
	Blue	1492-P3SSTP-B	
	Green	1492-P3SSTP-G	
Middle Plug	Grey	1492-P3MSTP	50
	Blue	1492-P3MSTP-B	
	Green	1492-P3MSTP-G	
End Plug	Grey	1492-P3ESTP	
	Blue	1492-P3ESTP-B	
	Green	1492-P3ESTP-G	
Plug End Barrier	Grey	1492-P3STPEB	
Coding Element	Orange	1492-P3STPCE	
Protective Cover	Orange	1492-P3STPPC	
Locking Element	Orange	1492-P3STPLE	25
Strain Relief	Orange	1492-PSR-1P	25
Strain Relief	Orange	1492-PSR-4P	25
Strain Relief	Orange	1492-PSR-8P	25

Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll


- (1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.
- (2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PDG32P

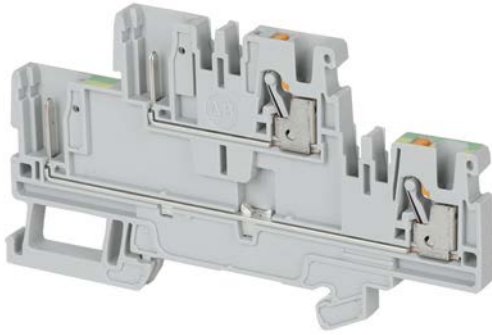

Terminal Blocks—Dimensions (W x H x L): 5.1 x 50.5 x 91 mm			
Color	Cat. No.	Pkg. Qty.	
Grey	1492-PDG32P	50	
Specifications — Double-level Flex Plug-in with Grounding Terminal Block			
Certifications	UL / CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	800V AC/DC
Maximum Current	20 A	24 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		
Accessories	Cat. No.	Pkg. Qty.	
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPD3	20
	Blue	1492-EBPD3-B	20
	Yellow	1492-EBPD3-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.	
Center Jumpers ⁽¹⁾				
2-pole	Orange	1492-CJP3-2	60	
3-pole		1492-CJP3-3	20	
4-pole		1492-CJP3-4		
5-pole		1492-CJP3-5		
6-pole		1492-CJP3-6		
7-pole		1492-CJP3-7		
8-pole		1492-CJP3-8		
9-pole		1492-CJP3-9		
10-pole		1492-CJP3-10		
20-pole		1492-CJP3-20		
50-pole		1492-CJP3-50		
Plugs and Plug Accessories				
Start Plug ⁽²⁾	Grey	1492-P3SSTP	50	
	Blue	1492-P3SSTP-B		
	Green	1492-P3SSTP-G		
Middle Plug	Grey	1492-P3MSTP		
	Blue	1492-P3MSTP-B		
	Green	1492-P3MSTP-G		
End Plug	Grey	1492-P3ESTP		
	Blue	1492-P3ESTP-B		
	Green	1492-P3ESTP-G		
Plug End Barrier	Grey	1492-P3STPEB		
Coding Element	Orange	1492-P3STPCE		
Protective Cover	Orange	1492-P3STPPC		
Locking Element	Orange	1492-P3STPLE	25	
Strain Relief	Orange	1492-PSR-1P	25	
Strain Relief	Orange	1492-PSR-4P	25	
Strain Relief	Orange	1492-PSR-8P	25	

Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll


- (1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.
- (2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-PDG32PC

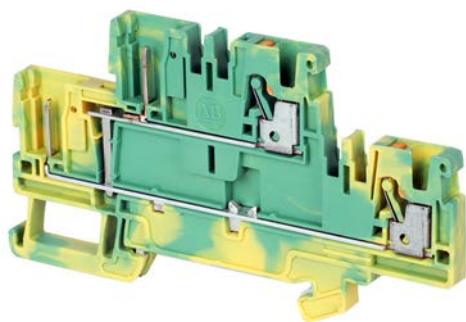


Terminal Blocks—Dimensions (W x H x L): 5.1 x 50.5 x 91 mm			
Color		Cat. No.	Pkg. Qty.
	Green/Yellow	1492-PDG32PC	50
Specifications —Double-level Flex Plug-in with Grounding Terminal Block			
Certifications	 /CSA	IEC	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	800V AC/DC
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²	2.5 mm ²
Wire Strip Length	0.4 in (10 mm)		
Density	59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-76...266°F (-60...130 °C)		
Accessories			
Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPD3	20
	Blue	1492-EBPD3-B	20
	Yellow	1492-EBPD3-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Plugs and Plug Accessories			
Start Plug ⁽²⁾	Grey	1492-P3SSTP	50
	Blue	1492-P3SSTP-B	
	Green	1492-P3SSTP-G	
Middle Plug	Grey	1492-P3MSTP	
	Blue	1492-P3MSTP-B	
	Green	1492-P3MSTP-G	
End Plug	Grey	1492-P3ESTP	
	Blue	1492-P3ESTP-B	
	Green	1492-P3ESTP-G	
Plug End Barrier	Grey	1492-P3STPEB	
Coding Element	Orange	1492-P3STPCE	
Protective Cover	Orange	1492-P3STPPC	
Locking Element	Orange	1492-P3STPLE	25
Strain Relief	Orange	1492-PSR-1P	25
Strain Relief	Orange	1492-PSR-4P	25
Strain Relief	Orange	1492-PSR-8P	25
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

(2) Assembly option available, order catalog number: 1492-P3STP for (1) start plug and (1) plug end barrier.

Wiring Diagram




IMPORTANT See [page 130](#) for ferrule selection.

Notes:

Accessory Plug-in Terminal Blocks

1492-P3P

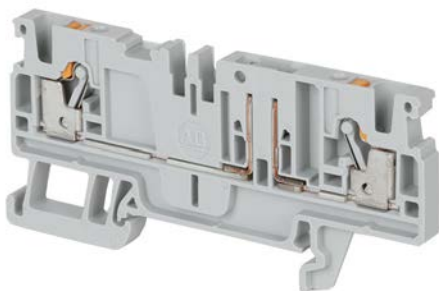

Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 77.5mm

Color	Cat. No.	Pkg. Qty.
 Grey	1492-P3P	50

Specifications — Accessory Plug-in Terminal Block

Certifications	UL /CSA	IEC
Voltage Rating	300V AC/DC	500V AC/DC
Maximum Current	20 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)	
Density	59 pcs/ft (196 pcs/m)	
Housing Temperature Range	-76...266°F (-60...130 °C)	

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP3Q	20
	Blue	1492-EBP3Q-B	20
	Yellow	1492-EBP3Q-Y	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	

Disconnect, Component, and Fuse Plugs

Disconnect Plug		1492-DPL	50
Component Plug		1492-CPL	50
Fuse Plugs	Without blown fuse indicator	1492-FPK2	20
	10...36V blown fuse indicator	1492-FPK224	20
	35...75V blown fuse indicator	1492-FPK248	20
	60...150V blown fuse indicator	1492-FPK2120	20
	140...250V blown fuse indicator	1492-FPK2250	20

Test Plugs

Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50

Marking Systems

ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-P3PT

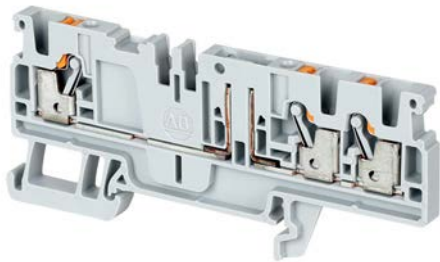

Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 84.5mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P3PT	50

Specifications — Accessory Plug-in Terminal Block		
Certifications	UL /CSA	IEC
Voltage Rating	300V AC/DC	500V AC/DC
Maximum Current	20 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)	
Density	59 pcs/ft (196 pcs/m)	
Housing Temperature Range	-76...266°F (-60...130 °C)	

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPKD3T	50
	Blue	1492-EBPKD3T-B	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	


Disconnect, Component, and Fuse Plugs			
Disconnect Plug		1492-DPL	50
Component Plug		1492-CPL	50
Fuse Plugs	Without blown fuse indicator	1492-FPK2	20
	10...36V blown fuse indicator	1492-FPK224	20
	35...75V blown fuse indicator	1492-FPK248	20
	60...150V blown fuse indicator	1492-FPK2120	20
	140...250V blown fuse indicator	1492-FPK2250	20

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

1492-P3PQ



Terminal Blocks—Dimensions (W x H x L): 5.1 x 36.5 x 96mm		
Color	Cat. No.	Pkg. Qty.
 Grey	1492-P3PQ	50

Specifications — Accessory Plug-in Terminal Block		
Certifications	UL /CSA	IEC
Voltage Rating	300V AC/DC	500V AC/DC
Maximum Current	20 A	20 A
Wire Range (Rated Cross Section)	28...12 AWG	2.5 mm ²
Wire Strip Length	0.4 in. (10 mm)	
Density	59 pcs/ft (196 pcs/m)	
Housing Temperature Range	-76...266°F (-60...130 °C)	

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Barriers	Grey	1492-EBPKD3Q	50
	Blue	1492-EBPKD3Q-B	50
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	

Disconnect, Component, and Fuse Plugs			
Disconnect Plug		1492-DPL	50
Component Plug		1492-CPL	50
Fuse Plugs	Without blown fuse indicator	1492-FPK2	20
	10...36V blown fuse indicator	1492-FPK224	20
	35...75V blown fuse indicator	1492-FPK248	20
	60...150V blown fuse indicator	1492-FPK2120	20
	140...250V blown fuse indicator	1492-FPK2250	20

Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50


Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR5X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT5X8 (800/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP3-2-RE.

Wiring Diagram



IMPORTANT See [page 130](#) for ferrule selection.

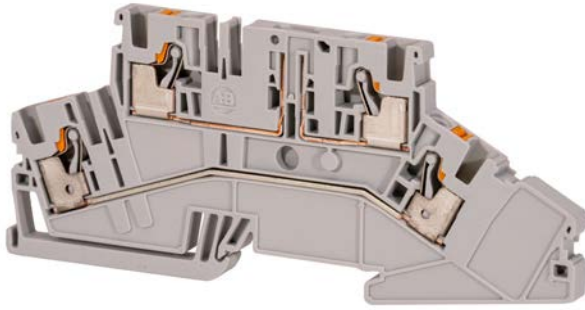1492-PDA4

To create full solution pair with connection element 1492-CEL.

Terminal Blocks—Dimensions (W x H x L): 6.1 x 56.5 x 126.5 mm

Color	Cat. No.	Pkg. Qty.
Gray	1492-PDA4	50

Specifications — Double-level Disconnect Terminal Block

Certifications	UL /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	...	...
Maximum Current	25 A	...	...
Wire Range (Rated Cross Section)	26 AWG...10 AWG	...	...
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Mounting Rails, End Barriers, End Anchors and Retainers

Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPDFB4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories	Cat. No.	Pkg. Qty.
-------------	----------	-----------

Center Jumpers⁽¹⁾

2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5

Connection Element

Connection Element	Grey	1492-CEL	20
--------------------	------	----------	----

Test Plugs

Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50

Marking Systems


ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP4-2-RE.

Wiring Diagram

IMPORTANT See [page 131](#) for ferrule selection.

1492-PDAG4

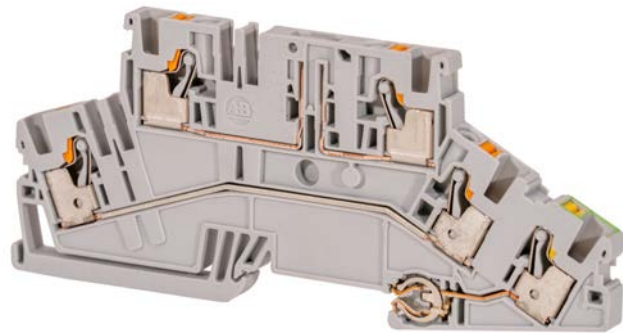

 To create full solution pair with connection element 1492-CEL.

Terminal Blocks—Dimensions (W x H x L): 6.1 x 56.5 x 126.5 mm		
Color	Cat. No.	Pkg. Qty.
 Gray	1492-PDAG4	50


Specifications — Double-level Disconnect Terminal Block			
Certifications	UL /CSA	IEC	ATEX
Voltage Rating	150V AC/DC	...	...
Maximum Current	25 A	...	...
Wire Range (Rated Cross Section)	26 AWG...10 AWG	...	...
Wire Strip Length	0.47 in. (12 mm)		
Density	49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-76...+266°F (-60...+130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Gray	1492-EBPDFB4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Connection Element			
Connection	Grey	1492-CEL	20
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP4-2-RE.

Wiring Diagram



IMPORTANT See [page 131](#) for ferrule selection.

Fuse Terminal Blocks

1492-PFB4



Terminal Blocks—Dimensions (W x H x L): 6.1 x 69 x 74 mm			
Color	Includes LED for Blown Fuse Indication	Cat. No.	Pkg. Qty.
	Black	No	1492-PFB4
		Yes	1492-PFB424
			1492-PFB448
			1492-PFB4120
			1492-PFB4250

Specifications —Fuse Terminal Block				
Certifications		 /CSA	IEC	ATEX
Voltage Rating	1492-PFB4	300V AC/DC	250V AC/DC	250V AC/DC
	1492-PFB424	10...36V AC/DC		
	1492-PFB448	30...70V AC/DC		
	1492-PFB4120	60...150V AC/DC		
	1492-PFB4250	100...250V AC/DC		
Maximum Current		10 A	6.3 A	6.3 A
Wire Range (Rated Cross Section)		26...10 AWG	4 mm ²	4 mm ²
Fuse Size (Not Supplied)		5 X 20 mm		
Wire Strip Length		0.47 in. (12 mm)		
Density		49 pcs/ft (163 pcs/m)		
Housing Temperature Range		-76...266°F (-60...130 °C)		
Fuse Size		5 x 20 mm		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2

Accessories		Cat. No.	Pkg. Qty.
End Barriers	Grey	1492-EBP4T	20
	Blue	1492-EBP4T-B	20
	Yellow	1492-EBP4T-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5


Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50

Marking Systems		
ClearMark Advanced and ClearPlot Basic Marker Cards	1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers	1492-MT6X8 (600/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP4-2-RE.

Wiring Diagram

No Blown Fuse Indication



With Blown Fuse Indication



IMPORTANT See [page 131](#) for ferrule selection.

1492-PDFB4



Terminal Blocks—Dimensions (W x H x L): 6.1 x 83.5 x 126.5 mm			
Color		Includes LED for Blown Fuse Indication	Pkg. Qty.
	Black	No	1492-PDFB4
		Yes	1492-PDFB424
			1492-PDFB448
			1492-PDFB4120
			1492-PDFB4250

Specifications —Fuse Terminal Block				
Certifications		 /CSA	IEC	ATEX
Voltage Rating	1492-PDFB4	150V AC/DC	250V AC/DC	250V AC/DC
	1492-PDFB424	10...36V AC/DC		
	1492-PDFB448	30...70V AC/DC		
	1492-PDFB4120	60...150V AC/DC		
	1492-PDFB4250	100...250V AC/DC		
Maximum Current		30 A	6.3 A	6.3 A
Wire Range (Rated Cross Section)		26...10 AWG	4 mm ²	4 mm ²
Fuse Size (Not Supplied)		5 X 20 mm		
Wire Strip Length		0.47 in. (12 mm)		
Density		49 pcs/ft (163 pcs/m)		
Housing Temperature Range		-76...266°F (-60...130 °C)		
Fuse Size		5 x 20 mm		


Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPDFB4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20

Accessories		Cat. No.	Pkg. Qty.
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP4-2-RE.

Wiring Diagram

No Blown Fuse Indication



With Blown Fuse Indication



IMPORTANT See [page 131](#) for ferrule selection.

1492-PDGFB4



Terminal Blocks—Dimensions (W x H x L): 6.1 x 83.5 x 126.5 mm			
Color	Includes LED for Blown Fuse Indication	Cat. No.	Pkg. Qty.
	Black	No	1492-PDGFB4
		Yes	1492-PDGFB424
			1492-PDGFB448
			1492-PDGFB4120
			1492-PDGFB4250

Specifications —Fuse Terminal Block				
Certifications		UL /CSA	IEC	ATEX
Voltage Rating	1492-PDGFB4	150V AC/DC	250V AC/DC	250V AC/DC
	1492-PDGFB424	10...36V AC/DC		
	1492-PDGFB448	30...70V AC/DC		
	1492-PDGFB4120	60...150V AC/DC		
	1492-PDGFB4250	100...250V AC/DC		
Maximum Current		30 A	6.3 A	6.3 A
Wire Range (Rated Cross Section)		26...10 AWG	4 mm ²	4 mm ²
Fuse Size (Not Supplied)		5 X 20 mm		
Wire Strip Length		0.47 in. (12 mm)		
Density		49 pcs/ft (163 pcs/m)		
Housing Temperature Range		-76...266°F (-60...130 °C)		
Fuse Size		5 x 20 mm		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBPDFB4	20
End Retainer		1492-ERL35	20
		1492-ERP35	20

Accessories		Cat. No.	Pkg. Qty.
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50

Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP4-2	60
3-pole		1492-CJP4-3	20
4-pole		1492-CJP4-4	
5-pole		1492-CJP4-5	
6-pole		1492-CJP4-6	
7-pole		1492-CJP4-7	
8-pole		1492-CJP4-8	
9-pole		1492-CJP4-9	
10-pole		1492-CJP4-10	
50-pole		1492-CJP4-50	5


Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P4TPE	50

Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR6X8 (120/card)	5 cards
ClearMultiprint Markers		1492-MT6X8 (600/roll)	1 roll


(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number will be 1492-CJP4-2-RE.

Wiring Diagram

No Blown Fuse Indication




With Blown Fuse Indication



IMPORTANT See [page 131](#) for ferrule selection.

1492-PAFB3

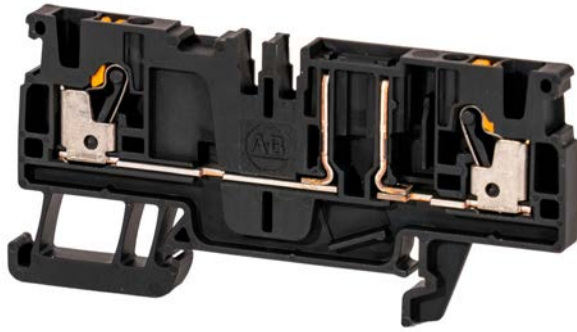

Terminal Blocks—Dimensions (W x H x L): 5.1 x 37.65 x 77.5 mm			
Color	Includes LED for Blown Fuse Indication	Cat. No.	Pkg. Qty.
■ Black	No	1492-PAFB3	50
	Yes	1492-PAFB312	
		1492-PAFB324	

Specifications — Automotive Fuse Terminal Block				
Certifications		UL /CSA	IEC	ATEX
Voltage Rating	1492-PAFB3	300V AC/DC	250V AC/DC	...
	1492-PAFB312	12V AC/DC		
	1492-PAFB324	24V AC/DC		
Maximum Current		16 A	10 A	...
Wire Range (Rated Cross Section)		28...12 AWG	2.5 mm ²	2.5 mm ²
Fuse Size (Not Supplied)		Automotive Blade Fuse		
Wire Strip Length		0.39 in. (10 mm)		
Density		59 pcs/ft (196 pcs/m)		
Housing Temperature Range		-76...266°F (-60...130 °C)		

Accessories		Cat. No.	Pkg. Qty.
Mounting Rails, End Barriers, End Anchors and Retainers			
Mounting Rail 1 m Symmetrical DIN	Steel	199-DR1	10
	Aluminum	1492-DR5	10
	Hi-Rise (Aluminum)	1492-DR6	2
	Angled (Steel)	1492-DR7	2
End Barriers	Grey	1492-EBP3Q	50
	Blue	1492-EBP3Q-B	50
	Yellow	1492-EBP3Q-Y	50
End Retainer		1492-ERL35	20
		1492-ERP35	20
End Anchor DIN Rail	Normal Duty	1492-EAJ35	50
	Heavy Duty	1492-EAHJ35	50
	Normal Duty	1492-EAP35	50


Accessories		Cat. No.	Pkg. Qty.
Center Jumpers ⁽¹⁾			
2-pole	Orange	1492-CJP3-2	60
3-pole		1492-CJP3-3	20
4-pole		1492-CJP3-4	
5-pole		1492-CJP3-5	
6-pole		1492-CJP3-6	
7-pole		1492-CJP3-7	
8-pole		1492-CJP3-8	
9-pole		1492-CJP3-9	
10-pole		1492-CJP3-10	
20-pole		1492-CJP3-20	
50-pole		1492-CJP3-50	
Test Plugs			
Test Plugs	Start Test Plug	1492-PTPS	50
	Test Plug	1492-P3TPE	50
Marking Systems			
ClearMark Advanced and ClearPlot Basic Marker Cards		1492-MR5X8 (120/card)	5 cards

(1) Available in orange as standard, to order other colors add the appropriate suffix to the catalog number listed: Blue =B, Red = RE. Example for a red 2-pole center jumper, the catalog number is 1492-CJP3-2-RE.


IMPORTANT See [page 130](#) for ferrule selection.

Wiring Diagram

With No Blown Fuse Indication



With Blown Fuse Indication



IMPORTANT See [page 130](#) for ferrule selection.

Ferrule Selection

Panduit Ferrules and Tools for use with 1492-P2 Terminal Blocks

Uninsulated Ferrule



Wire Size (AWG)	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
		1	2	3	4	5	6
24	F73-5-M	●			●		
24-22	F74-5-M	●			●		
22-20	F75-6-M	●	●	●	●	●	●
18	F76-6-M	●	●	●	●	●	●
16	F78-7-M	●	●	●	●	●	●
14	F80-7-M			●	●	●	●

Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Continuous Reeled Ferrules for use with CP-881 Automated Crimp Tool	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
				1	2	3	4	5	6
26	Grey	—	FSD72-6-D	●			●		
24	Yellow	—	FSD73-6-D	●			●		
24-22	Turquoise	—	FSD74-6-D	●			●		
22-20	White	FSD75-8-K	FSD75-6-D	●	●	●	●	●	●
18	Grey	FSD76-8-K	FSD76-6-D	●	●	●	●	●	●
16	Black	FSD78-8-K	FSD78-6-D			●	●	●	●
14	Blue	—	FSD80-12-D			●	●	●	●

Twin Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
			1	2	3	4	5	6
16	Black	FTD78-12-D	●		●	●		

(1) Hand Crimp Tool Reference

Reference Number	1	2	3	4	5	6
Hand Crimp Tool Part No.	CT-1002	CT-1003	CT-1090	CT-1123	CT-1160	CT-1170
Crimp Shape	Trapezoid	Trapezoid	Trapezoid	Square	Hexagon	Square
Shape Reference						

IMPORTANT For more information on Panduit ferrules and tools, visit panduit.com.

Panduit Ferrules and Tools for use with 1492-P3 Terminal Blocks

Uninsulated Ferrule



Wire Size (AWG)	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
		1	2	3	4	5	6
24	F73-5-M	●			●		
24-22	F74-5-M	●			●		
22-20	F75-6-M	●	●	●	●	●	●
18	F76-6-M	●	●	●	●	●	●
16	F78-7-M	●	●	●	●	●	●
14	F80-7-M			●	●	●	●
12	F81-9-M			●			●

Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Continuous Reeled Ferrules for use with CP-881 Automated Crimp Tool	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
				1	2	3	4	5	6
26	Grey	—	FSD72-6-D	●			●		
24	Yellow	—	FSD73-6-D	●			●		
24-22	Turquoise	—	FSD74-6-D	●			●		
22-20	White	FSD75-8-K	FSD75-6-D	●	●	●	●	●	●
18	Grey	FSD76-8-K	FSD76-6-D	●	●	●	●	●	●
16	Black	FSD78-8-K	FSD78-6-D			●	●	●	●
14	Blue	FSD80-8-DK	FSD80-12-D			●	●	●	●
12	Grey	—	FSD81-10-D			●	●	●	●

Twin Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
			1	2	3	4	5	6
22	White	FTD75-8-D	●	●	●	●	●	●
20	Grey	FTD76-8-D	●	●	●	●	●	●
18	Red	FTD77-8-D	●	●	●	●	●	●

(1) Hand Crimp Tool Reference

Reference Number	1	2	3	4	5	6
Hand Crimp Tool Part No.	CT-1002	CT-1003	CT-1090	CT-1123	CT-1160	CT-1170
Crimp Shape	Trapezoid	Trapezoid	Trapezoid	Square	Hexagon	Square
Shape Reference						

IMPORTANT For more information on Panduit ferrules and tools, visit panduit.com.

Panduit Ferrules and Tools for use with 1492-P4 Terminal Blocks

Uninsulated Ferrule



Wire Size (AWG)	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
		1	2	3	4	5	6
24	F73-5-M	●			●		
24-22	F74-5-M	●			●		
22-20	F75-6-M	●	●	●	●	●	●
18	F76-6-M	●	●	●	●	●	●
16	F78-7-M	●	●	●	●	●	●
14	F80-7-M			●	●	●	●
12	F81-9-M			●	●	●	●
10	F82-12-M			●	●	●	●

Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Continuous Reeled Ferrules for use with CP-881 Automated Crimp Tool	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
				1	2	3	4	5	6
26	Grey	—	FSD72-6-D	●			●		
24	Yellow	—	FSD73-6-D	●			●		
24-22	Turquoise	—	FSD74-6-D	●			●		
22-20	White	FSD75-8-K	FSD75-6-D	●	●	●	●	●	●
18	Grey	FSD76-8-K	FSD76-6-D	●	●	●	●	●	●
16	Black	FSD78-8-K	FSD78-6-D			●	●	●	●
14	Blue	FSD80-8-DK	FSD80-12-D			●	●	●	●
12	Grey	—	FSD81-10-D			●	●	●	●
10	Yellow	—	FSD82-12-C			●	●	●	●

Twin Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
			1	2	3	4	5	6
22	White	FTD75-8-D	●	●	●	●	●	●
20	Grey	FTD76-8-D	●	●	●	●	●	●
18	Red	FTD77-8-D	●	●	●	●	●	●

(1) Hand Crimp Tool Reference

Reference Number	1	2	3	4	5	6
Hand Crimp Tool Part No.	CT-1002	CT-1003	CT-1090	CT-1123	CT-1160	CT-1170
Crimp Shape	Trapezoid	Trapezoid	Trapezoid	Square	Hexagon	Square
Shape Reference						

IMPORTANT For more information on Panduit ferrules and tools, visit panduit.com.

Panduit Ferrules and Tools for use with 1492-P6 Terminal Blocks

Uninsulated Ferrule



Wire Size (AWG)	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
		1	2	3	4	5	6
22-20	F75-6-M	●	●	●	●	●	●
18	F76-6-M	●	●	●	●	●	●
16	F78-7-M	●	●	●	●	●	●
14	F80-7-M			●	●	●	●
12	F81-9-M			●	●	●	●
10	F82-12-M			●	●	●	●
8	F83-12-D			●	●	●	●

Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Continuous Reeled Ferrules for use with CP-881 Automated Crimp Tool	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
				1	2	3	4	5	6
22-20	White	FSD75-8-K	FSD75-6-D	●	●	●	●	●	●
18	Grey	FSD76-8-K	FSD76-6-D	●	●	●	●	●	●
16	Black	FSD78-8-K	FSD78-6-D			●	●	●	●
14	Blue	FSD80-8-DK	FSD80-12-D			●	●	●	●
12	Grey	—	FSD81-10-D			●	●	●	●
10	Yellow	—	FSD82-12-C			●	●	●	●

Twin Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
			1	2	3	4	5	6
22	White	FTD75-8-D	●	●	●	●	●	●
20	Grey	FTD76-8-D	●	●	●	●	●	●
18	Red	FTD77-8-D	●	●	●	●	●	●
16	Black	FTD78-8-D	●	●	●	●	●	●

(1) Hand Crimp Tool Reference

Reference Number	1	2	3	4	5	6
Hand Crimp Tool Part No.	CT-1002	CT-1003	CT-1090	CT-1123	CT-1160	CT-1170
Crimp Shape	Trapezoid	Trapezoid	Trapezoid	Square	Hexagon	Square
Shape Reference						

IMPORTANT For more information on Panduit ferrules and tools, visit [panduit.com](https://www.panduit.com).

Panduit Ferrules and Tools for use with 1492-P10 Terminal Blocks

Uninsulated Ferrule



Wire Size (AWG)	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾						
		1	2	3	4	5	6	7
22-20	F75-6-M	●	●	●	●	●	●	
18	F76-6-M	●	●	●	●	●	●	
16	F78-7-M	●	●	●	●	●	●	
14	F80-7-M			●	●	●	●	
12	F81-9-M			●	●	●	●	
10	F82-10-M			●	●	●	●	
8	F83-12-D			●	●			●
6	F84-12-TL							●

Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Continuous Reeled Ferrules for use with CP-881 Automated Crimp Tool	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾						
				1	2	3	4	5	6	7
22-20	White	FSD75-8-K	FSD75-6-D	●	●	●	●	●	●	
18	Grey	FSD76-8-K	FSD76-6-D	●	●	●	●	●	●	
16	Black	FSD78-8-K	FSD78-6-D			●	●	●	●	
14	Blue	—	FSD80-12-D			●	●	●	●	
12	Grey	—	FSD81-10-D			●	●	●	●	
10	Yellow	—	FSD82-12-C			●	●	●	●	
8	Red	—	FSD83-12-C			●	●			●
6	Blue	—	FSD84-12-C							●

Twin Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾					
			1	2	3	4	5	6
22	White	FTD75-8-D	●	●	●	●	●	●
20	Grey	FTD76-8-D	●	●	●	●	●	●
18	Red	FTD77-8-D	●	●	●	●	●	●
16	Black	FTD78-8-D	●	●	●	●	●	●
14	Blue	FTD80-10-TL	●	●	●	●	●	●
12	Grey	FTD81-12-C	●	●	●	●	●	●

(1) Hand Crimp Tool Reference

Reference Number	1	2	3	4	5	6	7
Hand Crimp Tool Part No.	CT-1002	CT-1003	CT-1090	CT-1123	CT-1160	CT-1170	CT-1004
Crimp Shape	Trapezoid	Trapezoid	Trapezoid	Square	Hexagon	Square	Trapezoid
Shape Reference							

IMPORTANT For more information on Panduit ferrules and tools, visit panduit.com.

Panduit Ferrules and Tools for use with 1492-P16 Terminal Blocks

Uninsulated Ferrule



Wire Size (AWG)	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾						
		3	4	5	6	7	8	9
18	F76-6-M	●	●	●	●			
16	F78-7-M	●	●	●	●			
14	F80-7-M	●	●	●	●			
12	F81-9-M	●	●	●	●			
10	F82-10-M	●	●	●	●			
8	F83-12-D		●	●				
6	F84-12-TL							●

Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Continuous Reeled Ferrules for use with CP-881 Automated Crimp Tool	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾						
				3	4	5	6	7	8	9
18	Grey	FSD76-8-K	FSD76-6-D	●	●	●	●	●		
16	Black	FSD78-8-K	FSD78-6-D	●	●	●	●	●		
14	Blue	FSD80-8-DK	FSD80-12-D	●	●	●	●	●		
12	Grey	—	FSD81-10-D	●	●	●	●			
10	Yellow	—	FSD82-12-C		●	●				
8	Red	—	FSD83-12-C							●
6	Blue	—	FSD84-12-C							●

Twin Insulated Ferrule



Wire Size (AWG)	Ferrule Insulation Color	Loose Piece Ferrules for use with Hand Crimp Tools	Hand Crimp Tools for Loose Piece Ferrules ⁽¹⁾								
			1	2	3	4	5	6	7	8	9
22	White	FTD75-8-D	●	●	●	●	●	●			
20	Grey	FTD76-8-D	●	●	●	●	●	●			
18	Red	FTD77-8-D	●	●	●	●	●	●			
16	Black	FTD78-8-D	●	●	●	●	●	●			
14	Blue	FTD80-10-TL	●	●	●	●	●	●			
12	Grey	FTD81-12-C	●	●	●	●	●	●			
10	Yellow	FTD82-14-D		●	●	●	●	●		●	●

(1) Hand Crimp Tool Reference

Reference Number	1	2	3	4	5	6	7	8	9	10
Hand Crimp Tool	CT-1002	CT-1003	CT-1090	CT-1123	CT-1160	CT-1170	CP-881	CT-1004	CT-1104	CT-1005
Crimp Shape	Trapezoid	Trapezoid	Trapezoid	Square	Hexagon	Square	Trapezoid	Trapezoid	Square	Trapezoid
Shape Reference										

IMPORTANT For more information on Panduit ferrules and tools, visit panduit.com.

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation.

Resource	Description
Push-in Terminal Blocks Product Profile, 1492-PP014	Provides features and benefits, offering, and basic specifications.
EtherNet/IP Network Devices User Manual, ENET-UM006	Describes how to configure and use EtherNet/IP devices to communicate on the EtherNet/IP network.
Ethernet Reference Manual, ENET-RM002	Describes basic Ethernet concepts, infrastructure components, and infrastructure features.
System Security Design Guidelines Reference Manual, SECURE-RM001	Provides guidance on how to conduct security assessments, implement Rockwell Automation products in a secure system, harden the control system, manage user access, and dispose of equipment.
Industrial Components Preventive Maintenance, Enclosures, and Contact Ratings Specifications, publication IC-TD002	Provides a quick reference tool for Allen-Bradley industrial automation controls and assemblies.
Safety Guidelines for the Application, Installation, and Maintenance of Solid-State Control, publication SGI-1.1	Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Certifications website, rok.auto/certifications .	Provides declarations of conformity, certificates, and other certification details.

You can view or download publications at [rok.auto/literature](#).

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, Knowledgebase, and product notification updates.	rok.auto/support
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Technical Documentation Center	Quickly access and download technical specifications, installation instructions, and user manuals.	rok.auto/techdocs
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Download firmware, associated files (such as AOP, EDS, and DTM), and access product release notes.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.

Allen-Bradley, ClearMark, ClearPlot, ClearMultiprint, expanding human possibility, and Rockwell Automation are trademarks of Rockwell Automation, Inc.
EtherNet/IP is a trademark of ODVA, Inc.
Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com ————— **expanding human possibility®**

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000
EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2663 0600
ASIA PACIFIC: Rockwell Automation SEA Pte Ltd, 2 Corporation Road, #04-05, Main Lobby, Corporation Place, Singapore 618494, Tel: (65) 6510 6608
UNITED KINGDOM: Rockwell Automation Ltd., Pitfield, Kiln Farm, Milton Keynes, MK11 3DR, United Kingdom, Tel: (44)(1908) 838-800