


Quick2Clamp Strut Mount Ratchet Clamp

Features and Benefits

- Impact modified, heat and UV stabilized PA66 provides long-term durability outdoors.
- Clamp and mount combination means no extra hardware is needed, for time-saving, toolless, one-handed installation.
- Three size ranges handle diameters from 0.5" to 2", reducing part inventory.
- Clamp saddle provides additional attachment option using a Solar Tie.



Material	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
Color	Black (BK)
Operating Temperature	-40°F to +221°F (-40°C to +105°C)
Certifications	E523406 [UL]

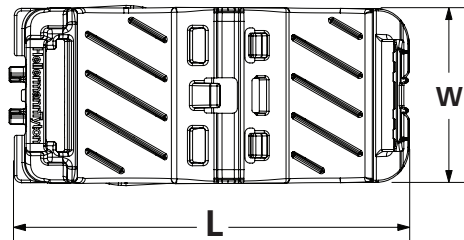

PART NO.	TYPE	Min. Bundle Diameter in. (mm)	Max. Bundle Diameter in. (mm)	Max. Recommended Load lbs (N)	Strut Profile	Length (L) in. (mm)	Width (W) in. (mm)	Pkg. Qty.
156-03000*	IRCBSTRUT	0.5 (12.7)	0.8 (19.5)	70.0 (311.0)	1-5/8" strut attachment	3.2 (79.9)	1.4 (34.8)	200
156-03001*		0.5 (12.7)	0.8 (19.5)	70.0 (311.0)	1-5/8" strut attachment	3.2 (79.9)	1.4 (34.8)	25
156-03002*	IRCCSTRUT	0.8 (19.4)	1.4 (36.0)	70.0 (311.0)	1-5/8" strut attachment	4.6 (115.9)	1.4 (34.8)	200
156-03003*		0.8 (19.4)	1.4 (36.0)	70.0 (311.0)	1-5/8" strut attachment	4.6 (115.9)	1.4 (34.8)	25
156-03004*	IRCDSTRUT	1.4 (36.0)	2.0 (51.0)	70.0 (311.0)	1-5/8" strut attachment	5.6 (140.9)	1.4 (34.8)	200
156-03005*		1.4 (36.0)	2.0 (51.0)	70.0 (311.0)	1-5/8" strut attachment	5.6 (140.9)	1.4 (34.8)	25

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes.

Contact HellermannTyton for more information.
Visit www.hellermann.tyton.com or call 800.537.1512

Disclaimer: The information in this datasheet is for informational purposes only. Information is subject to change at any time without notice.