
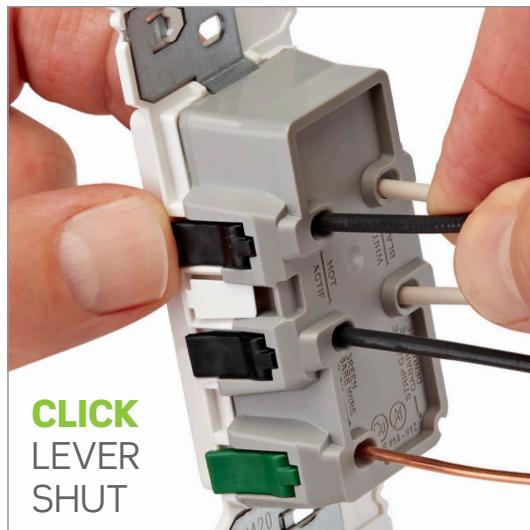


Lever Edge™

THE FUTURE OF WIRING
IS AS EASY AS...

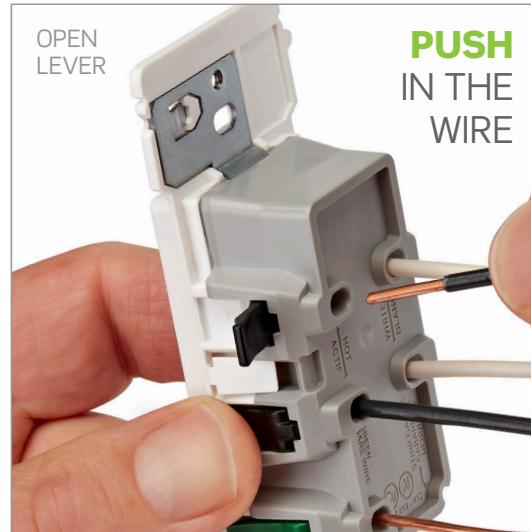

EXPERIENCE A NEW
UL APPROVED TERMINATION
METHOD FOR WIRING DEVICES

- EASY INSTALLATIONS
- TIME AND LABOR SAVINGS
- SAFE AND SECURE WIRING





**ACCEPTS MULTIPLE COPPER
WIRE SIZES AND TYPES**



INCREASED SAFETY

NO EXPOSED METAL PARTS

INDUSTRY-FIRST UL CERTIFIED RAPID SCREWLESS GROUNDING WIRE TERMINATION

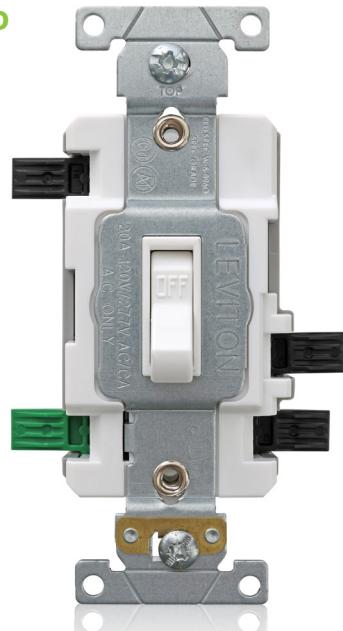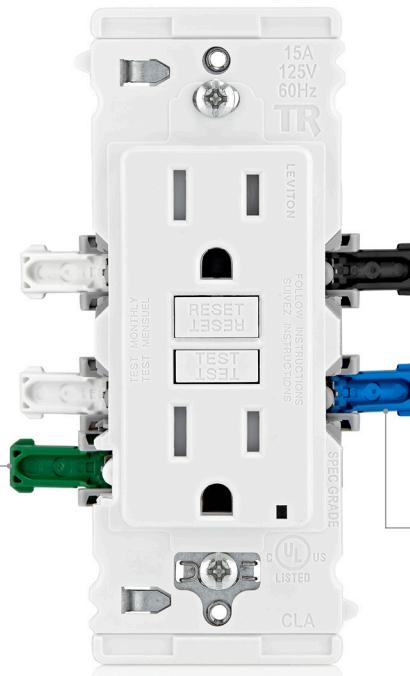

• UNIQUE BLUE LEVER

QUICKLY IDENTIFIES THE LOAD
HOT CONNECTION TO MINIMIZE
LINE/LOAD REVERSAL
RISK ON GFCIS

REDUCE RISK OF MISWIRING COLOR-CODED LEVER TERMINALS

ON THE JOB, TIME IS MONEY!

SAVE TIME AND LABOR WITH FAST AND EASY INSTALLS.

TONGUE AND GROOVE DESIGN

FOR EASIER ALIGNMENT IN
MULTI-GANG INSTALLATIONS*



LONGER AND WIDER STRAP

COMPATIBLE WITH MIDWAY WALLPLATES,
AND WITH STANDARD SIZED WALLPLATES
WHEN BREAKAWAY TAB IS REMOVED.*

*On residential switches and receptacles

NEED TO RE-WIRE?
SIMPLY RE-OPEN THE LEVER
AND TAKE OUT THE WIRE.
NO STRUGGLE.




**WIRING THAT GETS
BETTER WITH TIME!**
AFTER SUBJECT TO VIBRATION
WIRE RETENTION RESULTS
INCREASED BY ALMOST 40%**

**On commercial switches and receptacles using 10AWG

STRONG, SECURE WIRING CONNECTIONS

WE MEET UP TO **3.8X THE UL REQUIREMENTS**
FOR WIRE RETENTION PULL FORCE*


DURABLE
NYLON HOUSING
WITH HB OR BETTER
FLAMMABILITY
RATINGS

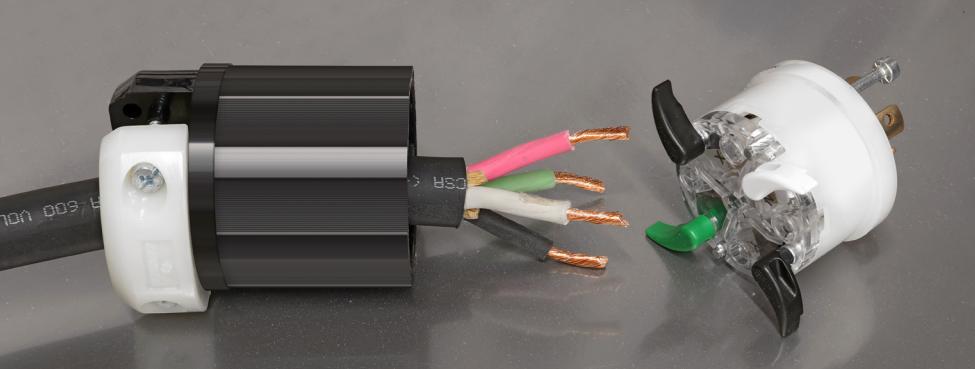

SECURE GRIP
WIDER RIBS ON HOUSING
STRENGTHENS GRIP WHILE
INSTALLING



EASY TO VIEW STATUS
CLEAR BACK COVER TO EASILY
VIEW CONNECTION STATUS

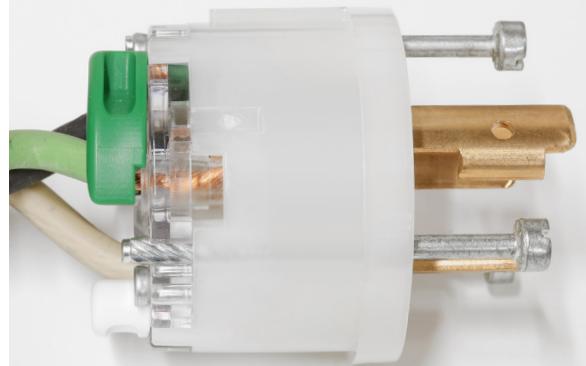

ORDERING INFORMATION

RESIDENTIAL GRADE DEVICES

RECEPTACLES

Cat. No.	Rating	Description
EGFT1-W	15 Amp / 20 Amp Feed-Through, 125 Volt	Tamper-Resistant GFCI, White
EGFW1-KW	15 Amp / 20 Amp Feed-Through, 125 Volt	Weather- and Tamper-Resistant GFCI, White
E5325-W	15 Amp / 20 Amp Feed-Through, 125 Volt	Tamper-Resistant Decora Receptacle, White
E5825-W	20 Amp 125 Volt	Tamper-Resistant Decora Receptacle, White

SWITCHES

Cat. No.	Rating	Description
E5601-W	15 Amp 120/277 Volt	Single Pole Rocker Switch
E5603-W	15 Amp 120/277 Volt	3-Way Rocker Switch

DIMMER

Cat. No.	Rating	Description
ESL01-1LW	120 Volt 60 Hz 150 W LED/CFL/INC	Decora Slide Dimmer

COMMERCIAL GRADE DEVICES

RECEPTACLES

Cat. No.	Rating	Description
E5362-SW	20 Amp 125 Volt	Duplex Receptacle
ET563-W	20 Amp 125 Volt	Tamper-Resistant Duplex Receptacle

SWITCHES

Cat. No.	Rating	Description
E1221-SW	20 Amp 120/277 Volt	Single Pole Toggle Switch

BLACK & WHITE

PLUGS

Cat. No.	NEMA Configuration
5266E	NEMA 5-15P
5366E	NEMA 5-20P
2311E	NEMA L5-20P
5466E	NEMA 6-20P
2321E	NEMA L6-20P
2621E	NEMA L6-30P
4770E	NEMA L7-15P
2411E	NEMA L14-20P
2711E	NEMA L14-30P

CONNECTORS

Cat. No.	NEMA Configuration
5269E	NEMA 5-15R
5369E	NEMA 5-20R



**THE FUTURE
OF WIRING
IS HERE.**



FOR PRODUCT DETAILS & ORDERING INFORMATION

Scan or Visit
leviton.com/leveredge

Leviton Manufacturing Co., Inc.

201 N Service Rd, Melville, NY 11747

Telephone: 1-800-323-8920 • FAX: 1-800-832-9538

Tech Line: 1-800-824-3005 (M-F 8AM-10PM; Sat 9AM-7PM; Sun 9AM-5PM)

© 2026 Leviton Manufacturing Co., Inc. All rights reserved.

NEC® is a registered trademark of the National Fire Protection Association, Quincy, MA 02169