

PERIMALITER®

PGM3/PGL3 LED WALL PACK

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

FEATURES

- Available in two sizes and four outputs up to 7,100 lumens
- A specially designed polycarbonate lens provides ultimate glare control which "softens" the light for no pixilation and unprecedented visual comfort
- Wireless control, motion sensor and photocontrol
- 10kA surge protection standard
- Dark bronze matte textured powder paint finish is standard, other finishes available
- PVL3 only available in dark bronze matte and white finishes



PGM3

PVL3



SPECIFICATIONS

CONSTRUCTION

- The die-cast aluminum housing provides firm mounting over recessed junction boxes
- 3 x 1/2" threaded conduit holes (top and sides) for surface conduit wiring or Photocontrol for dusk-to dawn control
- Two door options available: Cast aluminum frame with prismatic borosilicate glass (PGM3), One piece, prismatic, vandal resistant polycarbonate cover (PVL3)
- Standard finish is dark bronze textured powder paint. The PGM3 version is available in alternate finishes of black, white, grey, platinum silver and custom colors

OPTICS

- 180 high powered LEDs in, produce up to 7102 lumens in PGM3 and 6826 lumens in PVL3
- CCT – 3000K, 4000K, 5000K (70 CRI)

ELECTRICAL

- 120-277V universal voltage 50/60Hz, 0-10V dimmable
- Driver RoHS and IP66
- Drivers have greater than .90 power factor and less than 20% Total Harmonic Distortion
- 10kA surge protection (parallel); Automatically takes fixture off-line when device is consumed

CONTROLS

- Photocell and occupancy sensor options available for complete on/off or programmable dimming control

CERTIFICATIONS

- Listed to UL1598 for use in wet locations
- DLC® (DesignLights Consortium Qualified), with some Premium Qualified configurations. Not all product variations on this page are DLC Qualified. Refer to <http://www.designlights.org/> for the most up-to-date list.

WARRANTY

- 5 year warranty

KEY DATA	
Lumen Range	3516-7102
Wattage Range	27.6-54.4
Efficacy Range (LPW)	120-138
Life (Hours)	>60,000

PERIMALITER®

PGM3/PVL3 LED WALL PACK

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ORDERING GUIDE

Example: PGM3-180L-60-5K7-U-DBT

CATALOG #

Family	LED Engine	CCT/CRI	Voltage¹	Fixture Color	Options
PGM3 Glass Refractor	180L-30 180L, 30W	3K7 3000K, 70 CRI	U 120V-277V	BLT Black Matte Textured	F Fusing (voltage determined by voltage field) Single fusing only 120V, 277V, or 347V¹
PVL3 Polycarbonate Refractor⁴	180L-60 180L, 60W	4K7 4000K, 70 CRI	1 120V	BLS Black Gloss Smooth	PC Button photocontrol, (Must specify individual voltage)¹
		5K7 5000K, 70 CRI	2 208V	DBT Dark Bronze Matte Textured	BBU Battery Backup⁶
			3 240V	DBS Dark Brone Gloss Smooth	SCP Programmable motion control, factory default is 10% light output²³
			4 277V	GTT Graphite Matte Textured	Specify SCP Height
			5 480V	LGS Light Grey Gloss Smooth	8F Up to 8ft mount height
			F 347V	PSS Platinum Silver Smooth	20F Up to 20ft mount height
				WHT White Matte Textured	
				WHS White Gloss Smooth	
				VGT Verde Green Textured	
				Color Option	
				CC Custom Color	

ACCESSORIES AND SERVICES (ORDERED SEPARATELY)

Catalog Number	Description
☐ 93070598	Photocell, Button, 120-277V
☐ PVL3V	Full cut-off visor, formed aluminum, bronze finish
☐ SCP-REMOTE	Remote control for SCP option. Order at least one per project to program control⁵

Notes:

- 1 Voltage specific option, designate in voltage field, PC not available in 480V
- 2 0-10V fully adjustable dimming with automatic daylight calibration and different time delay settings, must order minimum of one remote to program dimming settings, 120V or 277V only
- 3 PC option not applicable, included in sensor
- 4 PVL3 only available in Bronze and White fixture colors
- 5 0-10V fully adjustable dimming with automatic daylight calibration and different time delay settings, must order minimum of one remote to program dimming settings not available in 208V, 240V, 347V or 480V
- 6 Not compatible with SCP controls

PERFORMANCE DATA

LEDs	Nominal Wattage	System Watts	DiSt. Type	5K (5000K nominal, 70 CRI)					4K (4000K nominal, 70 CRI)					3K (3000K nominal, 70 CRI)				
				LUMENS	LPW	B	U	G	LUMENS	LPW	B	U	G	LUMENS	LPW	B	U	G
PGM3-180L	30	28	4	3692	134	0	3	3	3815	138	0	3	3	3659	132	0	3	3
	60	55	4	6872	126	0	4	3	7102	131	0	4	3	6811	125	0	4	3
PVL3-180L	30	28	4	3549	129	0	3	2	3667	133	0	3	2	3516	127	0	3	2
	60	55	4	6606	123	1	4	3	6826	123	1	4	3	6545	120	1	4	3

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Actual performance may differ as a result of end-user environment and application

PERIMALITER®

PGM3/PVL3 LED WALL PACK

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ELECTRICAL DATA

# OF LEDS	Nominal Wattage (W)	INPUT VOLTAGE (V)	CURRENT (Amps)	SYSTEM POWER (w)
180	30	120	0.23	28
		208	0.13	28
		240	0.12	28
		277	0.10	28
		347	0.08	28
		480	0.06	28
	60	120	0.46	55
		208	0.26	55
		240	0.23	55
		277	0.20	55
		347	0.16	55
		480	0.11	55

PROJECTED LUMEN MAINTENANCE

Ambient Temp.	OPERATING HOURS				
	0	25,000	TM-21-111 60,000	100,000	L70 (hours)
25°C / 77°F	1.00	0.97	0.94	0.90	>325,000
40°C / 104°F	1.00	0.97	0.90	0.84	>190,000

1. Projected per IESNA TM-21-11 ambient, based on 10,000 hours of LED testing per IESNA LM-80-08


LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF)

AMBIENT TEMPERATURE		LUMEN MULTIPLIER
0°C	32°F	1.02
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98

Use these factors to determine relative lumen output for average ambient temperatures from 0–40°C (32–104°F)


DIMENSIONS

PGM3

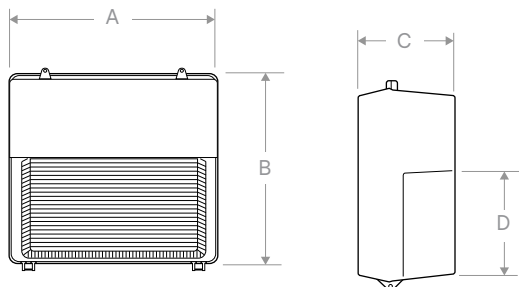

	A	B	C	D
PGM3	14.87"	15"	8"	6.81"
LED	378 mm	381 mm	203 mm	173 mm

PVL3

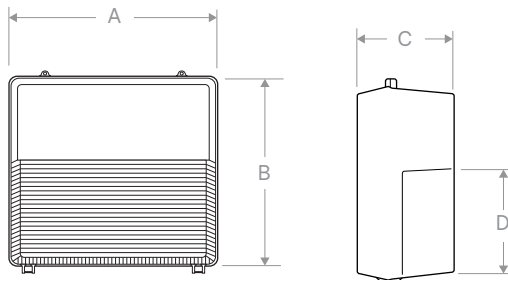

	A	B	C	D
PVL3	14.87"	15"	8"	6.81"
LED	378 mm	381 mm	203 mm	189 mm