

A collection of various Leviton electrical receptacles, including white, black, and red models, some with multiple outlets and others with single outlets, arranged on a white background. A semi-transparent dark grey box is overlaid on the center-left of the image, containing the title and subtitle text.

Commercial & Industrial Straight Blade Receptacles

Specification and
Hospital Grades

Straight Blade Receptacles Overview

CODE COMPLIANT SOLUTIONS

TAMPER-RESISTANT RECEPTACLES

Safety shutters prevent unintended contact with live parts as specified by the National Electrical Code®.



ISOLATED GROUND RECEPTACLES

Provides a more reliable, noise-free equipment ground path to sensitive electrical equipment.



POWER INDICATION RECEPTACLES

Provides visual indication of power present at the receptacle; ideal for emergency circuit applications.



WEATHER-RESISTANT RECEPTACLES

Designed for wet or damp locations, these receptacles provide added protection against corrosion, UV degradation, and cold impact damage.



SURGE PROTECTIVE RECEPTACLES

Provides point-of-use surge protection for sensitive electronic devices, such as monitors, projectors, computers, etc.



MARKED "CONTROLLED" RECEPTACLES

The National Electrical Code requires all 15 A and 20 A, 125 V receptacles that are automatically controlled to be marked with a specific symbol  and the word "CONTROLLED" on the receptacle.



HOSPITAL GRADE RECEPTACLES

In addition to UL Listing requirements for general use receptacles, hospital grade receptacles incorporate additional construction features and are subjected to more stringent performance requirements.




SMARTLOCKPRO® GFCI RECEPTACLES

By cutting off power if a ground-fault is detected, these receptacles are engineered to help protect people from the hazards of electric shock and electrocution.



SMARTLOCKPRO® AFCI RECEPTACLES

By detecting hazardous arc-faults and responding by interrupting power, these receptacles help reduce the likelihood of electrical fires.

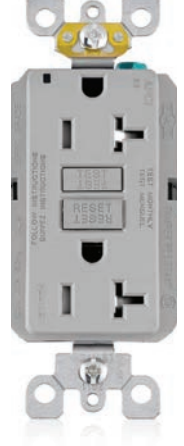


Leviton uses several Nationally Recognized Testing Labs (NRTLs) for certification of receptacles. UL and CSA are two of these NRTLs. When you see the UL and CSA symbols, you can have the confidence that the devices adhere to strict scientific safety, quality or security standards.



In addition to complying with UL general use requirements, when you see the FULS marking you are assured that the receptacle has been investigated for compliance with US Federal Specification W-C-596 for the purpose of more durability and service life.

Commercial & Industrial Straight Blade Receptacles

Specification and Hospital Grades

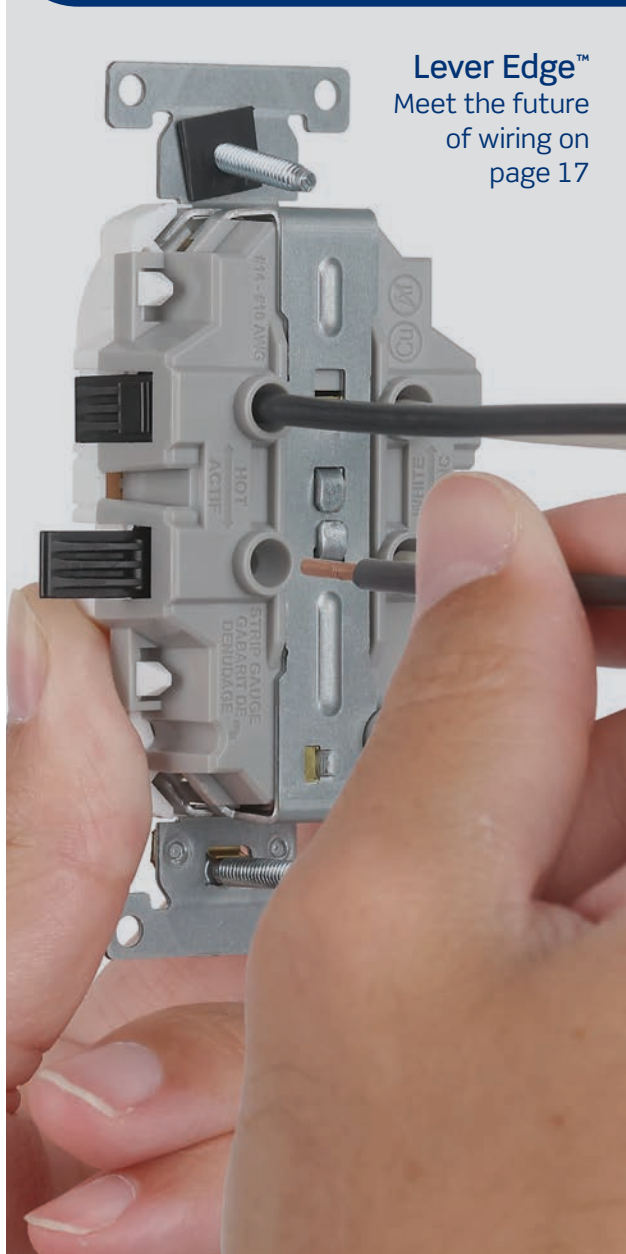

Lever Edge™
Meet the future
of wiring on
page 17

TABLE OF CONTENTS

Overview	2
Standard Receptacles	6
Time Savings	16
Lever Edge™ Fast Wiring Receptacles	17
Lev-lok® Modular Wiring Receptacles	18
Receptacles with Pre-Wired Leads	29
Protection	31
SmartlockPro® AFCI Receptacles	31
SmartlockPro® GFCI Receptacles	32
SmartlockPro® Dual Function AFCI/GFCI Receptacles	36
Surge Protective Receptacles	37
Plug Load Control	38
Marked "Controlled" Receptacles	38
Specialty	43
USB Receptacles	43
4-in-1™ Receptacles	45
Combination Straight & Locking Receptacles	46
Clock Hanger & Display Receptacles	46
Europlug/Universal Receptacles	46
Short Strap Receptacles	47
Accessories: Wallplates & Weatherproof Covers	48

Choose from among the broadest offering of safe and reliable receptacle outlets in the industry, with devices to suit your every need or function.

SYMBOLS TO SIMPLIFY BROWSING



Tamper-Resistant



Isolated Ground



Power Indication



Weather-Resistant



Corrosion-Resistant



Audible Alarm



Single Receptacle



Plug Load Control



Fast-Charging USB

A receptacle for every application

HOSPITAL GRADE

UL construction and performance requirements for Hospital Grade receptacles are more stringent than those for specification grade devices. Leviton Hospital Grade receptacles meet or exceed these requirements. These receptacles are Fed Spec W-C-596 rated.*



INDUSTRIAL SPECIFICATION GRADE

For demanding applications requiring robust construction and exceptional electrical performance, Leviton industrial specification grade receptacles are the ideal solution. These receptacles are Fed Spec W-C-596 rated.*



* See website for product specifications.

leviton.com/receptaclegrades

COMMERCIAL SPECIFICATION GRADE

The perfect balance between performance and value, these heavy-duty receptacles are the most widely specified for commercial building projects. Most Leviton non-tamper-resistant commercial receptacles are Fed Spec W-C-596 rated.*



HOSPITAL GRADE Extra Heavy-Duty

- Single-piece wraparound nickel-plated brass strap
- Integral ground contacts
- Extra heavy-duty high-performance brass electrical contacts



HOSPITAL GRADE & INDUSTRIAL SPECIFICATION GRADE Heavy-Duty

- Single-piece heavy-duty wraparound galvanized steel strap
- Brass ground contacts
- Heavy-duty copper alloy electrical contacts



COMMERCIAL SPECIFICATION GRADE

- Single-piece wraparound galvanized steel strap
- Brass ground contacts
- Heavy-duty copper alloy electrical contacts



* See website for product specifications.

* FULS applies to Non-Tamper-Resistant only.

Standard Receptacles



HOSPITAL GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

STANDARD

- Duplex Receptacle
- Smooth Face
- Back and Side Wire

White	8200-W	8300-W
Ivory	8200-I	8300-I
Lt Almond	8200-T	8300-T
Brown	8200	8300
Gray	8200-GY	8300-GY
Black	—	8300-E
Red	8200-R	8300-R
Blue	8200-BU	8300-BU

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Back and Side Wire



White	8200-SGW	8300-SGW
Ivory	8200-SGI	8300-SGI
Lt Almond	—	8300-SGT
Brown	8200-SG	8300-SG
Gray	8200-SGG	8300-SGG
Red	8200-SGR	8300-SGR

- Duplex Receptacle
- Smooth Face
- Power Indication LED
- Back and Side Wire



White	8200-PLW	8300-PLW
Ivory	8200-PLI	8300-PLI
Brown	—	8300-PL
Gray	—	8300-PLG
Red	8200-PLR	8300-PLR
Orange	—	8300-PLO

- Duplex Receptacle
- Smooth Face
- MRI
- Back and Side Wire

White	MRI82-W	MRI83-W
Ivory	MRI82-I	MRI83-I
Lt Almond	MRI82-T	MRI83-T
Gray	MRI82-GY	MRI83-GY
Red	MRI82-R	MRI83-R

DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Back and Side Wire

White	16262-HGW*	16362-HGW*
Ivory	16262-HGI*	16362-HGI*
Lt Almond	—	16362-HGT*
Gray	16262-HGG*	16362-HGG*
Red	16262-HGR*	16362-HGR*

- Duplex Receptacle
- Smooth Face
- Power Indication LED
- Back and Side Wire



White	16262-PLW*	16362-PLW*
Ivory	16262-PLI*	16362-PLI*
Red	16262-PLR*	16362-PLR*

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Back and Side Wire



White	16262-SGW*	16362-SGW*
Ivory	16262-SGI*	16362-SGI*
Lt Almond	16262-SGT*	16362-SGT*
Brown	16262-SG*	—
Gray	—	16362-SGG*
Red	16262-SGR*	16362-SGR*



8300-PLW



8200-SGG



16262-SGR

* Not Fed Spec rated

HOSPITAL GRADE Extra Heavy-Duty		NEMA 6-15R		NEMA 6-20R		250 V
2-Pole, 3-Wire • 250 Volt		15 Amp		20 Amp		
STANDARD	• Duplex Receptacle	White	—	8400-W		
	• Smooth Face	Ivory	8600-I	8400-I		
	• Back and Side Wire	Brown	8600	8400		
		Gray	—	8400-GY		
		Red	—	8400-R		
HOSPITAL GRADE Heavy-Duty		NEMA 5-15R		NEMA 5-20R		
2-Pole, 3-Wire • 125 Volt		15 Amp		20 Amp		
STANDARD	• Single Receptacle	White	8210-W	8310-W		
	• Smooth Face	Ivory	8210-I	8310-I		
	• Back and Side Wire	Brown	8210	8310		
		Gray	—	8310-GY		
		Red	8210-R	8310-R		
	• Duplex Receptacle	White	8200-HW	8300-HW		
	• Smooth Face	Ivory	8200-HI	8300-HI		
	• Back and Side Wire	Lt Almond	8200-HT	8300-HT		
		Brown	8200-H	8300-H		
		Gray	8200-HGY	8300-HGY		
		Red	8200-HR	8300-HR		
		Yellow	8200-HY	—		
		Blue	8200-HBU	8300-HBU		
	• Duplex Receptacle	White	C8200-W	C8300-W		
	• Indented Face	Ivory	C8200-I	C8300-I		
	• Back and Side Wire	Lt Almond	C8200-T	C8300-T		
		Brown	C8200	C8300		
		Gray	C8200-GY	C8300-GY		
		Black	C8200-E	C8300-E		
		Red	C8200-R	C8300-R		
		Blue	C8200-BU	C8300-BU		
	• Duplex Receptacle	White	T8200-W	T8300-W		
	• Smooth Face	Ivory	T8200-I	T8300-I		
	• Tamper-Resistant	Lt Almond	T8200-T	T8300-T		
	• Back and Side Wire	Brown	T8200	T8300		
		Gray	T8200-GY	T8300-GY		
		Black	T8200-E	T8300-E		
		Red	T8200-R	T8300-R		
		Blue	T8200-BU	T8300-BU		
	• Single Receptacle	Orange	8210-IG	8310-OIG		
	• Smooth Face					
	• Isolated Ground					
	• Back and Side Wire					
	• Duplex Receptacle	White	8200-IGW	8300-IGW		
	• Smooth Face	Ivory	8200-IGI	8300-IGI		
	• Isolated Ground	Brown	8200-IGB	8300-IGB		
	• Back and Side Wire	Gray	8200-IGG	8300-IGG		
		Red	8200-IGR	8300-IGR		
		Orange	8200-IG	8300-OIG		



Standard Receptacles

HOSPITAL GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

STANDARD

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire
- Pre-wired Ground Lead



- Duplex Receptacle
- Smooth Face
- Illuminated Blade Slot
- Back and Side Wire



- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Tamper-Resistant
- Back and Side Wire



Orange	8200-LIG	8300-LIG
White	8200-HLW	8300-HLW
Ivory	8200-HLI	8300-HLI
Gray	—	8300-HLG
Red	8200-HLR	8300-HLR
White	T8200-IGW	T8300-IGW
Ivory	T8200-IGI	T8300-IGI
Gray	T8200-IGG	T8300-IGG
Red	T8200-IGR	T8300-IGR
Orange	T8200-IG	T8300-IG
Blue	T8200-IGB	T8300-IGB
White	D8200-IGW	D8300-IGW
Ivory	D8200-IGI	D8300-IGI
Lt Almond	D8200-IGT	D8300-IGT
Brown	D8200-IGB	D8300-IGB
Gray	D8200-IGG	D8300-IGG
Black	D8200-IGE	D8300-IGE
Red	D8200-IGR	D8300-IGR
Orange	D8200-IG	D8300-IG
White	DT820-IGW	DT830-IGW
Ivory	DT820-IGI	DT830-IGI
Brown	DT820-IGB	DT830-IGB
Gray	DT820-IGG	DT830-IGG
Red	DT820-IGR	DT830-IGR
Orange	DT820-IG	DT830-IG

DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire



- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Tamper-Resistant
- Back and Side Wire



INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

STANDARD

- Duplex Receptacle
- Smooth Face
- Back and Side Wire

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Back and Side Wire



White	5262-W	5362-W
Ivory	5262-I	5362-I
Brown	5262	5362
Gray	5262-GY	5362-GY
Black	5262-E	5362-E
Red	5262-R	5362-R
Blue	—	5362-BU
White	5262-SGW	5362-SGW
Ivory	5262-SGI	5362-SGI
Lt Almond	5262-SGT	5362-SGT
Brown	5262-SG	5362-SG
Gray	5262-SGG	5362-SGG
Black	5262-SGE	5362-SGE
Red	5262-SGR	5362-SGR
Blue	5262-SGB	5362-SGB



T8300-IGW



D8300-IGR



5362-W

INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

STDRD

- Duplex Receptacle
- Corrosion-Resistant
- Smooth Face
- Back and Side Wire



Yellow

52CM-62

53CM-62

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

STANDARD

- Single Receptacle
- Smooth Face
- Side Wire Only



Ivory

5251-I

5351-I

Brown

5251

5351

- Single Receptacle
- Smooth Face
- Back and Side Wire



White

5261-W

5361-W

Ivory

5261-I

5361-I

Lt Almond

—

5361-T

Brown

5261

5361

Gray

5261-GY

5361-GY

Black

5261-E

5361-E

Red

5261-R

5361-R

- Duplex Receptacle
- Smooth Face
- Side Wire Only

White

5242-W

5342-W

Ivory

5242-I

5342-I

Brown

5242

5342

Gray

5242-GY

5342-GY

Black

—

5342-E

Red

5242-R

5342-R

- Duplex Receptacle
- Smooth Face
- Back and Side Wire

White

5252-W

5352-W

Ivory

5252-I

5352-I

Lt Almond

5252-T

5352-T

Brown

5252

5352

Gray

5252-GY

5352-GY

Black

5252-E

5352-E

Red

5252-R

5352-R

Blue

5252-BU

5352-BU

- Duplex Receptacle
- Smooth Face
- Back and Side Wire

White

5262-SW

5362-SW

Ivory

5262-SI

5362-SI

Lt Almond

5262-ST

5362-ST

Brown

5262-S

5362-S

Gray

5262-GYS

5362-GYS

Black

5262-SE

5362-SE

Red

5262-SR

5362-SR

Orange

—

5362-SO

Green

—

5362-GNS

Blue

5262-SBU

5362-SBU

- Duplex Receptacle
- Indented Face
- Back and Side Wire

White

C5262-W

C5362-W

Ivory

C5262-I

C5362-I

Lt Almond

C5262-T

C5362-T

Brown

C5262

C5362

Gray

C5262-GY

C5362-GY

Black

C5262-E

C5362-E

Red

C5262-R

C5362-R

Blue

C5262-BU

C5362-BU



5362-SGW



5352-GY



5361-W

Standard Receptacles

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- Indented Face
- Back and Side Wire
- Single Piece Ground Shunt

White	L5262-W	L5362-W
Ivory	L5262-I	L5362-I
Lt Almond	L5262-T	L5362-T
Brown	L5262	L5362
Gray	L5262-GY	L5362-GY
Black	L5262-E	L5362-E
Red	L5262-R	L5362-R
Blue	L5262-BU	L5362-BU

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Back and Side Wire



White	T5262-W	T5362-W
Ivory	T5262-I	T5362-I
Lt Almond	T5262-T	T5362-T
Brown	T5262	T5362
Gray	T5262-GY	T5362-GY
Black	T5262-E	T5362-E
Red	T5262-R	T5362-R
Blue	T5262-BU	T5362-BU

- Single Receptacle
- Smooth Face
- Corrosion-Resistant
- Back and Side Wire



Yellow	5261-CR	5361-CR
--------	---------	---------

- Single Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire



Orange	5261-IG	5361-IG
--------	---------	---------

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire



White	5262-IGW	5362-IGW
Ivory	5262-IGI	5362-IGI
Lt Almond	—	5362-IGT
Brown	5262-IGB	5362-IGB
Gray	5262-IGG	5362-IGG
Black	5262-IGE	5362-IGE
Red	5262-IGR	5362-IGR
Orange	5262-IG	5362-IG
Blue	—	5362-BIG

- Single Receptacle
- Smooth Face
- Weather-Resistant
- Back and Side Wire



White	W5261-W	W5361-W
Ivory	W5261-I	W5361-I
Lt Almond	W5261-T	W5361-T
Brown	W5261	W5361
Gray	W5261-GY	W5361-GY
Black	W5261-E	W5361-E
Red	W5261-R	W5361-R
Yellow	W5261-Y	W5361-Y

- Duplex Receptacle
- Indented Face
- Weather-Resistant
- Back and Side Wire



White	WBR15-W	WBR20-W
Ivory	—	WBR20-I
Gray	—	WBR20-GY
Black	—	WBR20-E
Red	—	WBR20-R
Yellow	WBR15-Y	WBR20-Y
Blue	—	WBR20-BU



L5362-I



5361-CR



W5361-W

STANDARD

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
STANDARD	- Duplex Receptacle - Smooth Face - Isolated Ground - Tamper-Resistant - Back and Side Wire  	White	T5262-IGW	T5362-IGW
		Ivory	T5262-IGI	T5362-IGI
		Gray	T5262-IGG	T5362-IGG
		Red	T5262-IGR	T5362-IGR
		Orange	T5262-IG	T5362-IG
		Blue	T5262-IGB	T5362-IGB
	- Duplex Receptacle - Smooth Face - Weather-Resistant - Tamper-Resistant - Back and Side Wire  	White	TWR15-W	TWR20-W
		Ivory	—	TWR20-I
		Gray	TWR15-GY	TWR20-GY
		Yellow	—	TWR20-Y
DECORA PLUS™	- Duplex Receptacle - Smooth Face - Back and Side Wire	White	16262-W*	16362-W*
		Ivory	16262-I*	16362-I*
		Brown	16262*	16362*
		Gray	16262-GY*	16362-GY*
		Black	16262-E*	16362-E*
	- Duplex Receptacle - Smooth Face - Side Wire Only	White	16242-W	16342-W
		Ivory	16242-I	16342-I
		Lt Almond	—	16342-T
		Brown	16242	16342
		Gray	—	16342-GY
		Black	16242-E	16342-E
	- Duplex Receptacle - Smooth Face - Back and Side Wire	White	16252-W	16352-W
		Ivory	16252-I	16352-I
		Lt Almond	16252-T	16352-T
		Brown	16252	16352
		Gray	16252-GY	16352-GY
		Black	16252-E	16352-E
		Red	16252-R	16352-R
		Blue	16252-BU	16352-BU
	- Single Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire  	White	—	16351-SGW
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire 	White	TDR15-W	TDR20-W
		Ivory	TDR15-I	TDR20-I
		Lt Almond	TDR15-T	TDR20-T
		Brown	TDR15	TDR20
		Gray	TDR15-GY	TDR20-GY
		Black	TDR15-E	TDR20-E
		Red	TDR15-R	—
		Blue	TDR15-BU	—

* Not Fed Spec rated



Standard Receptacles

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Back and Side Wire

White	16262-WIG	16362-WIG
Ivory	16262-IIG	16362-IIG
Lt Almond	16262-TIG	16362-TIG
Gray	16262-GIG	16362-GIG
Black	16262-EIG	16362-EIG
Red	16262-RIG	16362-RIG
Orange	16262-OIG	16362-OIG
Blue	16262-BIG	16362-BIG



- Duplex Receptacle
- Smooth Face
- Weather-Resistant
- Back and Side Wire



White	WDR15-W	WDR20-W
Ivory	WDR15-I	WDR20-I
Brown	WDR15	WDR20
Gray	WDR15-GY	WDR20-GY
Black	WDR15-E	WDR20-E

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Weather-Resistant
- Back and Side Wire



White	WTD15-W	WTD20-W
Gray	WTD15-GY	WTD20-GY
Black	WTD15-E	WTD20-E

- Duplex Receptacle
- Smooth Face
- Isolated Ground
- Tamper-Resistant
- Back and Side Wire



White	T1626-IGW	T1636-IGW
Ivory	T1626-IGI	T1636-IGI
Gray	T1626-IGG	T1636-IGG
Red	T1626-IGR	T1636-IGR
Orange	T1626-IG	T1636-IG
Blue	T1626-IGB	T1636-IGB



WDR20-W



T1636-IGG

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



COMBO

2-Pole, 3-Wire • 125 and 250 Volt

Color

15 Amp

STD.

- Duplex Receptacle
- Smooth Face
- Side Wire Only

Ivory	5292-I
Brown	5292

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



250 V

2-Pole, 3-Wire • 250 Volt

Color

15 Amp

20 Amp

STANDARD

- Single Receptacle
- Smooth Face
- Side Wire Only



White	5651-W	—
Ivory	5651-I	—
Brown	5651	—

- Single Receptacle
- Smooth Face
- Back and Side Wire



White	5661-W	5461-W
Ivory	5661-I	5461-I
Lt Almond	—	5461-T
Brown	5661	5461
Gray	—	5461-GY
Black	5661-E	—
Red	—	5461-R

- Duplex Receptacle
- Smooth Face
- Back and Side Wire

White	—	5462-W
Ivory	5662-I	5462-I
Brown	5662	5462
Gray	—	5462-GY



5292-I

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty		NEMA 6-15R	NEMA 6-20R	250 V
2-Pole, 3-Wire • 250 Volt		15 Amp	20 Amp	
STANDARD	- Single Receptacle - Smooth Face - Tamper-Resistant - Back and Side Wire 	White	T5661-W	T5461-W
		Ivory	T5661-I	T5461-I
		Lt Almond	T5661-T	T5461-T
		Brown	T5661	T5461
		Gray	T5661-GY	T5461-GY
		Black	T5661-E	T5461-E
		Orange	5661-IG	5461-IG
	- Single Receptacle - Smooth Face - Isolated Ground - Back and Side Wire - Pre-wired Ground Lead 			
	- Duplex Receptacle - Smooth Face - Isolated Ground - Back and Side Wire 	Orange	5662-IG	5462-IG
	- Single Receptacle - Smooth Face - Corrosion-Resistant - Back and Side Wire 	Yellow	5661-CR	5461-CR
STANDARD	- Single Receptacle - Smooth Face - Weather-Resistant - Back and Side Wire 	White	W5661-W	W5461-W
		Ivory	W5661-I	W5461-I
		Lt Almond	W5661-T	W5461-T
		Brown	W5661	W5461
		Gray	W5661-GY	W5461-GY
		Black	W5661-E	W5461-E
		Yellow	W5661-Y	W5461-Y
	- Single Receptacle - Smooth Face - Weather- and Tamper-Resistant - Back and Side Wire 	White	W5661-T0W	W5461-T0W
		Ivory	W5661-T0I	W5461-T0I
		Lt Almond	W5661-T0T	W5461-T0T
STANDARD		Brown	W5661-T00	W5461-T00
		Gray	W5661-TGY	W5461-TGY
		Black	W5661-T0E	W5461-T0E
		Yellow	W5661-T0Y	W5461-T0Y
COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R	NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp	
STANDARD	- Single Receptacle - Indented Face - Side Wire Only 	White	5015-W	5801-W
		Ivory	5015-I	5801-I
		Lt Almond	5015-T	5801-T
		Brown	5015	5801
	- Single Receptacle - Indented Face - Back and Side Wire 	White	—	5891-W
STANDARD		Ivory	5088-I	—
		Lt Almond	5088-T	—
		Brown	5088	5891



Standard Receptacles



COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- Smooth Face
- Side Wire Only

White	CR015-W	CR020-W
Ivory	CR015-I	CR020-I
Lt Almond	CR015-T	CR020-T
Brown	CR015	CR020
Gray	CR015-GY	CR020-GY
Black	CR015-E	CR020-E
Red	CR015-R	CR020-R
Orange	CR015-O	CR020-O
Green	CR015-N	CR020-N
Blue	CR015-B	CR020-B

- Duplex Receptacle
- Indented Face
- Side Wire Only

White	CR15-W	CR20-W
Ivory	CR15-I	CR20-I
Lt Almond	CR15-T	CR20-T
Brown	CR15	CR20
Gray	CR15-GY	CR20-GY
Black	CR15-E	CR20-E

- Duplex Receptacle
- Indented Face
- Back and Side Wire

White	BR15-W	BR20-W
Ivory	BR15-I	BR20-I
Lt Almond	BR15-T	BR20-T
Brown	BR15	BR20
Gray	BR15-GY	BR20-GY
Black	BR15-E	BR20-E
Red	BR15-R	BR20-R
Orange	BR15-O	BR20-O
Green	BR15-N	BR20-N
Blue	BR15-B	BR20-B

- Single Receptacle
- Smooth Face
- Tamper-Resistant
- Back and Side Wire
- Grounding



White	T5015-W	T5020-W
Ivory	T5015-I	T5020-I
Lt Almond	T5015-T	T5020-T
Brown	T5015	T5020
Gray	T5015-GY	T5020-GY
Black	T5015-E	T5020-E

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Back and Side Wire



White	TBR15-W	TBR20-W
Ivory	TBR15-I	TBR20-I
Lt Almond	TBR15-T	TBR20-T
Brown	TBR15	TBR20
Gray	TBR15-GY	TBR20-GY
Black	TBR15-E	TBR20-E

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Side Wire Only



White	TCR15-W	TCR20-W
Ivory	TCR15-I	TCR20-I
Lt Almond	TCR15-T	TCR20-T
Brown	TCR15	TCR20
Gray	TCR15-GY	TCR20-GY
Black	TCR15-E	TCR20-E

- Single Receptacle
- Smooth Face
- Back and Side Wire



White	16251-W	16351-W
Ivory	16251-I	16351-I
Brown	16251	16351



CR020-GY



BR20-W



16351-I

STANDARD

DECORA PLUS™

COMMERCIAL SPECIFICATION GRADE

NEMA
5-15R



NEMA
5-20R



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Side Wire Only

White

DTC15-W

DTC20-W

Ivory

DTC15-I

DTC20-I

Lt Almond

DTC15-T

DTC20-T

Brown

DTC15

DTC20

Gray

DTC15-GY

DTC20-GY

Black

DTC15-E

DTC20-E

Red

DTC15-R

DTC20-R

Orange

DTC15-O

DTC20-O

Green

DTC15-N

DTC20-N

Blue

DTC15-B

DTC20-B



DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Side Wire Only

White

DCR15-W

DCR20-W

Ivory

DCR15-I

DCR20-I

Lt Almond

DCR15-T

DCR20-T

Brown

DCR15

DCR20

Gray

DCR15-GY

DCR20-GY

Black

DCR15-E

DCR20-E

Red

DCR15-R

DCR20-R

Orange

DCR15-O

DCR20-O

Green

DCR15-G

DCR20-G

Blue

DCR15-R

DCR20-R

- Single Receptacle
- Smooth Face
- Side Wire Only

White

16241-W

16341-W

Ivory

16241-I

16341-I

Lt Almond

—

16341-T

Brown

—

16341

Gray

—

16341-GY

Black

—

16341-E



- Single Receptacle
- Smooth Face
- Tamper-Resistant
- Back and Side Wire

White

—

16351-SGW



COMMERCIAL SPECIFICATION GRADE

NEMA
10-20R



2-Pole, 3-Wire • 125/250 Volt

Color

20 Amp

125/250 V

STD.

- Single Receptacle
- Smooth Face
- Side Wire Only



Ivory

5032-I

Black

5032

COMMERCIAL SPECIFICATION GRADE

NEMA
5-15R



NEMA
6-15R



2-Pole, 3-Wire • 125 and 250 Volt

Color

15 Amp

COMBO

STD.

- Duplex Receptacle
- Indented Face
- Side Wire Only

White

5031-W

Ivory

5031-I

Brown

5031

DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Back and Side Wire

White

16292-W

Ivory

16292-I



16292-W



5032



5842-I

Standard Receptacles

COMMERCIAL SPECIFICATION GRADE				NEMA 5-20R		NEMA 6-20R		COMBO
2-Pole, 3-Wire • 125 and 250 Volt			Color	20 Amp				
STANDARD	- Duplex Receptacle - Indented Face - Side Wire Only		Ivory	5842-I				
			Brown	5842				
			Ivory	5844-I				
			Brown	5844				
2-Pole, 3-Wire • 125 and 250 Volt			Ivory	5844				
2-Pole, 3-Wire • 125 and 250 Volt			Brown	5844				
2-Pole, 3-Wire • 125 and 250 Volt			Back and Side Wire	5844				
COMMERCIAL SPECIFICATION GRADE				NEMA 14-20R		125/250 V		
3-Pole, 4-Wire • 125/250 Volt			Color	20 Amp				
STD.	- Single Receptacle - Smooth Face - Back and Side Wire		Black	8410				
COMMERCIAL SPECIFICATION GRADE				NEMA 6-15R		NEMA 6-20R		250 V
2-Pole, 3-Wire • 250 Volt			Color	15 Amp	20 Amp			
STANDARD	- Duplex Receptacle - Indented Face - Side Wire Only		White	—	5822-W			
			Ivory	5028-I	5822-I			
			Brown	5028	5822			
			White	5029-W	5821-W			
			Ivory	5029-I	5821-I			
			Lt Almond	—	5821-T			
			Brown	5029	5821			
			White	5089-I	5823-I			
			Brown	—	5823			
			Back and Side Wire					
DECORA PLUS™	- Single Receptacle - Smooth Face - Back and Side Wire		White	16651-W	16451-W			
			Ivory	16651-I	16451-I			
			White	—	16462-W			
			Ivory	16662-I	16462-I			
			Black	—	16462-E			
			White	16641-W	16441-W			
			Ivory	16641-I	16441-I			
			Lt Almond	—	16441-T			
			Back and Side Wire					
			Back and Side Wire					
COMMERCIAL SPECIFICATION GRADE				NEMA 7-15R		277 V		
2-Pole, 3-Wire • 277 Volt			Color	15 Amp				
STD.	- Duplex Receptacle - Smooth Face - Back and Side Wire		Brown	5585				



Lever Edge™ Fast Wiring Receptacles

Meet Lever Edge™ wiring devices, designed for simple installations, time savings, superior performance, and long-lasting reliability. Simply open the lever, push the wire into the color-coded terminals, click down, and you're done.


KEY FEATURES & BENEFITS

- Secure: lever mechanism provides a strong, secure wire connection
- User-friendly design: color-coded lever terminals help prevent miswiring
- Convenient: devices can be unwired/removed and rewired if needed

EXPLORE THE
FULL PORTFOLIO
LEVITON.COM/LEVEREDGE




OPEN THE LEVER...



PUSH.



CLICK.



DONE!

Fast, safe, and
easy to install!

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Tamper-Resistant	White	ET562-W	ET563-W
		Ivory	ET562-I	ET563-I
		Gray	ET562-GY	ET563-GY
		Black	ET562-E	ET563-E
		Red	ET562-R	ET563-R
	• Duplex Receptacle • Indented Face	White	E5262-SW	E5362-SW
		Ivory	E5262-SI	E5362-SI
		Gray	E5262-SG	E5362-SG
		Black	E5262-SE	E5362-SE
		Red	E5262-SR	E5362-SR



RESIDENTIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
DECORA®	• Duplex Receptacle • GFCI Protection • Power Indication LED • Weather & Tamper-Resistant • 20 Amp Feed-Through Terminals	White	EGFW1-KW	—
		White	EGFT1-W	—
		White	E5325-W	—
	• Duplex Receptacle • GFCI Protection • Power Indication LED • Tamper-Resistant • 20 Amp Feed-Through Terminals	White	—	E5825-W
		White	—	E5825-W
	• Duplex Receptacle • Tamper-Resistant • 20 Amp Feed-Through Terminals	White	—	E5825-W
		White	—	E5825-W
	• Duplex Receptacle • Tamper-Resistant • 20 Amp Feed-Through Terminals	White	—	E5825-W
		White	—	E5825-W
	• Duplex Receptacle • Tamper-Resistant • 20 Amp Feed-Through Terminals	White	—	E5825-W
		White	—	E5825-W



Lev-lok® Modular Wiring Devices: Receptacles

The perfect productivity solution forelectrical construction & maintenance applications.

KEY FEATURES & BENEFITS


- A simple twist and lock wiring module
- Stranded or solid leads
- Available with and without 4-port push-in wire connectors
- A full portfolio of solutions



EXPLORE THE
FULL PORTFOLIO
LEVITON.COM/LEVLOK



How it works...

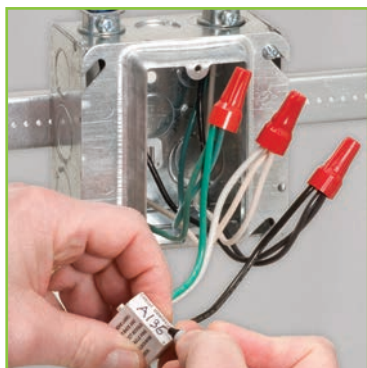

INSTALL WIRING MODULE

All modules have a Circuit ID Label for ease of identification



CONNECT WIRING DEVICE

Simply push and twist to lock connection



FINISH INSTALLATION

Install device into box and finish with wallplate

Future Proof

It's 5x faster to replace devices in a facility to meet future needs, whether you're updating technology or meeting new requirements.

Compress Timelines

Accelerate installation and swap outs to complete projects faster than using traditional wiring.

Accurate & Secure Connection

Lev-Lok® lowers the risk of incorrect installation while providing a safe and secure connection.



CALCULATE YOUR SAVINGS ONLINE:

www.leviton.com/levlokcalculator



MSTWL series wiring modules (sold separately) must be used with Lev-Lok receptacles. See page 28 for options and ordering information.



Lev-lok® Modular Wiring Devices: Receptacles

HOSPITAL GRADE Extra Heavy-Duty		NEMA 5-15R	NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
STANDARD	- Duplex Receptacle - Smooth Face - Two Outlets Marked "Controlled" 	White	M8200-H2W	M8300-H2W
		Red	M8200-H2R	M8200-H2R
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Two Outlets Marked "Controlled"  	White	MT820-2SW	MT830-2SW
		Red	MT820-2SW	MT830-2SW
	- Duplex Receptacle - Smooth Face	White	M8200-W	M8300-W
		Ivory	M8200-I	M8300-I
		Lt Almond	M8200-T	M8300-T
		Brown	M8200	M8300
		Gray	M8200-GY	M8300-GY
		Black	M8200-E	M8300-E
		Red	M8200-R	M8300-R
		Blue	M8200-B	M8300-B
	- Duplex Receptacle - Smooth Face - Tamper-Resistant 	White	M8200-SGW	M8300-SGW
		Ivory	M8200-SGI	M8300-SGI
		Lt Almond	M8200-SGT	M8300-SGT
		Brown	M8200-SG	M8300-SG
		Gray	M8200-SGG	M8300-SGG
		Black	M8200-SGE	M8300-SGE
		Red	M8200-SGR	M8300-SGR
		Blue	M8200-SGB	M8300-SGB
	- Duplex Receptacle - Smooth Face - MRI	White	MR15-W	MR120-W
		Ivory	MR15-I	MR120-I
		Lt Almond	MR15-T	MR120-T
		Gray	MR15-GY	MR120-GY
		Red	MR15-R	MR120-R
	- Duplex Receptacle - Smooth Face - Power Indication LED 	White	M8200-PLW	M8300-PLW
		Ivory	M8200-PLI	M8300-PLI
		Lt Almond	M8200-PLT	M8300-PLT
		Gray	M8200-PLG	M8300-PLG
		Red	M8200-PLR	M8300-PLR
	- Duplex Receptacle - Smooth Face - Illuminated Blade Slot 	White	M8200-ILW	M8300-ILW
		Ivory	M8200-ILI	M8300-ILI
		Lt Almond	M8200-ILT	M8300-ILT
		Gray	M8200-ILG	M8300-ILG
		Red	M8200-ILR	M8300-ILR
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Illuminated Blade Slot  	White	MT820-ILW	MT830-ILW
		Ivory	MT820-ILI	MT830-ILI
		Lt Almond	MT820-ILT	MT830-ILT
		Gray	MT820-ILG	MT830-ILG
		Red	MT820-ILR	MT830-ILR



Lev-lok® Modular Wiring Devices: Receptacles

HOSPITAL GRADE Extra Heavy-Duty		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp
DECORA PLUS™	• Duplex Receptacle • Smooth Face	White M1626-HGW	M1636-HGW
		Ivory M1626-HGI	M1636-HGI
		Lt Almond M1626-HGT	M1636-HGT
		Gray M1626-HGG	M1636-HGG
		Black M1626-HGE	M1636-HGE
		Red M1626-HGR	M1636-HGR
		Blue M1626-HGB	M1636-HGB
	• Duplex Receptacle • Smooth Face • Tamper-Resistant	White MT162-HGW	MT163-HGW
		Ivory MT162-HGI	MT163-HGI
		Lt Almond —	MT163-HGT
		Gray MT162-HGG	MT163-HGG
		Red MT162-HGR	MT163-HGR
	• Duplex Receptacle • Smooth Face • Power Indication LED	White M1626-PLW	M1636-PLW
		Ivory M1626-PLI	M1636-PLI
		Lt Almond M1626-PLT	M1636-PLT
		Gray M1626-PLG	M1636-PLG
		Red M1626-PLR	M1636-PLR
	• Duplex Receptacle • Smooth Face • Illuminated Blade Slot	White M1626-ILW	M1636-ILW
		Ivory M1626-ILI	M1636-ILI
		Lt Almond M1626-ILT	M1636-ILT
		Gray M1626-ILG	M1636-ILG
		Red M1626-ILR	M1636-ILR
	• Duplex Receptacle • Smooth Face • Tamper-Resistant • Illuminated Blade Slot	White MT162-ILW	MT163-ILW
		Ivory MT162-ILI	MT163-ILI
		Lt Almond MT162-ILT	MT163-ILT
		Gray MT162-ILG	MT163-ILG
		Red MT162-ILR	MT163-ILR
HOSPITAL GRADE Heavy-Duty		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp
STANDARD	• Duplex Receptacle • Smooth Face	White M8200-HW	M8300-HW
		Ivory M8200-HI	M8300-HI
		Lt Almond M8200-HT	M8300-HT
		Brown M8200-H	M8300-H
		Gray M8200-HGY	M8300-HGY
		Black M8200-HE	M8300-HE
		Red M8200-HR	M8300-HR
		Blue M8200-HB	M8300-HB
	• Duplex Receptacle • Smooth Face • Tamper-Resistant	White MT820-W	MT830-W
		Ivory MT820-I	MT830-I
		Lt Almond MT820-T	MT830-T
		Brown MT820	MT830
		Gray MT820-GY	MT830-GY
		Black MT820-E	MT830-E
		Red MT820-R	MT830-R
		Blue MT820-B	MT830-B



Receptacles must be used with MSTWL series wiring modules (sold separately). See pg 28 for module details.



Lev-lok® Modular Wiring Devices: Receptacles

HOSPITAL GRADE Heavy-Duty		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
STANDARD	- Duplex Receptacle - Smooth Face - Isolated Ground	White	M8200-IGW	M8300-IGW	
		Ivory	M8200-IGI	M8300-IGI	
		Lt Almond	M8200-IGT	M8300-IGT	
		Gray	M8200-IGG	M8300-IGG	
		Black	M8200-IGE	M8300-IGE	
		Red	M8200-IGR	M8300-IGR	
		Orange	M8200-IG	M8300-IG	
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Isolated Ground	White	MT820-IGW	MT830-IGW	 
		Ivory	MT820-IGI	MT830-IGI	
		Lt Almond	MT820-IGT	MT830-IGT	
		Gray	MT820-IGG	MT830-IGG	
		Black	MT820-IGE	MT830-IGE	
		Red	MT820-IGR	MT830-IGR	
		Orange	MT820-IG	MT830-IG	
DECORA PLUS™	- Duplex Receptacle - Smooth Face - Isolated Ground	White	MD820-IGW	MD830-IGW	
		Ivory	MD820-IGI	MD830-IGI	
		Lt Almond	MD820-IGT	MD830-IGT	
		Gray	MD820-IGG	MD830-IGG	
		Black	MD820-IGE	MD830-IGE	
		Red	MD820-IGR	MD830-IGR	
		Orange	MD820-IG	MD830-IG	
	- Duplex Receptacle - Smooth Face - Isolated Ground - Tamper-Resistant	White	MDT82-IGW	MDT83-IGW	 
		Ivory	MDT82-IGI	MDT83-IGI	
		Lt Almond	MDT82-IGT	MDT83-IGT	
		Gray	MDT82-IGG	MDT83-IGG	
		Black	MDT82-IGE	MDT83-IGE	
		Red	MDT82-IGR	MDT83-IGR	
		Orange	MDT82-IG	MDT83-IG	

INDUSTRIAL SPECIFICATION GRADE				
Extra Heavy-Duty				
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
STANDARD	• Duplex Receptacle	White	M5262-W	M5362-W
	• Smooth Face	Ivory	M5262-I	M5362-I
		Lt Almond	M5262-T	M5362-T
		Brown	M5262	M5362
		Gray	M5262-GY	M5362-GY
		Black	M5262-E	M5362-E
		Red	M5262-R	M5362-R
		Blue	M5262-B	M5362-B



M8300-HW



M8300-IGR



MD820-IGI

Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE Extra Heavy-Duty		NEMA 5-15R 	NEMA 5-20R 
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp
STANDARD	- Duplex Receptacle - Smooth Face - Tamper-Resistant	White M5262-SGW	M5362-SGW
		Ivory M5262-SGI	M5362-SGI
		Lt Almond M5262-SGT	M5362-SGT
		Brown M5262-SG	M5362-SG
		Gray M5262-SGG	M5362-SGG
		Black M5262-SGE	M5362-SGE
		Red M5262-SGR	M5362-SGR
		Blue M5262-SGB	M5362-SGB
			
INDUSTRIAL SPECIFICATION GRADE Heavy-Duty		NEMA 5-15R 	NEMA 5-20R 
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp
STANDARD	- Duplex Receptacle - Smooth Face	White M5262-SW	M5362-SW
		Ivory M5262-SI	M5362-SI
		Lt Almond M5262-ST	M5362-ST
		Brown M5262-S	M5362-S
		Gray M5262-GYS	M5362-GYS
		Black —	M5362-SE
		Red M5262-SR	M5362-SR
		Blue M5262-SB	M5362-SB
			
STANDARD	- Duplex Receptacle - Smooth Face - Tamper-Resistant	White MT562-SW	MT563-SW
		Ivory MT562-SI	MT563-SI
		Lt Almond MT562-ST	MT563-ST
		Brown MT562-S	MT563-S
		Gray MT562-SGY	MT563-SY
		Black MT562-SE	MT563-SE
		Red MT562-SR	MT563-SR
		Blue MT562-SB	MT563-SB
			
STANDARD	- Duplex Receptacle - Smooth Face - Two Outlets Marked "Controlled"	White M5262-2SW	M5362-2SW
		Ivory M5262-2SI	M5362-2SI
		Lt Almond M5262-2ST	M5362-2ST
		Brown M5262-2S	M5362-2S
		Gray M5262-2SG	M5362-2SG
		Black M5262-2SE	M5362-2SE
		Red M5262-2SR	M5362-2SR
		Green M5262-2SN	M5362-2SN
		Blue M5262-2SU	M5362-2SU
			
STANDARD	- Duplex Receptacle - Smooth Face - Split-Circuit - Separate lead provided	White M5262-SCW	M5362-SCW
		Ivory M5262-SCI	M5362-SCI
		Lt Almond M5262-SCT	M5362-SCT
		Brown M5262-SC	M5362-SC
		Gray M5262-SCG	M5362-SCG
		Black M5262-SCE	M5362-SCE
		Red M5262-SCR	M5362-SCR
		Blue M5262-SCB	M5362-SCB



M5362-SGW



MT563-SW

Receptacles must be used with MSTWL series wiring modules (sold separately). See pg 28 for module details.



MSTWL-A

Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

STANDARD	- Duplex Receptacle - Smooth Face - Isolated Ground	White	M5262-IGW	M5362-IGW
		Ivory	M5262-IGI	M5362-IGI
		Lt Almond	M5262-IGT	M5362-IGT
		Gray	M5262-IGG	M5362-IGG
		Black	M5262-IGE	M5362-IGE
		Red	M5262-IGR	M5362-IGR
		Orange	M5262-IG	M5362-IG
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Two Outlets Marked "Controlled"	White	MT562-2SW	MT563-2SW
		Ivory	MT562-2SI	MT563-2SI
		Lt Almond	MT562-2ST	MT563-2ST
		Brown	MT562-2S	MT563-2S
		Gray	MT562-2SG	MT563-2SG
		Black	MT562-2SE	MT563-2SE
		Red	MT562-2SR	MT563-2SR
		Green	MT562-2SN	MT563-2SN
		Blue	MT562-2SU	MT563-2SU
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Split-Circuit - Separate lead provided	White	MT562-SCW	MT563-SCW
		Ivory	MT562-SCI	MT563-SCI
		Lt Almond	MT562-SCT	MT563-SCT
		Brown	MT562-SC	MT563-SC
		Gray	MT562-SCG	MT563-SCG
		Black	MT562-SCE	MT563-SCE
		Red	MT562-SCR	MT563-SCR
		Blue	MT562-SCB	MT563-SCB
	- Duplex Receptacle - Smooth Face - Split-Circuit, One Outlet Marked "Controlled" - Separate lead provided for controlled receptacle	White	M5262-1CW	M5362-1CW
		Ivory	M5262-1CI	M5362-1CI
		Lt Almond	M5262-1CT	M5362-1CT
		Brown	M5262-1C	M5362-1C
		Gray	M5262-1CG	M5362-1CG
		Black	M5262-1CE	M5362-1CE
		Red	M5262-1CR	M5362-1CR
		Blue	M5262-1CB	M5362-1CB
	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Split-Circuit, One Outlet Marked "Controlled" - Separate lead provided for controlled receptacle	White	MT562-1CW	MT563-1CW
		Ivory	MT562-1CI	MT563-1CI
		Lt Almond	MT562-1CT	MT563-1CT
		Brown	MT562-1C	MT563-1C
		Gray	MT562-1CG	MT563-1CG
		Black	MT562-1CE	MT563-1CE
		Red	MT562-1CR	MT563-1CR
		Blue	MT562-1CB	MT563-1CB



M5362-2SW



M5362-SCI

Receptacle modules are available in both stranded and solid wire. Options for 4-port push wire connectors are also available. See pg 28 for module details.



Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty			NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
STANDARD	- Duplex Receptacle - Smooth Face - Tamper-Resistant - Isolated Ground	White	MT562-IGW	MT563-IGW
		Ivory	MT562-IGI	MT563-IGI
		Lt Almond	MT562-IGT	MT563-IGT
		Gray	MT562-IGG	MT563-IGG
		Black	MT562-IGE	MT563-IGE
		Red	MT562-IGR	MT563-IGR
		Orange	MT562-IG	MT563-IG
		White	M1626-W	M1636-W
		Ivory	M1626-I	M1636-I
		Lt Almond	M1626-T	M1636-T
DECORA PLUS™	- Duplex Receptacle - Smooth Face	Brown	M1626	M1636
		Gray	M1626-GY	M1636-GY
		Black	M1626-E	M1636-E
		Red	M1626-R	M1636-R
		Blue	M1626-B	M1636-B
	- Duplex Receptacle - Smooth Face - Tamper-Resistant	White	MT162-W	MT163-W
		Ivory	MT162-I	MT163-I
		Lt Almond	MT162-T	MT163-T
		Brown	MT162	MT163
		Gray	MT162-GY	MT163-GY
		Black	MT162-E	MT163-E
		Red	MT162-R	MT163-R
		Blue	MT162-B	MT163-B
	- Duplex Receptacle - Smooth Face - Two Outlets Marked "Controlled"	White	M1626-2SW	M1636-2SW
		Ivory	M1626-2SI	M1636-2SI
		Lt Almond	M1626-2ST	M1636-2ST
		Brown	M1626-2S	M1636-2S
		Gray	M1626-2SG	M1636-2SG
		Black	M1626-2SE	M1636-2SE
		Red	M1626-2SR	M1636-2SR
		Green	M1626-2SN	M1636-2SN
		Blue	M1626-2SU	M1636-2SU
	- Duplex Receptacle - Smooth Face - Split-Circuit - Separate lead provided	White	M1626-SCW	M1636-SCW
		Ivory	M1626-SCI	M1636-SCI
		Lt Almond	M1626-SCT	M1636-SCT
		Brown	M1626-SC	M1636-SC
		Gray	M1626-SCG	M1636-SCG
		Black	M1626-SCE	M1636-SCE
		Red	M1626-SCR	M1636-SCR
		Blue	M1626-SCB	M1636-SCB



Receptacles must be used with MSTWL series wiring modules (sold separately). See pg 28 for module details.




Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty

2-Pole, 3-Wire • 125 Volt		Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
- Duplex Receptacle - Smooth Face - Isolated Ground 		White	M1626-IGW	M1636-IGW
		Ivory	M1626-IGI	M1636-IGI
		Lt Almond	M1626-IGT	M1636-IGT
		Gray	M1626-IGG	M1636-IGG
		Black	M1626-IGE	M1636-IGE
		Red	M1626-IGR	M1636-IGR
		Orange	M1626-IG	M1636-IG
- Duplex Receptacle - Smooth Face - Split-Circuit, One Outlet Marked "Controlled" 		White	M1626-1CW	M1636-1CW
		Ivory	M1626-1CI	M1636-1CI
		Lt Almond	M1626-1CT	M1636-1CT
		Brown	M1626-1C	M1636-1C
		Gray	M1626-1CG	M1636-1CG
		Black	M1626-1CE	M1636-1CE
		Red	M1626-1CR	M1636-1CR
		Blue	M1626-1CB	M1636-1CB
DECORA PLUS™ - Duplex Receptacle - Smooth Face - Tamper-Resistant - Two Outlets Marked "Controlled"  		White	MT162-2W	MT163-2W
		Ivory	MT162-2I	MT163-2I
		Lt Almond	MT162-2T	MT163-2T
		Brown	MT162-2	MT163-2
		Gray	MT162-2GY	MT163-2GY
		Black	MT162-2E	MT163-2E
		Red	MT162-2R	MT163-2R
		Green	MT162-2GN	MT163-2GN
		Blue	MT162-2BU	MT163-2BU
- Duplex Receptacle - Smooth Face - Tamper-Resistant - Split-Circuit - Separate lead provided 		White	MT162-SCW	MT163-SCW
		Ivory	MT162-SCI	MT163-SCI
		Lt Almond	MT162-SCT	MT163-SCT
		Brown	MT162-SC	MT163-SC
		Gray	MT162-SCG	MT163-SCG
		Black	MT162-SCE	MT163-SCE
		Red	MT162-SCR	MT163-SCR
		Blue	MT162-SCB	MT163-SCB
- Duplex Receptacle - Smooth Face - Tamper-Resistant - Isolated Ground  		White	MT162-IGW	MT163-IGW
		Ivory	MT162-IGI	MT163-IGI
		Lt Almond	MT162-IGT	MT163-IGT
		Gray	MT162-IGG	MT163-IGG
		Black	MT162-IGE	MT163-IGE
		Red	MT162-IGR	MT163-IGR
		Orange	MT162-IG	MT163-IG

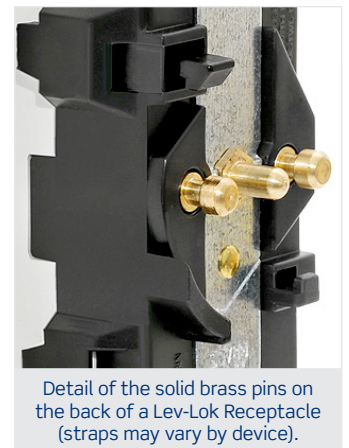

Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty

2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Split-Circuit, One Outlet Marked "Controlled"
- Separate lead provided for controlled receptacle



White	MT162-1CW	MT163-1CW
Ivory	MT162-1CI	MT163-1CI
Lt Almond	MT162-1CT	MT163-1CT
Brown	MT162-1C	MT163-1C
Gray	MT162-1CG	MT163-1CG
Black	MT162-1CE	MT163-1CE
Red	MT162-1CR	MT163-1CR
Blue	MT162-1CB	MT163-1CB



MT163-1CW

Lev-lok® Modular Wiring Devices: GFCI Receptacles

HOSPITAL GRADE

Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

DECORA PLUS™

- **SmartlockPro® Self-Test GFCI**
- Duplex Receptacle
- Power Indication LED
- Back and Side Wire
- 20 Amp Feed-Through Terminals



White	MGFN1-HGW	MGFN2-HGW
Ivory	MGFN1-HGI	MGFN2-HGI
Lt Almond	MGFN1-HGT	MGFN2-HGT
Brown	MGFN1-HG	MGFN2-HG
Gray	MGFN1-HGG	MGFN2-HGG
Black	MGFN1-HGE	MGFN2-HGE
Red	MGFN1-HGR	MGFN2-HGR

- **SmartlockPro® Self-Test GFCI**
- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Back and Side Wire
- 20 Amp Feed-Through Terminals



White	MGFT1-HGW	MGFT2-HGW
Ivory	MGFT1-HGI	MGFT2-HGI
Lt Almond	MGFT1-HGT	MGFT2-HGT
Brown	MGFT1-HG	MGFT2-HG
Gray	MGFT1-HGG	MGFT2-HGG
Black	MGFT1-HGE	MGFT2-HGE
Red	MGFT1-HGR	MGFT2-HGR



MGFT2-HGW

INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

DECORA PLUS™

- **SmartlockPro® Self-Test GFCI**
- Duplex Receptacle
- Power Indication LED
- 20 Amp Feed-Through Terminals



White	MGFN1-W	MGFN2-W
Ivory	MGFN1-I	MGFN2-I
Lt Almond	MGFN1-T	MGFN2-T
Brown	MGFN1	MGFN2
Gray	MGFN1-GY	MGFN2-GY
Black	MGFN1-E	MGFN2-E
Red	MGFN1-R	MGFN2-R

- **SmartlockPro® Self-Test GFCI**
- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- 20 Amp Feed-Through Terminals



White	MGFT1-W	MGFT2-W
Ivory	MGFT1-I	MGFT2-I
Lt Almond	MGFT1-T	MGFT2-T
Brown	MGFT1	MGFT2
Gray	MGFT1-GY	MGFT2-GY
Black	MGFT1-E	MGFT2-E
Red	MGFT1-R	MGFT2-R



MGFN2-GY

Lev-lok® Modular Wiring Devices: USB Receptacles

HOSPITAL GRADE Extra Heavy-Duty		NEMA 5-15R	NEMA 5-20R		
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
DECORA PLUS™	- Duplex Receptacle - Two Type A USB Ports - Smooth Face - Tamper-Resistant 	White	M56AA-HGW	M58AA-HGW	
		Ivory	M56AA-HGI	M58AA-HGI	
		Lt Almond	M56AA-HGT	M58AA-HGT	
		Brown	M56AA-HG	M58AA-HG	
		Gray	M56AA-HGG	M58AA-HGG	
		Black	M56AA-HGE	M58AA-HGE	
		Red	M56AA-HGR	M58AA-HGR	
	- Duplex Receptacle - One Type A & One Type C USB Port - Smooth Face - Tamper-Resistant 	White	M56AC-HGW	M58AC-HGW	
		Ivory	M56AC-HGI	M58AC-HGI	
		Lt Almond	M56AC-HGT	M58AC-HGT	
		Brown	M56AC-HG	M58AC-HG	
		Gray	M56AC-HGG	M58AC-HGG	
		Black	M56AC-HGE	M58AC-HGE	
		Red	M56AC-HGR	M58AC-HGR	
COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R	NEMA 5-20R		
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
DECORA PLUS™	- Duplex Receptacle - Two Type A USB Ports - Smooth Face - Tamper-Resistant 	White	M56AA-W	M58AA-W	
		Ivory	M56AA-I	M58AA-I	
		Lt Almond	M56AA-T	M58AA-T	
		Brown	M56AA	M58AA	
		Gray	M56AA-GY	M58AA-GY	
		Black	M56AA-E	M58AA-E	
		Red	M56AA-R	M58AA-R	
	- Duplex Receptacle - One Type A & One Type C USB Port - Smooth Face - Tamper-Resistant 	Orange	M56AA-O	M58AA-O	
		Green	M56AA-N	M58AA-N	
		Blue	M56AA-B	M58AA-B	
		- Duplex Receptacle - One Type A & One Type C USB Port - Smooth Face - Tamper-Resistant 	White	M56AC-W	M58AC-W
			Ivory	M56AC-I	M58AC-I
			Lt Almond	M56AC-T	M58AC-T
			Brown	M56AC	M58AC
Gray	M56AC-GY		M58AC-GY		
Black	M56AC-E		M58AC-E		
Red	M56AC-R		M58AC-R		
Orange	M56AC-O	M58AC-O			
Green	M56AC-N	M58AC-N			
Blue	M56AC-B	M58AC-B			



M58AA-HGR



M56AC-HGW

lev-lok® Circuit Analyzer

Connect the receptacle wiring module to the circuit analyzer to confirm that wiring is correct, or identify a wiring problem.
Catalog Number: LVLOK-TST



Lev-lok® Modular Wiring Device Modules

20 Amp, 125 Volt Max.	Module Color	Wire Type	Wire Colors	Cat. No.
Stranded Wire Leads	White	THHN	Black, White, Green	MSTWL-A
Stranded Wire Leads with Push Wire Connectors (4-Port Connector)	White	THHN	Black, White, Green	MSTWL-WST
Dual Module for 2-Gang Applications with Leads Pre-Installed in Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WTK
Stranded Wire Leads with Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WT6**
Stranded Wire Leads with Push Wire Connectors	Red	THHN	Black, White, Green	MSTWL-RT6**
Stranded Wire Leads for Emergency Circuits	Red	THHN	Black, White, Green	MSTWL-R
Stranded Wire Leads for Isolated Ground Circuits	Orange	THHN	Black, White, Green	MSTWL-IG
Stranded Wire Leads with Push Wire Connectors for Isolated Ground Circuits	Orange	THHN	Black, White, Green	MSTWL-WIG
Solid Wire Leads	White	THHN	Black, White, Green	MSTWL-SDA
Solid Wire Leads for Isolated Ground Circuits	Orange	THHN	Black, White, Green	MSTWL-SIG
Solid Wire Leads with Push Wire Connectors (4-Port Connector)	White	THHN	Black, White, Green	MSTWL-WSD
Solid Wire Leads with Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WD6**
Stranded Wire Leads for Low Leakage Circuits (For use in isolated power areas to comply with NEC 517.160)	White	XHHW-2	Brown/Yellow, Orange/Blue, Green/Yellow†	MSTWL-XI*
Stranded Wire Leads for Low Leakage Circuits	White	XHHW-2	Black, White, Green/Yellow	MSTWL-XN*

* Add suffix of 0 for 6", 1 for 18", 2 for 24" or 3 for 36" long leads. Please allow 4 to 6 weeks for delivery.

** 6-port connector only on ground lead. 4-port connector on the hot & neutral leads. Special order only configurations.

† Wire order is hot, neutral, ground.




M56AC-HGW
Lev-lok USB Receptacle
shown with
MSTWL-A Module
attached.

Receptacles with Pre-Wired Leads

KEY FEATURES & BENEFITS

- Prewired, pre-stripped leads
- Hot, neutral and ground prewired with #12 AWG stranded leads, 6" in length
- Eliminates the need to make pigtails
- Available in the most common configurations
- No terminal screws means faster wiring and no need to wrap device with electrical tape

HOSPITAL GRADE Heavy-Duty			NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp		
STANDARD	• Duplex Receptacle • Smooth Face • Pre-Wired Leads	White	8200-LW	8300-LW		
		Ivory	8200-LI	8300-LI		
		Brown	8200-L	8300-L		
		Gray	8200-LGY	8300-LGY		
		Black	—	8300-LE		
		Red	8200-LR	8300-LR		
	• Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	White	8200-CW	8300-CW		
		Ivory	8200-CI	8300-CI		
		Gray	8200-CGY	8300-CGY		
INDUSTRIAL SPECIFICATION GRADE Heavy-Duty			NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp		
STANDARD	• Duplex Receptacle • Smooth Face • Pre-Wired Leads	White	5262-LW	5362-LW		
		Ivory	5262-LI	5362-LI		
		Lt Almond	—	5362-LT		
		Brown	5262-L0	5362-L0		
		Gray	5262-LGY	5362-LGY		
		Black	5262-LE	5362-LE		
		Red	5262-LR	5362-LR		
	• Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	White	5262-CW	—		
		Ivory	5262-CI	—		
		Gray	5262-CGY	—		
COMMERCIAL SPECIFICATION GRADE			NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp		
STANDARD	• Duplex Receptacle • Smooth Face • Pre-Wired Leads	White	5040-W	5340-W		
		Ivory	5040-I	5340-I		
		Brown	—	5340		
		Gray	—	5340-GY		
	• Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	White	5040-CW	5340-CW		
		Ivory	5040-CI	5340-CI		
		Gray	5040-CGY	5340-CGY		

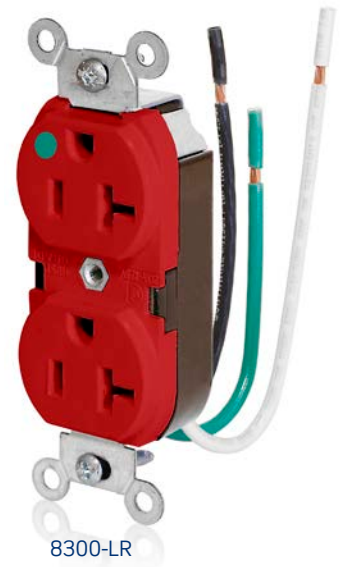

Receptacles with Pre-Wired Leads

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt

Color



15 Amp



20 Amp


DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Pre-Wired Leads

White	16252-LW	16352-LW
Ivory	16252-LI	16352-LI
Brown	16252-L0	—
Gray	16252-LGY	16352-LGY
Black	16252-LE	16352-LE

- Duplex Receptacle
- Smooth Face
- Pre-Wired Leads (hot and neutral only)

White	—	16352-CW
Ivory	—	16352-CI
Gray	—	16352-CGY

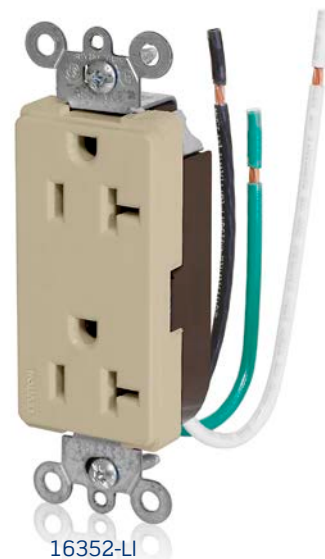

GFCI Receptacles with Pre-Wired Leads

INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt

Color



15 Amp



20 Amp

DECORA PLUS™

- SmartlockPro® Self-Test GFCI
- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- 5 Pre-Wired Leads
- 20 Amp Feed-Through Terminals




White	GFTR1-5LW	GFTR2-5LW
Ivory	GFTR1-5LI	GFTR2-5LI
Lt Almond	GFTR1-5LT	GFTR2-5LT
Brown	GFTR1-5L	GFTR2-5L
Gray	GFTR1-5LG	GFTR2-5LG
Black	GFTR1-5LE	GFTR2-5LE
Red	GFTR1-5LR	GFTR2-5LR

- SmartlockPro® Self-Test GFCI
- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- 3 Pre-Wired Leads (for non-feed through loads)



White	GFTR1-3LW	GFTR2-3LW
Ivory	GFTR1-3LI	GFTR2-3LI
Black	GFTR1-3LE	—

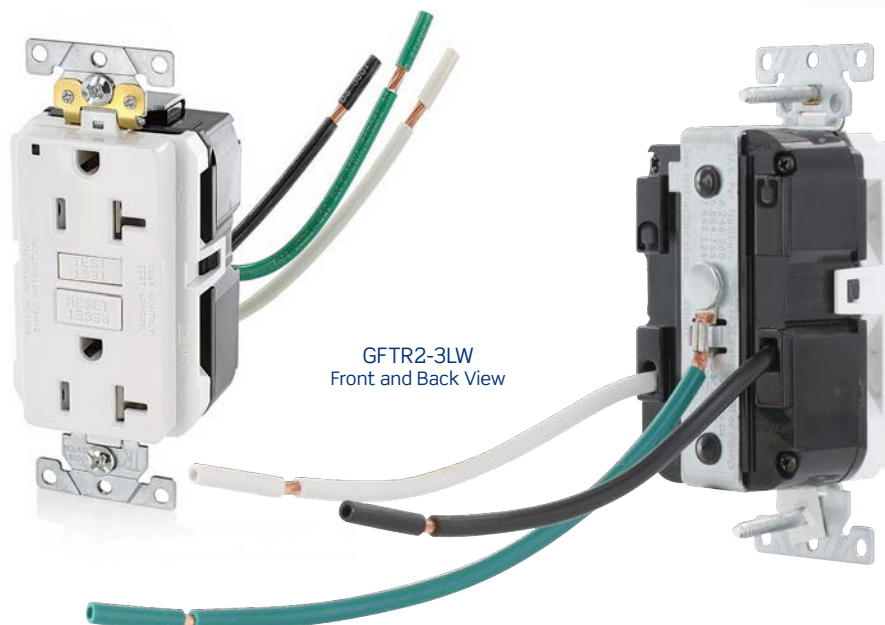

SmartlockPro® AFCI Receptacles

Outlet Branch Circuit (OBC) AFCI Devices offer advanced technology to help protect against electrical fires. These devices are designed to interrupt power in the event potentially hazardous arcing is detected, which could originate from a number of sources including damaged wires and cords. Meeting the latest UL requirements for OBC AFCI outlets, they provide protection against series and parallel arcs. SmartlockPro® OBC AFCI devices feature Leviton's patented reset lockout and tamper-resistant technology. AFCI's are now required by the National Electrical Code® (NEC) in many areas.

HOSPITAL GRADE Heavy-Duty			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R 	NEMA 5-20R 
DECORA PLUS™	Color	15 Amp	20 Amp
- Duplex Receptacle - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included  	White	AFTR1-HGW	AFTR2-HGW
	Ivory	AFTR1-HGI	AFTR2-HGI
	Lt Almond	AFTR1-HGT	AFTR2-HGT
	Brown	AFTR1-HG	AFTR2-HG
	Gray	AFTR1-HGG	AFTR2-HGG
	Black	AFTR1-HGE	AFTR2-HGE
	Red	AFTR1-HGR	AFTR2-HGR
COMMERCIAL SPECIFICATION GRADE			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R 	NEMA 5-20R 
DECORA®	Color	15 Amp	20 Amp
- Duplex Receptacle - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included  	White	AFTR1-W	AFTR2-W
	Ivory	AFTR1-I	AFTR2-I
	Lt Almond	AFTR1-T	AFTR2-T
	Brown	AFTR1	AFTR2
	Gray	AFTR1-GY	AFTR2-GY
	Black	AFTR1-E	AFTR2-E
- Blank Face Receptacle - Power Indication LED - Back and Side Wire 20 Amp Feed-Through Terminals 	White	—	AFRBF-W
	Ivory	—	AFRBF-I
	Lt Almond	—	AFRBF-T



SmartlockPro® GFCI Receptacles

The SmartlockPro® Self-Test GFCIs contain the latest innovation in ground fault protection by automatically conducting a periodic internal test to confirm that the GFCI is able to respond to a ground fault. Easy to install, they take up to 25% less space in the wallbox vs. typical GFCIs and can fit into any box, even shallow ones. These slim GFCIs provide all the lockout benefits of our standard SmartlockPro® offering, and are available in tamper-resistant and non tamper-resistant versions. Constructed of resilient thermoplastic and able to withstand high torque levels, self-test GFCIs come in styles for every need, including a combination guide light/receptacle and a blankface device.

UNDERSTANDING THE GFCI STATUS INDICATOR LIGHT

Leviton GFCI devices feature an LED Status Indicator Light which provides a visual indication to the user of the status of GFCI protection. This is a convenient way to check the level of protection at-a-glance.




Green LED - Normal Operation.

- GFCI has passed self-test and is providing power



Red LED - Alert!

- Blinking - Initial self-test upon first power up
- Solid or blinking - Press TEST and RESET buttons to reset GFCI
- If GFCI will not reset OR solid or blinking red continues, replace device



No LED - No Power.

- GFCI in tripped state
- Press RESET button
- If GFCI will not reset, no power on the circuit



GFNT2-HGW FRONT

Leviton GFCIs feature a slim profile for easier installations



GFNT2-HGW SIDE

HOSPITAL GRADE Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt

- Duplex Receptacle
- Power Indication LED
- Back and Side Wire
- 20 Amp Feed-Through Terminals
- Wallplate Included



- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Back and Side Wire
- 20 Amp Feed-Through Terminals
- Wallplate Included



Color

NEMA 5-15R



15 Amp

NEMA 5-20R



20 Amp

White	GFNT1-HGW	GFNT2-HGW
Ivory	GFNT1-HGI	GFNT2-HGI
Lt Almond	GFNT1-HGT	GFNT2-HGT
Brown	GFNT1-HG	GFNT2-HG
Gray	GFNT1-HGG	GFNT2-HGG
Black	GFNT1-HGE	GFNT2-HGE
Red	GFNT1-HGR	GFNT2-HGR
White	GFTR1-HGW	GFTR2-HGW
Ivory	GFTR1-HGI	GFTR2-HGI
Lt Almond	GFTR1-HGT	GFTR2-HGT
Brown	GFTR1-HG	GFTR2-HG
Gray	GFTR1-HGG	GFTR2-HGG
Black	GFTR1-HGE	GFTR2-HGE
Red	GFTR1-HGR	GFTR2-HGR

SmartlockPro® GFCI Receptacles

HOSPITAL GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp


20 Amp

DECORA PLUS™	- Duplex Receptacle - Power Indication LED - Weather and Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included   	- White - Ivory - Lt Almond - Brown - Gray - Black - Red	- GFWT1-HGW - GFWT1-HGI - GFWT1-HGT - GFWT1-HG - GFWT1-HGG - GFWT1-HGE - GFWT1-HGR	- GFWT2-HGW - GFWT2-HGI - GFWT2-HGT - GFWT2-HG - GFWT2-HGG - GFWT2-HGE - GFWT2-HGR
	- Duplex Receptacle - Tamper-Resistant - WHITE Guidelight - Power Indication LED - Back and Side Wire 20 Amp Feed-Through Terminals - Wallplate Included  	- White - Ivory - Lt Almond - Brown - Gray - Black - Red	- GFNL1-HGW - GFNL1-HGI - GFNL1-HGT - GFNL1-HG - GFNL1-HGG - GFNL1-HGE - GFNL1-HGR	- GFNL2-HGW - GFNL2-HGI - GFNL2-HGT - GFNL2-HG - GFNL2-HGG - GFNL2-HGE - GFNL2-HGR
	- Duplex Receptacle - Tamper-Resistant - AMBER Guidelight - Power Indication LED - Back and Side Wire 20 Amp Feed-Through Terminals  	White	—	GFNL2-HWA
	- Duplex Receptacle - DIN Rail Mount - Power Indication LED - Terminal Blocks 20 Amp Feed-Through Terminals - Grounding 	Black	GFNT1-DIN	GFNT2-DIN

Amber guidelight ideal for healthcare applications where disrupting circadian rhythms is a concern



GFTR1-HGI
(with included wallplate)

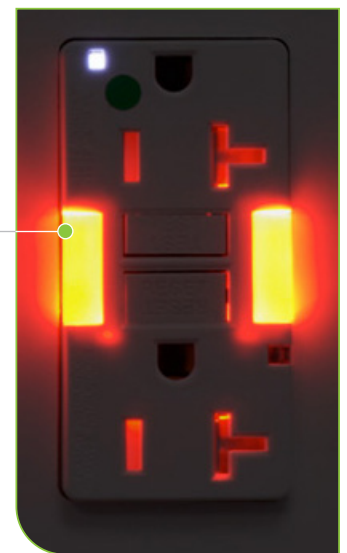

GFNL2-HWA

INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

DECORA PLUS™	- Duplex Receptacle - Power Indication LED - Back and Side Wire 20 Amp Feed-Through Terminals 	- White - Ivory - Lt Almond - Brown - Gray - Black - Red	- G5262-W - G5262-I - G5262-T - G5262 - G5262-GY - G5262-E - G5262-R	- G5362-W - G5362-I - G5362-T - G5362 - G5362-GY - G5362-E - G5362-R
	- Duplex Receptacle - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals  	- White - Ivory - Lt Almond - Brown - Gray - Black - Red	- G5262-TW - G5262-TI - G5262-TT - G5262-T0 - G5262-TGY - G5262-TE - G5262-TR	- G5362-TW - G5362-TI - G5362-TT - G5362-T0 - G5362-TGY - G5362-TE - G5362-TR



G 5362-TT

SmartlockPro® GFCI Receptacles

INDUSTRIAL SPECIFICATION GRADE

Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt

Color

NEMA 5-15R

15 Amp

NEMA 5-20R

20 Amp

DECORA PLUS™

- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Isolated Ground
- Back and Side Wire
- 20 Amp Feed-Through Terminals



White	GFTR1-IGW	GFTR2-IGW
Ivory	GFTR1-IGI	GFTR2-IGI
Lt Almond	GFTR1-IGT	GFTR2-IGT
Brown	GFTR1-IG	GFTR2-IG
Gray	GFTR1-IGG	GFTR2-IGG
Black	GFTR1-IGE	GFTR2-IGE
Red	GFTR1-IGR	GFTR2-IGR
Orange	GFTR1-IGO	GFTR2-IGO

- Duplex Receptacle
- Weather and Tamper-Resistant
- Power Indication LED
- Back and Side Wire
- 20 Amp Feed-Through Terminals
- Wallplate Included



White	G5262-WTW	G5362-WTW
Ivory	G5262-WTI	G5362-WTI
Lt Almond	G5262-WTT	G5362-WTT
Brown	G5262-WT	G5362-WT
Gray	G5262-WTG	G5362-WTG
Black	G5262-WTE	G5362-WTE
Red	G5262-WTR	G5362-WTR

- Single Receptacle
- Tamper-Resistant
- Pilot Light (Illuminated - ON)
- Back and Side Wire
- 20 Amp Feed-Through Terminals
- Wallplate Included



White	GFPL1-PLW	GFPL2-PLW
Ivory	GFPL1-PLI	GFPL2-PLI
Lt Almond	GFPL1-PLT	GFPL2-PLT
Brown	GFPL1-PL	GFPL2-PL
Gray	GFPL1-PLG	GFPL2-PLG
Black	GFPL1-PLE	GFPL2-PLE
Red	GFPL1-PLR	GFPL2-PLR

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt

Color

NEMA 5-15R

15 Amp

NEMA 5-20R

20 Amp

DECORA®

- Duplex Receptacle
- Power Indication LED
- Back and Side Wire
- 20 Amp Feed-Through Terminals
- Wallplate Included



White	GFNT1-W	GFNT2-W
Ivory	GFNT1-I	GFNT2-I
Lt Almond	GFNT1-T	GFNT2-T
Brown	GFNT1	GFNT2
Gray	GFNT1-GY	GFNT2-GY
Black	GFNT1-E	GFNT2-E
Red	—	GFNT2-R

- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Back and Side Wire
- 20 Amp Feed-Through Terminals
- Wallplate Included



White	GFTR1-W	GFTR2-W
Ivory	GFTR1-I	GFTR2-I
Lt Almond	GFTR1-T	GFTR2-T
Brown	GFTR1	GFTR2
Gray	GFTR1-GY	GFTR2-GY
Black	GFTR1-E	GFTR2-E
Red	—	GFTR2-R



GFTR2-IGO



GFPL2-PLG



GFNT2-R

SmartlockPro® GFCI Receptacles

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt

Color

NEMA
5-15R

15 Amp

NEMA
5-20R

20 Amp

DECORA®	- Duplex Receptacle - Power Indication LED - Weather-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals  	White	GFWR1-W*	GFWR2-W*
		Black	GFWR1-E*	GFWR2-E*
	- Duplex Receptacle - Power Indication LED - Weather and Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals   	White	GFWT1-W*	GFWT2-W*
		Ivory	GFWT1-I*	GFWT2-I*
		Lt Almond	GFWT1-T*	GFWT2-T*
		Gray	GFWT1-GY*	GFWT2-GY*
		Black	GFWT1-E*	GFWT2-E*
	- Duplex Receptacle Guidelight - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals  	White	GFNL1-W	GFNL2-W
		Ivory	GFNL1-I	GFNL2-I
		Lt Almond	GFNL1-T	GFNL2-T
		Black	GFNL1-E	—
	- Duplex Receptacle - Power Indication LED - Tamper-Resistant - Audible Trip Alert - Back and Side Wire 20 Amp Feed-Through Terminals    - Wallplate Included	White	GFTA1-W	GFTA2-W
		Ivory	GFTA1-I	GFTA2-I
		Lt Almond	GFTA1-T	GFTA2-T
	- Combination Switch with Single Receptacle - Power Indication LED - Tamper-Resistant - Back and Side Wire 20 Amp Feed-Through Terminals   - Wallplate Included	White	GFSW1-W	—
		Ivory	GFSW1-I	—
		Lt Almond	GFSW1-T	—



* No self-grounding clip on device

SmartlockPro® Dual Function AFCI/GFCI Receptacles

The SmartlockPro AFCI/GFCI Receptacle offers an effective alternative to a Dual Function breaker and features the convenience of localized test and reset. It provides clear visual indication of status making it intuitive for users to assess various conditions such as power availability and GFCI self-test status. The device also distinguishes between a trip caused by a ground fault and a trip caused by an arc fault.

UNDERSTANDING THE DUAL FUNCTION AFCI/GFCI STATUS INDICATOR LIGHT



Solid Green LED.

- Load Power ON.
- RESET button is in.
Device is in normal working state.
- Load Power OFF.
- RESET button is out.
Line & load wires are reversed.



Solid or Constant Flashing Red LED.

- Load Power ON.
- RESET button is in.
Press TEST button & RESET button.
If RED indication continues or will not RESET, replace device.
- Load Power OFF.
- RESET button is out.
Device has tripped & self-test function detects a potential problem.
If RED indication continues or will not RESET, replace device.



LED OFF & Flashes Red Twice Every 5 Seconds.

- Load Power OFF.
- RESET button is out.
AFCI trip; press RESET, if device continues to trip, contact an electrician.



LED is OFF.

- Load Power OFF.
RESET button is out.
GFCI trip; press RESET, if device will not reset, there is no power on the circuit.

HOSPITAL GRADE Heavy-Duty

2-Pole, 3-Wire • 125 Volt

- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Back and Side Wire
- 20 Amp Feed-Through Terminals
- Wallplate NOT Included



Color

White
Ivory
Lt Almond
Brown
Gray
Black
Red

NEMA
5-15R



15 Amp

AGTR1-HGW
AGTR1-HGI
AGTR1-HGT
AGTR1-HG
AGTR1-HGG
AGTR1-HGE
AGTR1-HGR

NEMA
5-20R



20 Amp

AGTR2-HGW
AGTR2-HGI
AGTR2-HGT
AGTR2-HG
AGTR2-HGG
AGTR2-HGE
AGTR2-HGR

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt

- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Back and Side Wire
- 20 Amp Feed-Through Terminals
- Wallplate Included



Color

White
Ivory
Lt Almond
Brown
Gray
Black

NEMA
5-15R



15 Amp

AGTR1-W
AGTR1-I
AGTR1-T
AGTR1
AGTR1-GY
AGTR1-E

NEMA
5-20R



20 Amp

AGTR2-W
AGTR2-I
AGTR2-T
AGTR2
AGTR2-GY
AGTR2-E



AGTR2-HGT

Surge Protective Receptacles

The value of these receptacles and ease of installation allow for placement anywhere you have a standard electrical outlet. With a small investment, you have the assurance that your equipment is well protected, from a heart monitor in the emergency room, to a computer in the office, or a big screen TV in the living room.

HOSPITAL GRADE Heavy-Duty		NEMA 5-15R	NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp	
DECORA PLUS™	- Duplex Receptacle - Indicator Light - Back and Side Wire - Wallplate Included	White	8280-W	8380-W
		Ivory	8280-I	8380-I
		Lt Almond	8280-T	—
		Brown	8280	8380
		Gray	—	8380-GY
		Red	8280-R	8380-R
		Blue	8280-B	8380-B
	- Single Receptacle - Indicator Light - Audible Alarm - Back and Side Wire - Wallplate Included	Ivory	—	8381-I
	- Duplex Receptacle - Indicator Light - Audible Alarm - Isolated Ground - Back and Side Wire - Wallplate Included	White	8280-IGW	8380-IGW
		Ivory	8280-IGI	8380-IGI
Gray		—	8380-IGG	
Orange		8280-IGO	8380-IGO	
Blue		8280-IGB	8380-IGB	

COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R	NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		15 Amp	20 Amp	
DECORA PLUS™	- Duplex Receptacle - Indicator Light - Back and Side Wire - Wallplate Included	White	5280-W	5380-W
		Ivory	5280-I	5380-I
		Lt Almond	5280-T	—
		Brown	5280	5380
		Gray	5280-GY	5380-GY
		Red	5280-R	5380-R
		Blue	5280-B	5380-B
	- Duplex Receptacle - Indicator Light - Isolated Ground - Back and Side Wire - Wallplate Included	White	5280-IGW	5380-IGW
		Ivory	5280-IGI	5380-IGI
		Brown	5280-IG	5380-IG
Gray		—	5380-IGG	
- Duplex Receptacle - Indicator Light - Audible Alarm - Back and Side Wire - Wallplate Included	Orange	5280-IGO	5380-IGO	
	Blue	5280-IGB	5380-IGB	
	White	7280-W	7380-W	
	Ivory	7280-I	7380-I	
- Audible Alarm - Back and Side Wire - Wallplate Included	Lt Almond	7280-T	—	
	Gray	—	7380-GY	
	Blue	7280-B	7380-B	



Marked “Controlled” Receptacles

For use with plug load control systems

The National Electrical Code requires all 15 A & 20 A, 125 V receptacles that are automatically controlled to be marked with a specific symbol and the word “CONTROLLED” on the receptacle.

- Decora Plus™ and Standard Duplex options
- Conventionally wired, Lever Edge™, and Lev-Lok® modular wiring system platforms available
- Control either one outlet or both outlets
 - For conventionally wired devices with one marked “controlled” receptacle, “hot” tab is split
 - For Lev-Lok devices with one marked “controlled” receptacle, an additional “hot” contact is split internally, and a separate lead is provided for the controlled receptacle

Plug load control automatically turns off plug loads when a space is vacated. IECC, ASHRAE 90.1, and Title 24 require sensor- or schedule-based control with controlled receptacles.

Learn more at
leviton.com/plugloadcontrol



HOSPITAL GRADE Heavy-Duty		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
STANDARD	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled” • Back and Side Wire 	White	8200-H2W	8300-H2W	
		Ivory	8200-H2I	8300-H2I	
		Gray	8200-H2G	8300-H2G	
		Black	8200-H2E	8300-H2E	
		Red	8200-H2R	8300-H2R	
	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked “Controlled” • Back and Side Wire 	White	8200-H1W	8300-H1W	
		Ivory	8200-H1I	8300-H1I	
		Gray	8200-H1G	8300-H1G	
		Black	8200-H1E	8300-H1E	
		Red	8200-H1R	8300-H1R	
	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled” • Tamper-Resistant • Back and Side Wire  	White	T8200-2PW	T8300-2PW	
		Ivory	T8200-2PI	T8300-2PI	
		Gray	T8200-2PG	T8300-2PG	
		Black	T8200-2PE	T8300-2PE	
		Red	T8200-2PR	T8300-2PR	
	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked “Controlled” • Tamper-Resistant • Back and Side Wire  	White	T8200-1PW	T8300-1PW	
		Ivory	T8200-1PI	T8300-1PI	
		Gray	T8200-1PG	T8300-1PG	
	Black	T8200-1PE	T8300-1PE		
	Red	T8200-1PR	T8300-1PR		
DECORA PLUS™	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled” • Back and Side Wire 	White	D8200-H2W	D8300-H2W	
	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked “Controlled” • Back and Side Wire 	White	D8200-H1W	D8300-H1W	
	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled” • Tamper-Resistant • Back and Side Wire  	White	DT820-S2W	DT830-S2W	



Marked "Controlled" Receptacles

HOSPITAL GRADE Heavy-Duty		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
DECORA PLUS™	- Duplex Receptacle - Smooth Face - Split-Circuit, One Outlet Marked “Controlled” - Tamper-Resistant - Back and Side Wire	White	DT820-S1W	DT830-S1W	
	 				
	INDUSTRIAL SPECIFICATION GRADE Extra Heavy-Duty				
	NEMA 5-15R 				
	NEMA 5-20R 				
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
STANDARD	- Duplex Receptacle - Smooth Face - Two Outlets Marked “Controlled” - Tamper-Resistant - Back and Side Wire	White	5262-2PW	5362-2PW	
		Ivory	5262-2PI	5362-2PI	
		Lt Almond	5262-2PT	5362-2PT	
		Brown	5262-2P	5362-2P	
		Gray	5262-2PG	5362-2PG	
		Black	5262-2PE	5362-2PE	
		Red	5262-2PR	5362-2PR	
	 	Green	—	5362-2PN	
		Blue	5262-2PB	5362-2PB	
	- Duplex Receptacle - Smooth Face - Split-Circuit, One Outlet Marked “Controlled” - Tamper-Resistant - Back and Side Wire	White	5262-1PW	5362-1PW	
		Ivory	5262-1PI	5362-1PI	
		Lt Almond	5262-1PT	5362-1PT	
		Brown	5262-1P	5362-1P	
		Gray	5262-1PG	5362-1PG	
		Black	5262-1PE	5362-1PE	
	 	Red	5262-1PR	5362-1PR	
		Blue	5262-1PB	5362-1PB	
INDUSTRIAL SPECIFICATION GRADE Heavy-Duty		NEMA 5-15R 	NEMA 5-20R 		
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
STANDARD	- Duplex Receptacle - Smooth Face - Two Outlets Marked “Controlled” - Back and Side Wire	White	5262-S2W	5362-S2W	
		Ivory	5262-S2I	5362-S2I	
		Lt Almond	5262-S2T	5362-S2T	
		Brown	5262-S2	5362-S2	
		Gray	5262-S2G	5362-S2G	
		Black	5262-S2E	5362-S2E	
		Red	5262-S2R	5362-S2R	
		Green	—	5362-S2N	
		Blue	5262-S2B	5362-S2B	
	- Duplex Receptacle - Smooth Face - Split-Circuit, One Outlet Marked “Controlled” - Back and Side Wire	White	5262-S1W	5362-S1W	
		Ivory	5262-S1I	5362-S1I	
		Lt Almond	5262-S1T	5362-S1T	
		Brown	5262-S1	5362-S1	
		Gray	5262-S1G	5362-S1G	
		Black	5262-S1E	5362-S1E	
		Red	5262-S1R	5362-S1R	
		Green	—	5362-S1N	
	Blue	5262-S1B	5362-S1B		



Marked "Controlled" Receptacles

INDUSTRIAL SPECIFICATION GRADE

Heavy-Duty



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

DECORA PLUS™	- Duplex Receptacle - Smooth Face - Two Outlets Marked "Controlled" - Back and Side Wire	White	16252-2PW	16352-2PW
		Ivory	16252-2PI	16352-2PI
		Lt Almond	16252-2PT	16352-2PT
		Brown	16252-2P	16352-2P
		Gray	16252-2PG	16352-2PG
		Black	16252-2PE	16352-2PE
		Red	16252-2PR	16352-2PR
		Blue	16252-2PB	16352-2PB
	- Duplex Receptacle - Smooth Face - Two Outlets Marked "Controlled" - Tamper-Resistant - Back and Side Wire	White	TDR15-S2W	TDR20-S2W
		Ivory	TDR15-S2I	TDR20-S2I
		Lt Almond	TDR15-S2T	TDR20-S2T
		Brown	TDR15-S2	TDR20-S2
	- Duplex Receptacle - Smooth Face - Split-Circuit, One Outlet Marked "Controlled" - Back and Side Wire	White	16252-1PW	16352-1PW
		Ivory	16252-1PI	16352-1PI
		Lt Almond	16252-1PT	16352-1PT
		Brown	16252-1P	16352-1P
	- Duplex Receptacle - Smooth Face - Split-Circuit, One Outlet Marked "Controlled" - Tamper-Resistant - Back and Side Wire	Gray	16252-1PG	16352-1PG
		Black	16252-1PE	16352-1PE
		Red	16252-1PR	16352-1PR
		Blue	16252-1PB	16352-1PB
	- Duplex Receptacle - Smooth Face - Split-Circuit, One Outlet Marked "Controlled" - Tamper-Resistant - Back and Side Wire	White	TDR15-S1W	TDR20-S1W
		Ivory	TDR15-S1I	TDR20-S1I
		Lt Almond	TDR15-S1T	TDR20-S1T
		Brown	TDR15-S1	TDR20-S1
	- Duplex Receptacle - Smooth Face - Split-Circuit, One Outlet Marked "Controlled" - Tamper-Resistant - Back and Side Wire	Gray	TDR15-S1G	TDR20-S1G
		Black	TDR15-S1E	TDR20-S1E

COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125 Volt

Color

15 Amp

20 Amp

STANDARD	- Duplex Receptacle - Smooth Face - Two Outlets Marked "Controlled" - Side Wire Only	White	CR015-2PW	CR020-2PW
		Ivory	CR015-2PI	CR020-2PI
		Lt Almond	CR015-2PT	CR020-2PT
		Gray	CR015-2PG	CR020-2PG
		Black	CR015-2PE	CR020-2PE
		Green	CR015-2PN	CR020-2PN
	- Duplex Receptacle - Smooth Face - Two Outlets Marked "Controlled" - Tamper-Resistant - Back and Side Wire	White	TBR15-S2W	TBR20-S2W
		Ivory	TBR15-S2I	TBR20-S2I
		Lt Almond	TBR15-S2T	TBR20-S2T
		Brown	TBR15-S2	TBR20-S2
		Gray	TBR15-S2G	TBR20-S2G
		Black	TBR15-S2E	TBR20-S2E
	- Duplex Receptacle - Smooth Face - Two Outlets Marked "Controlled" - Tamper-Resistant - Back and Side Wire	Green	TBR15-S2N	TBR20-S2N



Marked "Controlled" Receptacles

COMMERCIAL SPECIFICATION GRADE			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R	NEMA 5-20R
STANDARD	Color	15 Amp	20 Amp
	White	CR015-1PW	CR020-1PW
	Ivory	CR015-1PI	CR020-1PI
	Lt Almond	CR015-1PT	CR020-1PT
	Gray	CR015-1PG	CR020-1PG
	Black	CR015-1PE	CR020-1PE
	Green	CR015-1PN	CR020-1PN
	White	TBR15-S1W	TBR20-S1W
	Ivory	TBR15-S1I	TBR20-S1I
	Lt Almond	TBR15-S1T	TBR20-S1T
	Brown	TBR15-S1	TBR20-S1
	Gray	TBR15-S1G	TBR20-S1G
	Black	TBR15-S1E	TBR20-S1E
	Green	TBR15-S1N	TBR20-S1N



Marked "Controlled" GFCI Receptacles

HOSPITAL GRADE Heavy-Duty			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R	NEMA 5-20R
DECORA PLUS™	Color	15 Amp	20 Amp
	White	GFTR1-H2W	GFTR2-H2W
	Ivory	GFTR1-H2I	GFTR2-H2I
	Gray	GFTR1-H2G	GFTR2-H2G
	Black	GFTR1-H2E	GFTR2-H2E
	Red	GFTR1-H2R	GFTR2-H2E

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty			
2-Pole, 3-Wire • 125 Volt		NEMA 5-15R	NEMA 5-20R
DECORA PLUS™	Color	15 Amp	20 Amp
	White	—	G5362-2TW
	Ivory	—	G5362-2TI
	Lt Almond	—	G5362-2TT
	Brown	—	G5362-2T0
	Gray	—	G5362-2TG
	Black	—	G5362-2TE
	Red	—	G5362-2TR
	Green	—	G5362-2TN



Marked "Controlled" USB Receptacles

HOSPITAL GRADE Extra Heavy-Duty		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
DECORA PLUS™	- Duplex Receptacle - Two Outlets Marked "Controlled" - Two Type A USB Ports (3.6 Amp) - Smooth Face - Tamper-Resistant - Back and Side Wire 	White	T5632-H2W	T5832-H2W	
		Ivory	T5632-H2I	T5832-H2I	
		Lt Almond	T5632-H2T	T5832-H2T	
		Gray	T5632-H2G	T5832-H2G	
		Black	T5632-H2E	T5832-H2E	
		Red	T5632-H2R	T5832-H2R	
	- Duplex Receptacle - Two Outlets Marked "Controlled" - One Type A & One Type C USB Port (5.1 Amp) - Smooth Face - Tamper-Resistant - Back and Side Wire 	White	T5633-H2W	T5833-H2W	
		Ivory	T5633-H2I	T5833-H2I	
		Lt Almond	T5633-H2T	T5833-H2T	
		Gray	T5633-H2G	T5833-H2G	
		Black	T5633-H2E	T5833-H2E	
		Red	T5633-H2R	T5833-H2R	

COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
DECORA PLUS™	- Duplex Receptacle - Two Outlets Marked "Controlled" - One Type A and One Type C USB Port - Tamper-Resistant - Back and Side Wire 	White	T5633-2W	T5833-2W	
		Ivory	T5633-2I	T5833-2I	
		Brown	T5633-2B	T5833-2B	
		Gray	T5633-2G	T5833-2G	
		Black	T5633-2E	T5833-2E	
		Green	T5633-2GN	T5833-2GN	
		Blue	T5633-2BU	T5833-2BU	

For Lev-lok Marked "Controlled" devices, please refer to Lev-lok section on page 18.



USB Receptacles

HOSPITAL GRADE Heavy-Duty

2-Pole, 3-Wire • 125 Volt

Color



15 Amp



20 Amp

DECORA PLUS™

- Duplex Receptacle
- USB, Two Type A Ports (3.6 Amp)
- Tamper-Resistant
- Back and Side Wire



White	T5632-HGW	T5832-HGW
Ivory	T5632-HGI	T5832-HGI
Lt Almond	T5632-HGT	T5832-HGT
Brown	T5632-HG	T5832-HG
Gray	T5632-HGG	T5832-HGG
Black	T5632-HGE	T5832-HGE
Red	T5632-HGR	T5832-HGR

- Duplex Receptacle
- USB, One Type A & One Type C Port (5.1 Amp)
- Tamper-Resistant
- Back and Side Wire



White	T5633-HGW	T5833-HGW
Ivory	T5633-HGI	T5833-HGI
Lt Almond	T5633-HGT	T5833-HGT
Brown	T5633-HG	T5833-HG
Gray	T5633-HGG	T5833-HGG
Black	T5633-HGE	T5833-HGE
Red	T5633-HGR	T5833-HGR



T5832-HGW

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt

Color



15 Amp



20 Amp

DECORA®

- Duplex Receptacle
- Power Delivery USB, Two Type C Ports (6 Amp, 60W)
- Premium - Ultra
- Tamper-Resistant
- Wire Leads



White	CC1P6-W	CC2P6-W
Ivory	CC1P6-I	CC2P6-I
Lt Almond	CC1P6-T	CC2P6-T
Brown	CC1P6-B	CC2P6-B
Gray	CC1P6-GY	CC2P6-GY
Black	CC1P6-E	CC2P6-E

- Duplex Receptacle
- Power Delivery USB, One Type A & One Type C Port (4.5 Amp, 60W)
- Premium - Ultra
- Tamper-Resistant
- Wire Leads



White	AC1P6-W	AC2P6-W
Ivory	AC1P6-I	AC2P6-I
Lt Almond	AC1P6-T	AC2P6-T
Brown	AC1P6-B	AC2P6-B
Gray	AC1P6-GY	AC2P6-GY
Black	AC1P6-E	AC2P6-E

- Duplex Receptacle
- Power Delivery USB, Two Type C Ports (6 Amp, 30W)
- High-Speed
- Tamper-Resistant
- Back and Side Wire



White	CC1P3-W	CC2P3-W
Ivory	CC1P3-I	CC2P3-I
Lt Almond	CC1P3-T	CC2P3-T
Brown	CC1P3-B	CC2P3-B
Gray	CC1P3-GY	CC2P3-GY
Black	CC1P3-E	CC2P3-E

- Duplex Receptacle
- USB, Two Type C Ports (6 Amp, 30W)
- Fast Charging
- Tamper-Resistant
- Back and Side Wire



White	CC1X3-W	CC2X3-W
Ivory	CC1X3-I	CC2X3-I
Lt Almond	CC1X3-T	CC2X3-T
Brown	CC1X3-B	CC2X3-B
Gray	CC1X3-GY	CC2X3-GY
Black	CC1X3-E	CC2X3-E

- Duplex Receptacle
- USB, One Type A & One Type C Port (5.1 Amp, 27W)
- Fast Charging
- Tamper-Resistant
- Back and Side Wire



White	AC1X3-W	AC2X3-W
Ivory	AC1X3-I	AC2X3-I
Lt Almond	AC1X3-T	AC2X3-T
Brown	AC1X3-B	AC2X3-B
Gray	AC1X3-GY	AC2X3-GY
Black	AC1X3-E	AC2X3-E



CC1X3-W



AC2X3-W

USB Receptacles

COMMERCIAL SPECIFICATION GRADE			
2-Pole, 3-Wire • 125 Volt	Color	15 Amp	20 Amp
- Duplex Receptacle - USB, Two Type C Ports (6 Amp, 30W) - Tamper-Resistant - Back and Side Wire  	White	T5635-W	T5835-W
	Ivory	T5635-I	T5835-I
	Lt Almond	T5635-T	T5835-T
	Brown	T5635-B	T5835-B
	Gray	T5635-G	T5835-G
	Black	T5635-E	T5835-E
- Duplex Receptacle - USB, One Type A & One Type C Port (4.8 Amp, 24W) - Weather-Resistant - Wire Leads  	White	W5633-W	W5833-W
- Duplex Receptacle - USB, Two Type C Ports (3.6 Amp, 18W) - Standard, for everyday charging - Back and Side Wire 	White	BCC15-W	BCC20-W
	Ivory	BCC15-I	BCC20-I
	Lt Almond	BCC15-T	BCC20-T
	Brown	BCC15-B	BCC20-B
	Gray	BCC15-GY	BCC20-GY
	Black	BCC15-E	BCC20-E
- Duplex Receptacle - USB, One Type A & One Type C Port (3.6 Amp, 18W) - Standard, for everyday charging - Back and Side Wire 	White	BAC15-W	BAC20-W
	Ivory	BAC15-I	BAC20-I
	Lt Almond	BAC15-T	BAC20-T
	Brown	BAC15-B	BAC20-B
	Gray	BAC15-GY	BAC20-GY
	Black	BAC15-E	BAC20-E



Combination USB/GFCI Receptacles

COMMERCIAL SPECIFICATION GRADE			
2-Pole, 3-Wire • 125 Volt	Color	15 Amp	20 Amp
- Duplex Receptacle - Power Indication LED - USB, One Type A & One Type C Port (4.8 Amp, 24W) - SmartlockPro® GFCI - Tamper-Resistant - Wire Leads   	White	GUAC1-W	GUAC2-W
	Lt Almond	GUAC1-T	GUAC2-T
	Black	GUAC1-E	GUAC2-E



4-in-1™ Receptacles


Hospital Grade 4-in-1™ Receptacles provide a simple transition in retrofit applications to comply with new receptacle requirements in health care facilities. These devices allow you to increase the number of receptacles in your facility without having to pull new wires.

HOSPITAL GRADE Heavy-Duty		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
4-IN-1™	• Quadruplex Receptacle • Side Wire Only	White	1254-HW	21254-HW	
		Ivory	1254-HI	21254-HI	
		Brown	1254-H	21254-H	
		Gray	—	21254-HGY	
		Red	1254-HR	21254-HR	
	• Quadruplex Receptacle • Isolated Ground • Side Wire Only 	White	—	21254-IGW	
		Ivory	—	21254-IGI	
		Orange	1254-IG	21254-IG	
	• Quadruplex Receptacle • Surge Protective • Indicator Light • Side Wire Only 	White	8480-W	8490-W	
		Ivory	8480-I	8490-I	
		Red	8480-R	8490-R	
	• Quadruplex Receptacle • Surge Protective • Isolated Ground • Indicator Light • Side Wire Only  	White	8480-IGW	—	
		Ivory	8480-IGI	8490-IGI	
		Orange	—	8490-IG	
		Blue	8480-IGB	8490-IGB	

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty		NEMA 5-15R		NEMA 5-20R	
2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp	
4-IN-1™	• Quadruplex Receptacle • Side Wire Only	White	1254-W	21254-W	
		Ivory	1254-I	21254-I	
		Brown	1254	21254	
		Gray	1254-GY	21254-GY	
		Black	1254-E	21254-E	
		Red	1254-R	21254-R	
		Yellow	—	21254-Y	
	• Quadruplex Receptacle • Surge Protective • Indicator Light • Side Wire Only 	White	5480-W	5490-W	
		Ivory	5480-I	5490-I	
		Gray	5480-GY	5490-GY	
		Red	5480-R	—	
		Blue	5480-BU	5490-BU	
	• Quadruplex Receptacle • Surge Protective • Isolated Ground • Indicator Light • Side Wire Only  	Ivory	—	5490-IGI	
		Orange	5480-IG	5490-IG	
		Blue	—	5490-IGB	



21254-HI (Front)



21254-HI (Back)



21254-W (Front)

Combination Straight & Locking Blade Receptacles

INDUSTRIAL SPECIFICATION GRADE Heavy-Duty



2-Pole, 3-Wire • 125 Volt		Feed	Color	15 Amp
COMBO	• Duplex Receptacle	Common Feed	Black	4792
	• Smooth Face	2 Hot, 1 Neutral Return	Black	4794-1R
	• Back and Side Wire	2 Hot, 2 Neutral Returns	Black	4795-2R



Clock Hanger & Display Receptacles

COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
CLOCK-HANGER	• Recessed Single Receptacle with Hook on Wallplate	White	T5015-CHW	T5020-CHW
	• Smooth Face	Ivory	T5015-CHI	T5020-CHI
	• Tamper-Resistant	Stainless Steel	T5261-CH	T5361-CH
	• Back and Side Wire			
DISPLAY	• Recessed Single Receptacle with Wallplate Featuring Removable Receptacle Cover	Brass	T5250-B	T5350-B
	• Smooth Face			
	• Tamper-Resistant			
	• Back and Side Wire			



Universal (Europlug)

COMMERCIAL SPECIFICATION GRADE



2-Pole, 3-Wire • 125/250 Volt		Color	15 Amp	16 Amp
DECORA PLUS™	• Straight Blade and Europlug Duplex Receptacle	White	5825-W	5835-W
	• Smooth Face	Ivory	5825-I	5835-I
	• Back and Side Wire	Lt Almond	5825-T	5835-T
		Black	5825-E	5835-E



Short Strap Receptacles

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
SHORT STRAP	- Single Receptacle - Smooth Face - Side Wire Only 	Black	—	5558-SS
	- Single Receptacle - Tapped Mounting Holes - Smooth Face - Side Wire Only 	Black	5258-SS	—
	- Mounted to Round 4" Cover - Smooth Face - Side Wire Only	Black	5059 (Single)	—
		Black	5042 (Duplex)	—
4" CVR.				

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 250 Volt		Color	15 Amp	20 Amp
SH. STRAP	- Single Receptacle - Smooth Face - Side Wire Only 	Black	5658-SS	5458-SS




5558-SS




5059

Wallplates: Quick Reference Guide

NYLON WALLPLATES

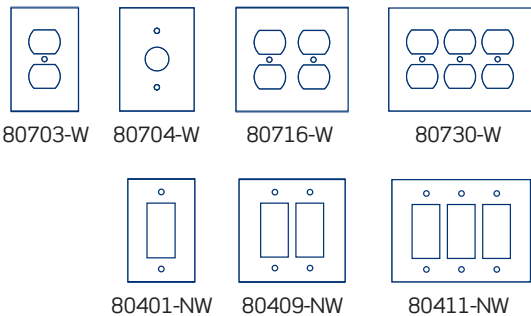

302 STAINLESS STEEL WALLPLATES

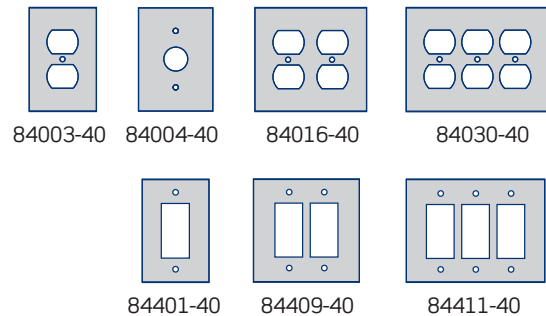

What appears above is only a small sampling of the wallplate options available from Leviton. For a far more comprehensive listing, please visit our website at leviton.com/wallplates.



Weatherproof Device Covers

The Leviton offering of Weatherproof Covers & Boxes comprises both 1- and 2-gang configurations that comply with the National Electric Code® (2017) Section 406.9 for weatherproof enclosures in damp and wet locations.

To explore our complete line of boxes, hoods and covers, visit: leviton.com/weatherproofcovers



Leviton Manufacturing Co., Inc.

201 N Service Rd, Melville, NY 11747

Telephone: 1-800-323-8920 • Tech Line: 1-800-824-3005 (M-F 8AM-10PM EST, Sat 9AM-7PM EST)

Visit our Website at: leviton.com/receptaclegrades **email:** commercial@leviton.com

© 2026 Leviton Manufacturing Co., Inc. All rights reserved. Specifications subject to change without notice.

Q-1101K

SCAN TO EXPLORE ALL
PRODUCT DETAILS &
VIDEOS

