

Commercial & Industrial Straight Blade Receptacles

Specification and Hospital Grades

Straight Blade Receptacles Overview

CODE COMPLIANT SOLUTIONS

TAMPER-RESISTANT RECEPTACLES

Safety shutters prevent unintended contact with live parts as specified by the National Electrical Code®.



ISOLATED GROUND RECEPTACLES

Provides a more reliable, noise-free equipment ground path to sensitive electrical equipment.



POWER INDICATION RECEPTACLES

Provides visual indication of power present at the receptacle; ideal for emergency circuit applications.



WEATHER-RESISTANT RECEPTACLES

Designed for wet or damp locations, these receptacles provide added protection against corrosion, UV degradation, and cold impact damage.



SURGE PROTECTIVE RECEPTACLES

Provides point-of-use surge protection for sensitive electronic devices, such as monitors, projectors, computers, etc.



MARKED "CONTROLLED" RECEPTACLES

The National Electrical Code requires all 15 A and 20 A, 125 V receptacles that are automatically controlled to be marked with a specific symbol ⏻ and the word "CONTROLLED" on the receptacle.



HOSPITAL GRADE RECEPTACLES

In addition to UL Listing requirements for general use receptacles, hospital grade receptacles incorporate additional construction features and are subjected to more stringent performance requirements.




SMARTLOCKPRO® GFCI RECEPTACLES

By cutting off power if a ground-fault is detected, these receptacles are engineered to help protect people from the hazards of electric shock and electrocution.



SMARTLOCKPRO® AFCI RECEPTACLES

By detecting hazardous arc-faults and responding by interrupting power, these receptacles help reduce the likelihood of electrical fires.

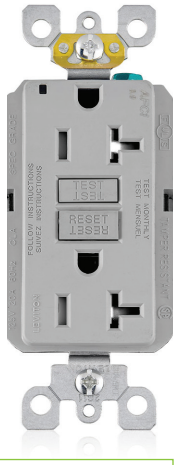


Leviton uses several Nationally Recognized Testing Labs (NRTLs) for certification of receptacles. UL and CSA are two of these NRTLs. When you see the UL and CSA symbols, you can have the confidence that the devices adhere to strict scientific safety, quality or security standards.

In addition to complying with UL general use requirements, when you see the FULS marking you are assured that the receptacle has been investigated for compliance with US Federal Specification W-C-596 for the purpose of more durability and service life.

Commercial & Industrial Straight Blade Receptacles

Specification and Hospital Grades

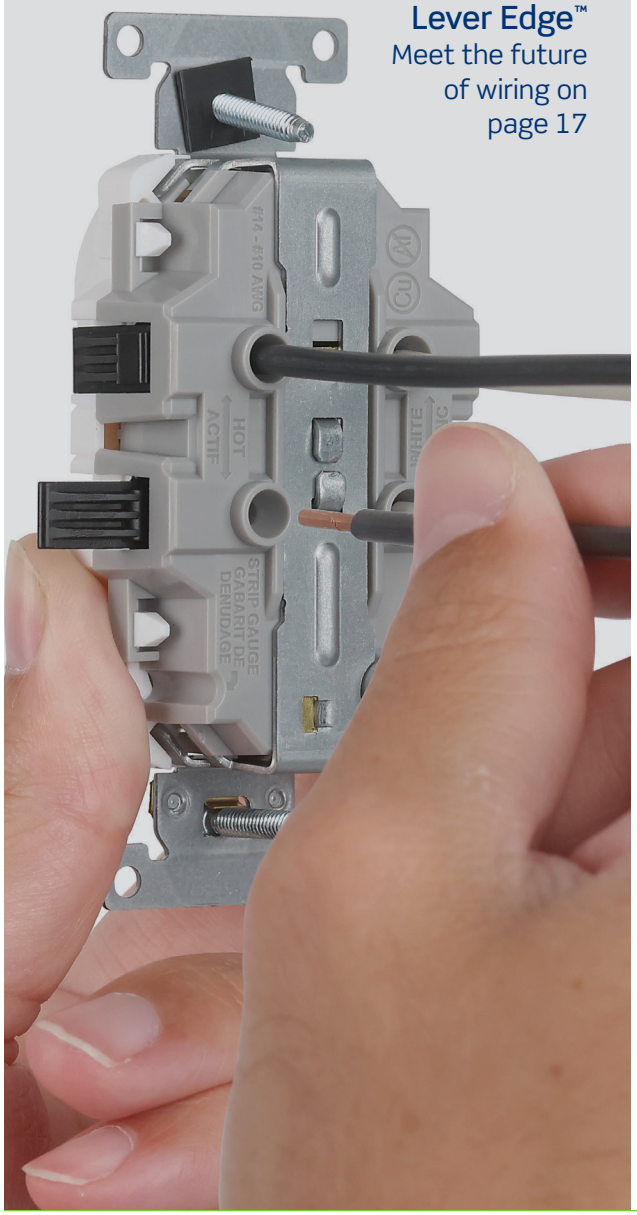

Lever Edge™
Meet the future of wiring on page 17

TABLE OF CONTENTS

Overview 2

Standard Receptacles 6

Time Savings 16
- Lever Edge™ Fast Wiring Receptacles 17
- Lev-lok® Modular Wiring Receptacles 18
- Receptacles with Pre-Wired Leads 29

Protection 31
- SmartlockPro® AFCI Receptacles 31
- SmartlockPro® GFCI Receptacles 32
- SmartlockPro® Dual Function AFCI/GFCI Receptacles. 36
- Surge Protective Receptacles 37

Plug Load Control 38
- Marked "Controlled" Receptacles 38

Specialty 43
- USB Receptacles 43
- 4-in-1™ Receptacles 45
- Combination Straight & Locking Receptacles 46
- Clock Hanger & Display Receptacles 46
- Europlug/Universal Receptacles 46
- Short Strap Receptacles 47

Accessories: Wallplates & Weatherproof Covers . . 48

Choose from among the broadest offering of safe and reliable receptacle outlets in the industry, with devices to suit your every need or function.

SYMBOLS TO SIMPLIFY BROWSING

Tamper-Resistant · Isolated Ground · Power Indication · Weather-Resistant · Corrosion-Resistant · Audible Alarm · Single Receptacle · Plug Load Control · Fast-Charging USB


A receptacle for every application

HOSPITAL GRADE

UL construction and performance requirements for Hospital Grade receptacles are more stringent than those for specification grade devices. Leviton Hospital Grade receptacles meet or exceed these requirements. These receptacles are Fed Spec W-C-596 rated.*



Extra Heavy-Duty

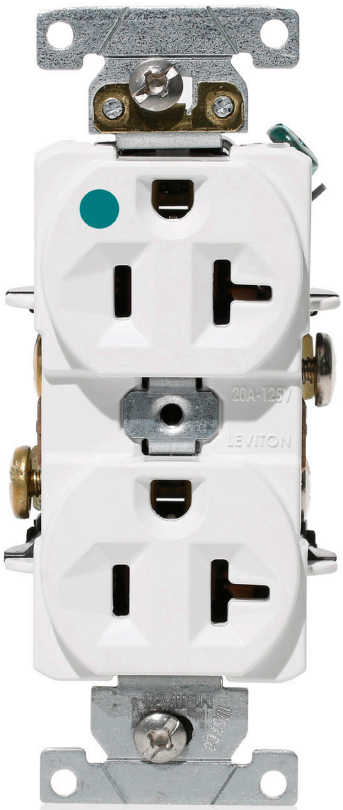


Heavy-Duty

INDUSTRIAL SPECIFICATION GRADE

For demanding applications requiring robust construction and exceptional electrical performance, Leviton industrial specification grade receptacles are the ideal solution. These receptacles are Fed Spec W-C-596 rated.*



Extra Heavy-Duty

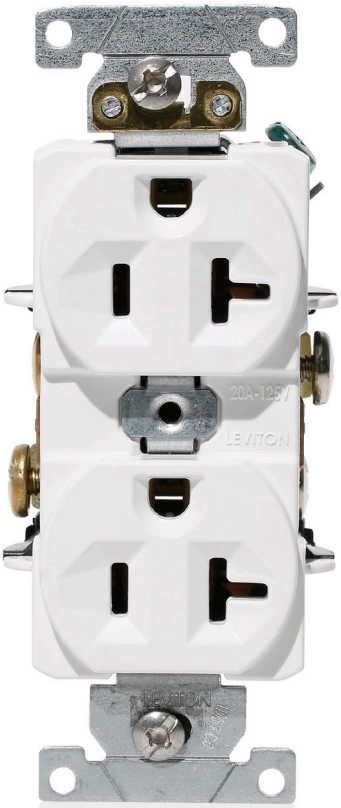


Heavy-Duty

* See website for product specifications.

COMMERCIAL SPECIFICATION GRADE

The perfect balance between performance and value, these heavy-duty receptacles are the most widely specified for commercial building projects. Most Leviton non-tamper-resistant commercial receptacles are Fed Spec W-C-596 rated.*

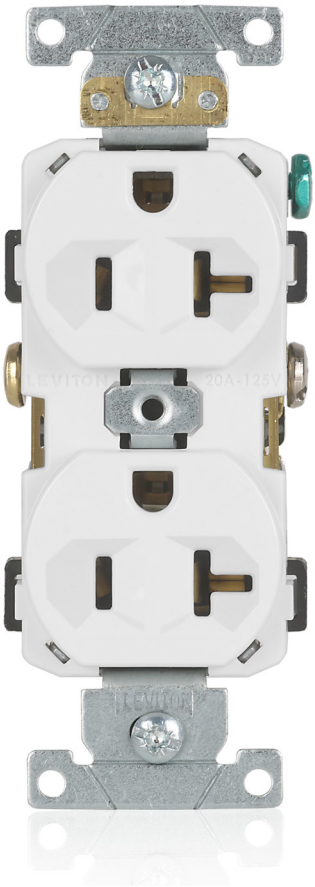


HOSPITAL GRADE
Extra Heavy-Duty

- Single-piece wraparound nickel-plated brass strap
- Integral ground contacts
- Extra heavy-duty high-performance brass electrical contacts



HOSPITAL GRADE & INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

- Single-piece heavy-duty wraparound galvanized steel strap
- Brass ground contacts
- Heavy-duty copper alloy electrical contacts

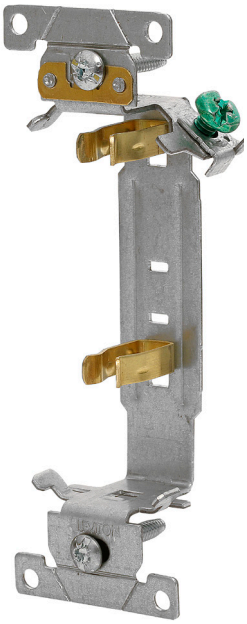

COMMERCIAL SPECIFICATION GRADE

- Single-piece wraparound galvanized steel strap
- Brass ground contacts
- Heavy-duty copper alloy electrical contacts



* See website for product specifications.

* FULS applies to Non-Tamper-Resistant only.

Standard Receptacles

HOSPITAL GRADE
Extra Heavy-Duty

	2-Pole, 3-Wire • 125 Volt		Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Back and Side Wire		White	8200-W	8300-W
			Ivory	8200-I	8300-I
			Lt Almond	8200-T	8300-T
			Brown	8200	8300
			Gray	8200-GY	8300-GY
			Black	—	8300-E
			Red	8200-R	8300-R
			Blue	8200-BU	8300-BU
	• Duplex Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire	TR	White	8200-SGW	8300-SGW
			Ivory	8200-SGI	8300-SGI
			Lt Almond	—	8300-SGT
			Brown	8200-SG	8300-SG
			Gray	8200-SGG	8300-SGG
			Red	8200-SGR	8300-SGR
	• Duplex Receptacle • Smooth Face • Power Indication LED • Back and Side Wire		White	8200-PLW	8300-PLW
			Ivory	8200-PLI	8300-PLI
			Brown	—	8300-PL
			Gray	—	8300-PLG
			Red	8200-PLR	8300-PLR
			Orange	—	8300-PLO
	• Duplex Receptacle • Smooth Face • MRI • Back and Side Wire		White	MRI82-W	MRI83-W
			Ivory	MRI82-I	MRI83-I
			Lt Almond	MRI82-T	MRI83-T
			Gray	MRI82-GY	MRI83-GY
			Red	MRI82-R	MRI83-R
DECORA PLUS™	• Duplex Receptacle • Smooth Face • Back and Side Wire		White	16262-HGW*	16362-HGW*
			Ivory	16262-HGI*	16362-HGI*
			Lt Almond	—	16362-HGT*
			Gray	16262-HGG*	16362-HGG*
			Red	16262-HGR*	16362-HGR*
	• Duplex Receptacle • Smooth Face • Power Indication LED • Back and Side Wire		White	16262-PLW*	16362-PLW*
			Ivory	16262-PLI*	16362-PLI*
			Red	16262-PLR*	16362-PLR*
	• Duplex Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire	TR	White	16262-SGW*	16362-SGW*
			Ivory	16262-SGI*	16362-SGI*
			Lt Almond	16262-SGT*	16362-SGT*
			Brown	16262-SG*	—
			Gray	—	16362-SGG*
			Red	16262-SGR*	16362-SGR*

* Not Fed Spec rated


8300-PLW



8200-SGG


16262-SGR

HOSPITAL GRADE
Extra Heavy-Duty

250 V

2-Pole, 3-Wire • 250 Volt	Color	NEMA 6-15R 15 Amp	NEMA 6-20R 20 Amp
STANDARD • Duplex Receptacle • Smooth Face • Back and Side Wire	White	—	8400-W
	Ivory	8600-I	8400-I
	Brown	8600	8400
	Gray	—	8400-GY
	Red	—	8400-R

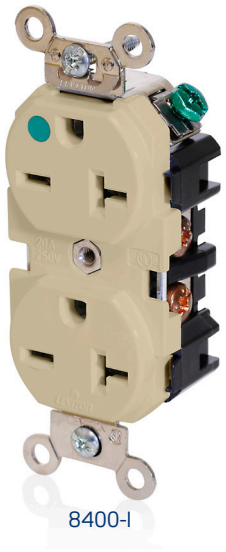
8400-I

HOSPITAL GRADE
Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD • Single Receptacle • Smooth Face • Back and Side Wire	White	8210-W	8310-W
	Ivory	8210-I	8310-I
	Brown	8210	8310
	Gray	—	8310-GY
	Red	8210-R	8310-R
• Duplex Receptacle • Smooth Face • Back and Side Wire	White	8200-HW	8300-HW
	Ivory	8200-HI	8300-HI
	Lt Almond	8200-HT	8300-HT
	Brown	8200-H	8300-H
	Gray	8200-HGY	8300-HGY
	Red	8200-HR	8300-HR
	Yellow	8200-HY	—
	Blue	8200-HBU	8300-HBU
• Duplex Receptacle • Indented Face • Back and Side Wire	White	C8200-W	C8300-W
	Ivory	C8200-I	C8300-I
	Lt Almond	C8200-T	C8300-T
	Brown	C8200	C8300
	Gray	C8200-GY	C8300-GY
	Black	C8200-E	C8300-E
	Red	C8200-R	C8300-R
	Blue	C8200-BU	C8300-BU
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire	White	T8200-W	T8300-W
	Ivory	T8200-I	T8300-I
	Lt Almond	T8200-T	T8300-T
	Brown	T8200	T8300
	Gray	T8200-GY	T8300-GY
	Black	T8200-E	T8300-E
	Red	T8200-R	T8300-R
	Blue	T8200-BU	T8300-BU
• Single Receptacle • Smooth Face • Isolated Ground • Back and Side Wire	Orange	8210-IG	8310-OIG
• Duplex Receptacle • Smooth Face • Isolated Ground • Back and Side Wire	White	8200-IGW	8300-IGW
	Ivory	8200-IGI	8300-IGI
	Brown	8200-IGB	8300-IGB
	Gray	8200-IGG	8300-IGG
	Red	8200-IGR	8300-IGR
	Orange	8200-IG	8300-OIG


C8200-W



T8200-I

Standard Receptacles

HOSPITAL GRADE
Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD			
• Duplex Receptacle • Smooth Face • Isolated Ground • Back and Side Wire • Pre-wired Ground Lead	Orange	8200-LIG	8300-LIG
• Duplex Receptacle • Smooth Face • Illuminated Blade Slot • Back and Side Wire	White	8200-HLW	8300-HLW
	Ivory	8200-HLI	8300-HLI
	Gray	—	8300-HLG
	Red	8200-HLR	8300-HLR
• Duplex Receptacle • Smooth Face • Isolated Ground • Tamper-Resistant • Back and Side Wire	White	T8200-IGW	T8300-IGW
	Ivory	T8200-IGI	T8300-IGI
	Gray	T8200-IGG	T8300-IGG
	Red	T8200-IGR	T8300-IGR
	Orange	T8200-IG	T8300-IG
	Blue	T8200-IGB	T8300-IGB
DECORA PLUS™			
• Duplex Receptacle • Smooth Face • Isolated Ground • Back and Side Wire	White	D8200-IGW	D8300-IGW
	Ivory	D8200-IGI	D8300-IGI
	Lt Almond	D8200-IGT	D8300-IGT
	Brown	D8200-IGB	D8300-IGB
	Gray	D8200-IGG	D8300-IGG
	Black	D8200-IGE	D8300-IGE
	Red	D8200-IGR	D8300-IGR
	Orange	D8200-IG	D8300-IG
• Duplex Receptacle • Smooth Face • Isolated Ground • Tamper-Resistant • Back and Side Wire	White	DT820-IGW	DT830-IGW
	Ivory	DT820-IGI	DT830-IGI
	Brown	DT820-IGB	DT830-IGB
	Gray	DT820-IGG	DT830-IGG
	Red	DT820-IGR	DT830-IGR
	Orange	DT820-IG	DT830-IG


T8300-IGW

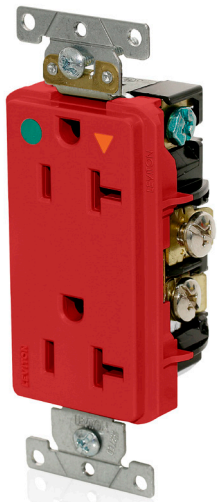
D8300-IGR

INDUSTRIAL SPECIFICATION GRADE
Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD			
• Duplex Receptacle • Smooth Face • Back and Side Wire	White	5262-W	5362-W
	Ivory	5262-I	5362-I
	Brown	5262	5362
	Gray	5262-GY	5362-GY
	Black	5262-E	5362-E
	Red	5262-R	5362-R
	Blue	—	5362-BU
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire	White	5262-SGW	5362-SGW
	Ivory	5262-SGI	5362-SGI
	Lt Almond	5262-SGT	5362-SGT
	Brown	5262-SG	5362-SG
	Gray	5262-SGG	5362-SGG
	Black	5262-SGE	5362-SGE
	Red	5262-SGR	5362-SGR
	Blue	5262-SGB	5362-SGB


5362-W

INDUSTRIAL SPECIFICATION GRADE
Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STDRD • Duplex Receptacle • Corroson-Resistant • Smooth Face • Back and Side Wire (CR)	Yellow	52CM-62	53CM-62

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD • Single Receptacle • Smooth Face • Side Wire Only	Ivory	5251-I	5351-I
	Brown	5251	5351
• Single Receptacle • Smooth Face • Back and Side Wire	White	5261-W	5361-W
	Ivory	5261-I	5361-I
	Lt Almond	—	5361-T
	Brown	5261	5361
	Gray	5261-GY	5361-GY
	Black	5261-E	5361-E
	Red	5261-R	5361-R
• Duplex Receptacle • Smooth Face • Side Wire Only	White	5242-W	5342-W
	Ivory	5242-I	5342-I
	Brown	5242	5342
	Gray	5242-GY	5342-GY
	Black	—	5342-E
	Red	5242-R	5342-R
• Duplex Receptacle • Smooth Face • Back and Side Wire	White	5252-W	5352-W
	Ivory	5252-I	5352-I
	Lt Almond	5252-T	5352-T
	Brown	5252	5352
	Gray	5252-GY	5352-GY
	Black	5252-E	5352-E
	Red	5252-R	5352-R
	Blue	5252-BU	5352-BU
• Duplex Receptacle • Smooth Face • Back and Side Wire	White	5262-SW	5362-SW
	Ivory	5262-SI	5362-SI
	Lt Almond	5262-ST	5362-ST
	Brown	5262-S	5362-S
	Gray	5262-GYS	5362-GYS
	Black	5262-SE	5362-SE
	Red	5262-SR	5362-SR
	Orange	—	5362-SO
	Green	—	5362-GNS
	Blue	5262-SBU	5362-SBU
• Duplex Receptacle • Indented Face • Back and Side Wire	White	C5262-W	C5362-W
	Ivory	C5262-I	C5362-I
	Lt Almond	C5262-T	C5362-T
	Brown	C5262	C5362
	Gray	C5262-GY	C5362-GY
	Black	C5262-E	C5362-E
	Red	C5262-R	C5362-R
	Blue	C5262-BU	C5362-BU


5362-SGW


5352-GY


5361-W

Standard Receptacles

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

STANDARD

2-Pole, 3-Wire • 125 Volt	Color	15 Amp (NEMA 5-15R)	20 Amp (NEMA 5-20R)
• Duplex Receptacle • Indented Face • Back and Side Wire • Single Piece Ground Shunt	White	L5262-W	L5362-W
	Ivory	L5262-I	L5362-I
	Lt Almond	L5262-T	L5362-T
	Brown	L5262	L5362
	Gray	L5262-GY	L5362-GY
	Black	L5262-E	L5362-E
	Red	L5262-R	L5362-R
	Blue	L5262-BU	L5362-BU
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire	White	T5262-W	T5362-W
	Ivory	T5262-I	T5362-I
	Lt Almond	T5262-T	T5362-T
	Brown	T5262	T5362
	Gray	T5262-GY	T5362-GY
	Black	T5262-E	T5362-E
TR	Red	T5262-R	T5362-R
	Blue	T5262-BU	T5362-BU
• Single Receptacle • Smooth Face • Corroson-Resistant • Back and Side Wire	Yellow	5261-CR	5361-CR
CR			
• Single Receptacle • Smooth Face • Isolated Ground • Back and Side Wire	Orange	5261-IG	5361-IG
• Duplex Receptacle • Smooth Face • Isolated Ground • Back and Side Wire	White	5262-IGW	5362-IGW
	Ivory	5262-IGI	5362-IGI
	Lt Almond	—	5362-IGT
	Brown	5262-IGB	5362-IGB
	Gray	5262-IGG	5362-IGG
	Black	5262-IGE	5362-IGE
	Red	5262-IGR	5362-IGR
	Orange	5262-IG	5362-IG
	Blue	—	5362-BIG
• Single Receptacle • Smooth Face • Weather-Resistant • Back and Side Wire	White	W5261-W	W5361-W
	Ivory	W5261-I	W5361-I
	Lt Almond	W5261-T	W5361-T
	Brown	W5261	W5361
	Gray	W5261-GY	W5361-GY
	Black	W5261-E	W5361-E
	Red	W5261-R	W5361-R
	Yellow	W5261-Y	W5361-Y
• Duplex Receptacle • Indented Face • Weather-Resistant • Back and Side Wire	White	WBR15-W	WBR20-W
	Ivory	—	WBR20-I
	Gray	—	WBR20-GY
	Black	—	WBR20-E
	Red	—	WBR20-R
	Yellow	WBR15-Y	WBR20-Y
	Blue	—	WBR20-BU


L5362-I


5361-CR



W5361-W

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Isolated Ground • Tamper-Resistant • Back and Side Wire	White	T5262-IGW	T5362-IGW
		Ivory	T5262-IGI	T5362-IGI
		Gray	T5262-IGG	T5362-IGG
		Red	T5262-IGR	T5362-IGR
		Orange	T5262-IG	T5362-IG
		Blue	T5262-IGB	T5362-IGB
	• Duplex Receptacle • Smooth Face • Weather-Resistant • Tamper-Resistant • Back and Side Wire	White	TWR15-W	TWR20-W
		Ivory	—	TWR20-I
		Gray	TWR15-GY	TWR20-GY
		Yellow	—	TWR20-Y
DECORA PLUS™	• Duplex Receptacle • Smooth Face • Back and Side Wire	White	16262-W*	16362-W*
		Ivory	16262-I*	16362-I*
		Brown	16262*	16362*
		Gray	16262-GY*	16362-GY*
		Black	16262-E*	16362-E*
	• Duplex Receptacle • Smooth Face • Side Wire Only	White	16242-W	16342-W
		Ivory	16242-I	16342-I
		Lt Almond	—	16342-T
		Brown	16242	16342
		Gray	—	16342-GY
		Black	16242-E	16342-E
	• Duplex Receptacle • Smooth Face • Back and Side Wire	White	16252-W	16352-W
		Ivory	16252-I	16352-I
		Lt Almond	16252-T	16352-T
		Brown	16252	16352
		Gray	16252-GY	16352-GY
		Black	16252-E	16352-E
		Red	16252-R	16352-R
		Blue	16252-BU	16352-BU
	• Single Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire	White	—	16351-SGW
	• Duplex Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire	White	TDR15-W	TDR20-W
		Ivory	TDR15-I	TDR20-I
		Lt Almond	TDR15-T	TDR20-T
		Brown	TDR15	TDR20
		Gray	TDR15-GY	TDR20-GY
		Black	TDR15-E	TDR20-E
		Red	TDR15-R	—
		Blue	TDR15-BU	—

* Not Fed Spec rated



WBR20-Y


T5362-IGW



TWR20-I

Standard Receptacles

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

2-Pole, 3-Wire • 125 Volt

DECORA PLUS™

	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Smooth Face • Isolated Ground • Back and Side Wire	White	16262-WIG	16362-WIG
	Ivory	16262-IIG	16362-IIG
	Lt Almond	16262-TIG	16362-TIG
	Gray	16262-GIG	16362-GIG
	Black	16262-EIG	16362-EIG
	Red	16262-RIG	16362-RIG
	Orange	16262-OIG	16362-OIG
	Blue	16262-BIG	16362-BIG
• Duplex Receptacle • Smooth Face • Weather-Resistant • Back and Side Wire	White	WDR15-W	WDR20-W
	Ivory	WDR15-I	WDR20-I
	Brown	WDR15	WDR20
	Gray	WDR15-GY	WDR20-GY
	Black	WDR15-E	WDR20-E
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Weather-Resistant • Back and Side Wire	White	WTD15-W	WTD20-W
	Gray	WTD15-GY	WTD20-GY
	Black	WTD15-E	WTD20-E
• Duplex Receptacle • Smooth Face • Isolated Ground • Tamper-Resistant • Back and Side Wire	White	T1626-IGW	T1636-IGW
	Ivory	T1626-IGI	T1636-IGI
	Gray	T1626-IGG	T1636-IGG
	Red	T1626-IGR	T1636-IGR
	Orange	T1626-IG	T1636-IG
	Blue	T1626-IGB	T1636-IGB

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

COMBO

2-Pole, 3-Wire • 125 and 250 Volt

STD.

	Color	NEMA 5-15R 15 Amp	NEMA 6-15R 15 Amp
• Duplex Receptacle • Smooth Face • Side Wire Only	Ivory	5292-I	
	Brown	5292	

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

250 V

2-Pole, 3-Wire • 250 Volt

STANDARD

	Color	NEMA 6-15R 15 Amp	NEMA 6-20R 20 Amp
• Single Receptacle • Smooth Face • Side Wire Only	White	5651-W	—
	Ivory	5651-I	—
	Brown	5651	—
• Single Receptacle • Smooth Face • Back and Side Wire	White	5661-W	5461-W
	Ivory	5661-I	5461-I
	Lt Almond	—	5461-T
	Brown	5661	5461
	Gray	—	5461-GY
	Black	5661-E	—
	Red	—	5461-R
• Duplex Receptacle • Smooth Face • Back and Side Wire	White	—	5462-W
	Ivory	5662-I	5462-I
	Brown	5662	5462
	Gray	—	5462-GY



WDR20-W


T1636-IGG


5292-I

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

250 V

2-Pole, 3-Wire • 250 Volt	Color	15 Amp (NEMA 6-15R)	20 Amp (NEMA 6-20R)
STANDARD			
• Single Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire	White	T5661-W	T5461-W
	Ivory	T5661-I	T5461-I
	Lt Almond	T5661-T	T5461-T
	Brown	T5661	T5461
	Gray	T5661-GY	T5461-GY
	Black	T5661-E	T5461-E
• Single Receptacle • Smooth Face • Isolated Ground • Back and Side Wire • Pre-wired Ground Lead	Orange	5661-IG	5461-IG
• Duplex Receptacle • Smooth Face • Isolated Ground • Back and Side Wire	Orange	5662-IG	5462-IG
• Single Receptacle • Smooth Face • Corrosion-Resistant • Back and Side Wire	Yellow	5661-CR	5461-CR
• Single Receptacle • Smooth Face • Weather-Resistant • Back and Side Wire	White	W5661-W	W5461-W
	Ivory	W5661-I	W5461-I
	Lt Almond	W5661-T	W5461-T
	Brown	W5661	W5461
	Gray	W5661-GY	W5461-GY
	Black	W5661-E	W5461-E
	Yellow	W5661-Y	W5461-Y
• Single Receptacle • Smooth Face • Weather- and Tamper-Resistant • Back and Side Wire	White	W5661-T0W	W5461-T0W
	Ivory	W5661-T0I	W5461-T0I
	Lt Almond	W5661-T0T	W5461-T0T
	Brown	W5661-T00	W5461-T00
	Gray	W5661-TGY	W5461-TGY
	Black	W5661-T0E	W5461-T0E
	Yellow	W5661-T0Y	W5461-T0Y



W5461-W


5662-IG

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt	Color	15 Amp (NEMA 5-15R)	20 Amp (NEMA 5-20R)
STANDARD			
• Single Receptacle • Indented Face • Side Wire Only	White	5015-W	5801-W
	Ivory	5015-I	5801-I
	Lt Almond	5015-T	5801-T
	Brown	5015	5801
• Single Receptacle • Indented Face • Back and Side Wire	White	—	5891-W
	Ivory	5088-I	—
	Lt Almond	5088-T	—
	Brown	5088	5891


5801-W

Standard Receptacles

COMMERCIAL SPECIFICATION GRADE

	2-Pole, 3-Wire • 125 Volt		Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Side Wire Only		White	CR015-W	CR020-W
			Ivory	CR015-I	CR020-I
			Lt Almond	CR015-T	CR020-T
			Brown	CR015	CR020
			Gray	CR015-GY	CR020-GY
			Black	CR015-E	CR020-E
			Red	CR015-R	CR020-R
			Orange	CR015-O	CR020-O
			Green	CR015-N	CR020-N
			Blue	CR015-B	CR020-B
	• Duplex Receptacle • Indented Face • Side Wire Only		White	CR15-W	CR20-W
			Ivory	CR15-I	CR20-I
			Lt Almond	CR15-T	CR20-T
			Brown	CR15	CR20
			Gray	CR15-GY	CR20-GY
			Black	CR15-E	CR20-E
	• Duplex Receptacle • Indented Face • Back and Side Wire		White	BR15-W	BR20-W
			Ivory	BR15-I	BR20-I
			Lt Almond	BR15-T	BR20-T
			Brown	BR15	BR20
			Gray	BR15-GY	BR20-GY
			Black	BR15-E	BR20-E
			Red	BR15-R	BR20-R
			Orange	BR15-O	BR20-O
			Green	BR15-N	BR20-N
			Blue	BR15-B	BR20-B
	• Single Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire • Grounding	TR	White	T5015-W	T5020-W
			Ivory	T5015-I	T5020-I
			Lt Almond	T5015-T	T5020-T
			Brown	T5015	T5020
			Gray	T5015-GY	T5020-GY
			Black	T5015-E	T5020-E
	• Duplex Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire	TR	White	TBR15-W	TBR20-W
			Ivory	TBR15-I	TBR20-I
			Lt Almond	TBR15-T	TBR20-T
			Brown	TBR15	TBR20
			Gray	TBR15-GY	TBR20-GY
			Black	TBR15-E	TBR20-E
	• Duplex Receptacle • Smooth Face • Tamper-Resistant • Side Wire Only	TR	White	TCR15-W	TCR20-W
			Ivory	TCR15-I	TCR20-I
			Lt Almond	TCR15-T	TCR20-T
			Brown	TCR15	TCR20
			Gray	TCR15-GY	TCR20-GY
			Black	TCR15-E	TCR20-E
DECORA PLUS™	• Single Receptacle • Smooth Face • Back and Side Wire		White	16251-W	16351-W
			Ivory	16251-I	16351-I
			Brown	16251	16351



CR020-GY



BR20-W



16351-I

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™ • Duplex Receptacle • Smooth Face • Tamper-Resistant • Side Wire Only (TR)	White	DTC15-W	DTC20-W
	Ivory	DTC15-I	DTC20-I
	Lt Almond	DTC15-T	DTC20-T
	Brown	DTC15	DTC20
	Gray	DTC15-GY	DTC20-GY
	Black	DTC15-E	DTC20-E
	Red	DTC15-R	DTC20-R
	Orange	DTC15-O	DTC20-O
	Green	DTC15-N	DTC20-N
	Blue	DTC15-B	DTC20-B
DECORA PLUS™ • Duplex Receptacle • Smooth Face • Side Wire Only	White	DCR15-W	DCR20-W
	Ivory	DCR15-I	DCR20-I
	Lt Almond	DCR15-T	DCR20-T
	Brown	DCR15	DCR20
	Gray	DCR15-GY	DCR20-GY
	Black	DCR15-E	DCR20-E
	Red	DCR15-R	DCR20-R
	Orange	DCR15-O	DCR20-O
	Green	DCR15-G	DCR20-G
	Blue	DCR15-R	DCR20-R
• Single Receptacle • Smooth Face • Side Wire Only	White	16241-W	16341-W
	Ivory	16241-I	16341-I
	Lt Almond	—	16341-T
	Brown	—	16341
	Gray	—	16341-GY
	Black	—	16341-E
• Single Receptacle • Smooth Face • Tamper-Resistant • Back and Side Wire (TR)	White	—	16351-SGW



16292-W

COMMERCIAL SPECIFICATION GRADE

125/250 V

2-Pole, 3-Wire • 125/250 Volt	Color	NEMA 10-20R 20 Amp
STD. • Single Receptacle • Smooth Face • Side Wire Only	Ivory	5032-I
	Black	5032




5032

COMMERCIAL SPECIFICATION GRADE

COMBO

2-Pole, 3-Wire • 125 and 250 Volt	Color	NEMA 5-15R / NEMA 6-15R 15 Amp
STD. • Duplex Receptacle • Indented Face • Side Wire Only	White	5031-W
	Ivory	5031-I
	Brown	5031
DECORA PLUS™ • Duplex Receptacle • Smooth Face • Back and Side Wire	White	16292-W
	Ivory	16292-I

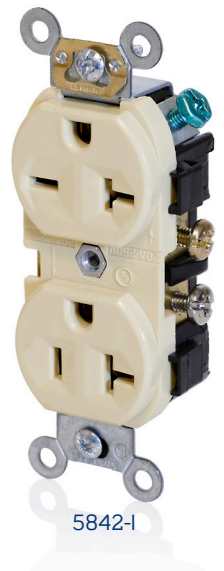

5842-I

Standard Receptacles

COMMERCIAL SPECIFICATION GRADE — COMBO

2-Pole, 3-Wire • 125 and 250 Volt		Color	NEMA 5-20R 20 Amp	NEMA 6-20R 20 Amp
STANDARD	• Duplex Receptacle • Indented Face • Side Wire Only	Ivory	5842-I	
		Brown	5842	
	• Duplex Receptacle • Indented Face • Back and Side Wire	Ivory	5844-I	
		Brown	5844	

COMMERCIAL SPECIFICATION GRADE — 125/250 V

3-Pole, 4-Wire • 125/250 Volt		Color	NEMA 14-20R 20 Amp
STD.	• Single Receptacle • Smooth Face • Back and Side Wire	Black	8410


5821-W

COMMERCIAL SPECIFICATION GRADE — 250 V

2-Pole, 3-Wire • 250 Volt		Color	NEMA 6-15R 15 Amp	NEMA 6-20R 20 Amp
STANDARD	• Duplex Receptacle • Indented Face • Side Wire Only	White	—	5822-W
		Ivory	5028-I	5822-I
		Brown	5028	5822
	• Single Receptacle • Indented Face • Side Wire Only	White	5029-W	5821-W
		Ivory	5029-I	5821-I
		Lt Almond	—	5821-T
		Brown	5029	5821
	• Single Receptacle • Indented Face • Back and Side Wire	Ivory	5089-I	5823-I
		Brown	—	5823
DECORA PLUS™	• Single Receptacle • Smooth Face • Back and Side Wire	White	16651-W	16451-W
		Ivory	16651-I	16451-I
	• Duplex Receptacle • Smooth Face • Back and Side Wire	White	—	16462-W
		Ivory	16662-I	16462-I
		Black	—	16462-E
	• Single Receptacle • Smooth Face • Side Wire Only	White	16641-W	16441-W
		Ivory	16641-I	16441-I
		Lt Almond	—	16441-T


5585

COMMERCIAL SPECIFICATION GRADE — 277 V

2-Pole, 3-Wire • 277 Volt		Color	NEMA 7-15R 15 Amp
STD.	• Duplex Receptacle • Smooth Face • Back and Side Wire	Brown	5585

Lever Edge™ Fast Wiring Receptacles


Meet Lever Edge™ wiring devices, designed for simple installations, time savings, superior performance, and long-lasting reliability. Simply open the lever, push the wire into the color-coded terminals, click down, and you're done.


KEY FEATURES & BENEFITS


- Secure: lever mechanism provides a strong, secure wire connection
- User-friendly design: color-coded lever terminals help prevent miswiring
- Convenient: devices can be unwired/removed and rewired if needed

EXPLORE THE FULL PORTFOLIO
LEVITON.COM/LEVEREDGE

OPEN THE LEVER...







Fast, safe, and easy to install!

COMMERCIAL SPECIFICATION GRADE

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Tamper-Resistant (TR)	White	ET562-W	ET563-W
		Ivory	ET562-I	ET563-I
		Gray	ET562-GY	ET563-GY
		Black	ET562-E	ET563-E
		Red	ET562-R	ET563-R
	• Duplex Receptacle • Indented Face	White	E5262-SW	E5362-SW
		Ivory	E5262-SI	E5362-SI
		Gray	E5262-SG	E5362-SG
		Black	E5262-SE	E5362-SE
		Red	E5262-SR	E5362-SR



E5262-SW

RESIDENTIAL SPECIFICATION GRADE

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA® GFCI	• Duplex Receptacle • **GFCI Protection** • Power Indication LED • Weather & Tamper-Resistant • 20 Amp Feed-Through Terminals (TR)	White	EGFW1-KW	—
	• Duplex Receptacle • **GFCI Protection** • Power Indication LED • Tamper-Resistant • 20 Amp Feed-Through Terminals (TR)	White	EGFT1-W	—
DECORA®	• Duplex Receptacle • Tamper-Resistant • 20 Amp Feed-Through Terminals (TR)	White	E5325-W	—
	• Duplex Receptacle • Tamper-Resistant (TR)	White	—	E5825-W



EGFW1-KW

Lev-lok® Modular Wiring Devices: Receptacles

The perfect productivity solution forelectrical construction & maintenance applications.


KEY FEATURES & BENEFITS

- A simple twist and lock wiring module
- Stranded or solid leads
- Available with and without 4-port push-in wire connectors
- A full portfolio of solutions

EXPLORE THE FULL PORTFOLIO
LEVITON.COM/LEVLOK




How it works...

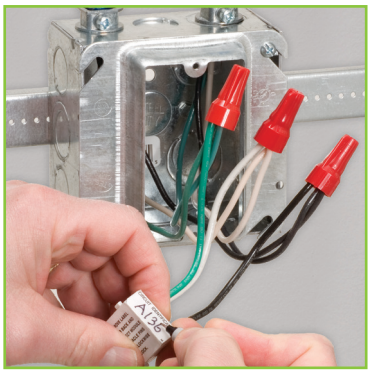

INSTALL WIRING MODULE

All modules have a Circuit ID Label for ease of identification

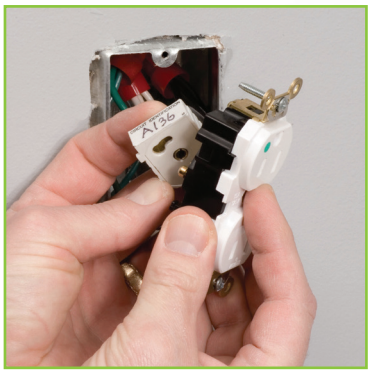

CONNECT WIRING DEVICE

Simply push and twist to lock connection



FINISH INSTALLATION

Install device into box and finish with wallplate

Future Proof

It's 5x faster to replace devices in a facility to meet future needs, whether you're updating technology or meeting new requirements.

Compress Timelines

Accelerate installation and swap outs to complete projects faster than using traditional wiring.


Accurate & Secure Connection

Lev-Lok® lowers the risk of incorrect installation while providing a safe and secure connection.



CALCULATE YOUR SAVINGS ONLINE:
www.leviton.com/levlokcalculator

MSTWL series wiring modules (sold separately) must be used with Lev-Lok receptacles. See page 28 for options and ordering information.

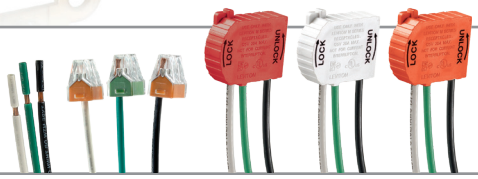

Lev-lok® Modular Wiring Devices: Receptacles


HOSPITAL GRADE
Extra Heavy-Duty

STANDARD


2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Smooth Face • Two Outlets Marked "Controlled"	White	M8200-H2W	M8300-H2W
	Red	M8200-H2R	M8200-H2R
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Two Outlets Marked "Controlled"	White	MT820-2SW	MT830-2SW
	Red	MT820-2SW	MT830-2SW
• Duplex Receptacle • Smooth Face	White	M8200-W	M8300-W
	Ivory	M8200-I	M8300-I
	Lt Almond	M8200-T	M8300-T
	Brown	M8200	M8300
	Gray	M8200-GY	M8300-GY
	Black	M8200-E	M8300-E
	Red	M8200-R	M8300-R
	Blue	M8200-B	M8300-B
• Duplex Receptacle • Smooth Face • Tamper-Resistant	White	M8200-SGW	M8300-SGW
	Ivory	M8200-SGI	M8300-SGI
	Lt Almond	M8200-SGT	M8300-SGT
	Brown	M8200-SG	M8300-SG
	Gray	M8200-SGG	M8300-SGG
	Black	M8200-SGE	M8300-SGE
	Red	M8200-SGR	M8300-SGR
	Blue	M8200-SGB	M8300-SGB
• Duplex Receptacle • Smooth Face • MRI	White	MRI15-W	MRI20-W
	Ivory	MRI15-I	MRI20-I
	Lt Almond	MRI15-T	MRI20-T
	Gray	MRI15-GY	MRI20-GY
	Red	MRI15-R	MRI20-R
• Duplex Receptacle • Smooth Face • Power Indication LED	White	M8200-PLW	M8300-PLW
	Ivory	M8200-PLI	M8300-PLI
	Lt Almond	M8200-PLT	M8300-PLT
	Gray	M8200-PLG	M8300-PLG
	Red	M8200-PLR	M8300-PLR
• Duplex Receptacle • Smooth Face • Illuminated Blade Slot	White	M8200-ILW	M8300-ILW
	Ivory	M8200-ILI	M8300-ILI
	Lt Almond	M8200-ILT	M8300-ILT
	Gray	M8200-ILG	M8300-ILG
	Red	M8200-ILR	M8300-ILR
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Illuminated Blade Slot	White	MT820-ILW	MT830-ILW
	Ivory	MT820-ILI	MT830-ILI
	Lt Almond	MT820-ILT	MT830-ILT
	Gray	MT820-ILG	MT830-ILG
	Red	MT820-ILR	MT830-ILR



M8300-W

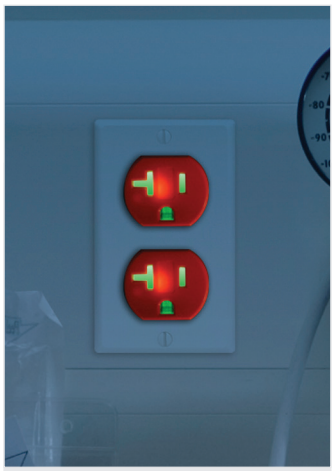

M8300-ILR illuminated in hospital room headwall

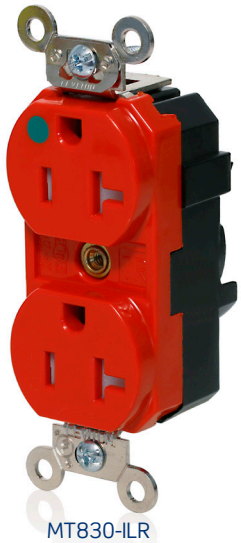

MT830-ILR

Lev-lok® Modular Wiring Devices: Receptacles

HOSPITAL GRADE
Extra Heavy-Duty

DECORA PLUS™

2-Pole, 3-Wire • 125 Volt		Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Smooth Face		White	M1626-HGW	M1636-HGW
		Ivory	M1626-HGI	M1636-HGI
		Lt Almond	M1626-HGT	M1636-HGT
		Gray	M1626-HGG	M1636-HGG
		Black	M1626-HGE	M1636-HGE
		Red	M1626-HGR	M1636-HGR
		Blue	M1626-HGB	M1636-HGB
• Duplex Receptacle • Smooth Face • Tamper-Resistant	TR	White	MT162-HGW	MT163-HGW
	TR	Ivory	MT162-HGI	MT163-HGI
	TR	Lt Almond	—	MT163-HGT
	TR	Gray	MT162-HGG	MT163-HGG
	TR	Red	MT162-HGR	MT163-HGR
• Duplex Receptacle • Smooth Face • Power Indication LED		White	M1626-PLW	M1636-PLW
		Ivory	M1626-PLI	M1636-PLI
		Lt Almond	M1626-PLT	M1636-PLT
		Gray	M1626-PLG	M1636-PLG
		Red	M1626-PLR	M1636-PLR
• Duplex Receptacle • Smooth Face • Illuminated Blade Slot		White	M1626-ILW	M1636-ILW
		Ivory	M1626-ILI	M1636-ILI
		Lt Almond	M1626-ILT	M1636-ILT
		Gray	M1626-ILG	M1636-ILG
		Red	M1626-ILR	M1636-ILR
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Illuminated Blade Slot	TR	White	MT162-ILW	MT163-ILW
	TR	Ivory	MT162-ILI	MT163-ILI
	TR	Lt Almond	MT162-ILT	MT163-ILT
	TR	Gray	MT162-ILG	MT163-ILG
	TR	Red	MT162-ILR	MT163-ILR



M1636-PLW




M1626-HGR

HOSPITAL GRADE
Heavy-Duty

STANDARD

2-Pole, 3-Wire • 125 Volt		Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Smooth Face		White	M8200-HW	M8300-HW
		Ivory	M8200-HI	M8300-HI
		Lt Almond	M8200-HT	M8300-HT
		Brown	M8200-H	M8300-H
		Gray	M8200-HGY	M8300-HGY
		Black	M8200-HE	M8300-HE
		Red	M8200-HR	M8300-HR
		Blue	M8200-HB	M8300-HB
• Duplex Receptacle • Smooth Face • Tamper-Resistant	TR	White	MT820-W	MT830-W
	TR	Ivory	MT820-I	MT830-I
	TR	Lt Almond	MT820-T	MT830-T
	TR	Brown	MT820	MT830
	TR	Gray	MT820-GY	MT830-GY
	TR	Black	MT820-E	MT830-E
	TR	Red	MT820-R	MT830-R
	TR	Blue	MT820-B	MT830-B

Receptacles must be used with MSTWL series wiring modules (sold separately). See pg 28 for module details.

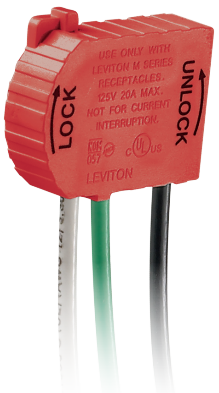

MSTWL-R

Lev-lok® Modular Wiring Devices: Receptacles

HOSPITAL GRADE
Heavy-Duty

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Isolated Ground	White	M8200-IGW	M8300-IGW
		Ivory	M8200-IGI	M8300-IGI
		Lt Almond	M8200-IGT	M8300-IGT
		Gray	M8200-IGG	M8300-IGG
		Black	M8200-IGE	M8300-IGE
		Red	M8200-IGR	M8300-IGR
		Orange	M8200-IG	M8300-IG
	• Duplex Receptacle • Smooth Face • Tamper-Resistant • Isolated Ground	White	MT820-IGW	MT830-IGW
		Ivory	MT820-IGI	MT830-IGI
		Lt Almond	MT820-IGT	MT830-IGT
		Gray	MT820-IGG	MT830-IGG
		Black	MT820-IGE	MT830-IGE
		Red	MT820-IGR	MT830-IGR
		Orange	MT820-IG	MT830-IG
DECORA PLUS™	• Duplex Receptacle • Smooth Face • Isolated Ground	White	MD820-IGW	MD830-IGW
		Ivory	MD820-IGI	MD830-IGI
		Lt Almond	MD820-IGT	MD830-IGT
		Gray	MD820-IGG	MD830-IGG
		Black	MD820-IGE	MD830-IGE
		Red	MD820-IGR	MD830-IGR
		Orange	MD820-IG	MD830-IG
	• Duplex Receptacle • Smooth Face • Isolated Ground • Tamper-Resistant	White	MDT82-IGW	MDT83-IGW
		Ivory	MDT82-IGI	MDT83-IGI
		Lt Almond	MDT82-IGT	MDT83-IGT
		Gray	MDT82-IGG	MDT83-IGG
		Black	MDT82-IGE	MDT83-IGE
		Red	MDT82-IGR	MDT83-IGR
		Orange	MDT82-IG	MDT83-IG



M8300-HW



M8300-IGR

INDUSTRIAL SPECIFICATION GRADE
Extra Heavy-Duty

	2-Pole, 3-Wire • 125 Volt	Color	15 Amp	20 Amp
STANDARD	• Duplex Receptacle • Smooth Face	White	M5262-W	M5362-W
		Ivory	M5262-I	M5362-I
		Lt Almond	M5262-T	M5362-T
		Brown	M5262	M5362
		Gray	M5262-GY	M5362-GY
		Black	M5262-E	M5362-E
		Red	M5262-R	M5362-R
		Blue	M5262-B	M5362-B



MD820-IGI

Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE
Extra Heavy-Duty

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Tamper-Resistant	White	M5262-SGW	M5362-SGW
		Ivory	M5262-SGI	M5362-SGI
		Lt Almond	M5262-SGT	M5362-SGT
		Brown	M5262-SG	M5362-SG
		Gray	M5262-SGG	M5362-SGG
		Black	M5262-SGE	M5362-SGE
	TR	Red	M5262-SGR	M5362-SGR
		Green	—	M5632-SGN
		Blue	M5262-SGB	M5362-SGB

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face	White	M5262-SW	M5362-SW
		Ivory	M5262-SI	M5362-SI
		Lt Almond	M5262-ST	M5362-ST
		Brown	M5262-S	M5362-S
		Gray	M5262-GYS	M5362-GYS
		Black	—	M5362-SE
		Red	M5262-SR	M5362-SR
		Blue	M5262-SB	M5362-SB
	• Duplex Receptacle • Smooth Face • Tamper-Resistant	White	MT562-SW	MT563-SW
		Ivory	MT562-SI	MT563-SI
		Lt Almond	MT562-ST	MT563-ST
		Brown	MT562-S	MT563-S
		Gray	MT562-SGY	MT563-SGY
	TR	Black	MT562-SE	MT563-SE
		Red	MT562-SR	MT563-SR
		Blue	MT562-SB	MT563-SB
	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled”	White	M5262-2SW	M5362-2SW
		Ivory	M5262-2SI	M5362-2SI
		Lt Almond	M5262-2ST	M5362-2ST
		Brown	M5262-2S	M5362-2S
		Gray	M5262-2SG	M5362-2SG
		Black	M5262-2SE	M5362-2SE
		Red	M5262-2SR	M5362-2SR
		Green	M5262-2SN	M5362-2SN
		Blue	M5262-2SU	M5362-2SU
	• Duplex Receptacle • Smooth Face • Split-Circuit • Separate lead provided	White	M5262-SCW	M5362-SCW
		Ivory	M5262-SCI	M5362-SCI
		Lt Almond	M5262-SCT	M5362-SCT
		Brown	M5262-SC	M5362-SC
		Gray	M5262-SCG	M5362-SCG
		Black	M5262-SCE	M5362-SCE
		Red	M5262-SCR	M5362-SCR
		Blue	M5262-SCB	M5362-SCB




M5362-SGW



MT563-SW

Receptacles must be used with MSTWL series wiring modules (sold separately). See pg 28 for module details.

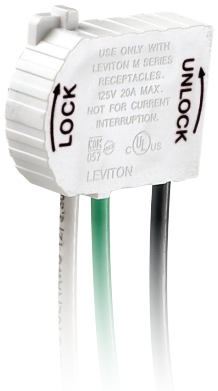

MSTWL-A

Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

STANDARD

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Smooth Face • Isolated Ground	White	M5262-IGW	M5362-IGW
	Ivory	M5262-IGI	M5362-IGI
	Lt Almond	M5262-IGT	M5362-IGT
	Gray	M5262-IGG	M5362-IGG
	Black	M5262-IGE	M5362-IGE
	Red	M5262-IGR	M5362-IGR
	Orange	M5262-IG	M5362-IG
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Two Outlets Marked “Controlled”	White	MT562-2SW	MT563-2SW
	Ivory	MT562-2SI	MT563-2SI
	Lt Almond	MT562-2ST	MT563-2ST
	Brown	MT562-2S	MT563-2S
	Gray	MT562-2SG	MT563-2SG
	Black	MT562-2SE	MT563-2SE
	Red	MT562-2SR	MT563-2SR
	Green	MT562-2SN	MT563-2SN
	Blue	MT562-2SU	MT563-2SU
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Split-Circuit • Separate lead provided	White	MT562-SCW	MT563-SCW
	Ivory	MT562-SCI	MT563-SCI
	Lt Almond	MT562-SCT	MT563-SCT
	Brown	MT562-SC	MT563-SC
	Gray	MT562-SCG	MT563-SCG
	Black	MT562-SCE	MT563-SCE
	Red	MT562-SCR	MT563-SCR
	Blue	MT562-SCB	MT563-SCB
• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked “Controlled” • Separate lead provided for controlled receptacle	White	M5262-1CW	M5362-1CW
	Ivory	M5262-1CI	M5362-1CI
	Lt Almond	M5262-1CT	M5362-1CT
	Brown	M5262-1C	M5362-1C
	Gray	M5262-1CG	M5362-1CG
	Black	M5262-1CE	M5362-1CE
	Red	M5262-1CR	M5362-1CR
	Blue	M5262-1CB	M5362-1CB
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Split-Circuit, One Outlet Marked “Controlled” • Seperate lead provided for controlled receptacle	White	MT562-1CW	MT563-1CW
	Ivory	MT562-1CI	MT563-1CI
	Lt Almond	MT562-1CT	MT563-1CT
	Brown	MT562-1C	MT563-1C
	Gray	MT562-1CG	MT563-1CG
	Black	MT562-1CE	MT563-1CE
	Red	MT562-1CR	MT563-1CR
	Blue	MT562-1CB	MT563-1CB



M5362-2SW



M5362-SCI

Receptacle modules are available in both stranded and solid wire. Options for 4-port push wire connectors are also available.
See pg 28 for module details.



Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Tamper-Resistant • Isolated Ground	White	MT562-IGW	MT563-IGW
		Ivory	MT562-IGI	MT563-IGI
		Lt Almond	MT562-IGT	MT563-IGT
		Gray	MT562-IGG	MT563-IGG
		Black	MT562-IGE	MT563-IGE
		Red	MT562-IGR	MT563-IGR
		Orange	MT562-IG	MT563-IG
DECORA PLUS™	• Duplex Receptacle • Smooth Face	White	M1626-W	M1636-W
		Ivory	M1626-I	M1636-I
		Lt Almond	M1626-T	M1636-T
		Brown	M1626	M1636
		Gray	M1626-GY	M1636-GY
		Black	M1626-E	M1636-E
		Red	M1626-R	M1636-R
		Blue	M1626-B	M1636-B
	• Duplex Receptacle • Smooth Face • Tamper-Resistant	White	MT162-W	MT163-W
		Ivory	MT162-I	MT163-I
		Lt Almond	MT162-T	MT163-T
		Brown	MT162	MT163
		Gray	MT162-GY	MT163-GY
		Black	MT162-E	MT163-E
		Red	MT162-R	MT163-R
		Blue	MT162-B	MT163-B
	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled”	White	M1626-2SW	M1636-2SW
		Ivory	M1626-2SI	M1636-2SI
		Lt Almond	M1626-2ST	M1636-2ST
		Brown	M1626-2S	M1636-2S
		Gray	M1626-2SG	M1636-2SG
		Black	M1626-2SE	M1636-2SE
		Red	M1626-2SR	M1636-2SR
		Green	M1626-2SN	M1636-2SN
		Blue	M1626-2SU	M1636-2SU
	• Duplex Receptacle • Smooth Face • Split-Circuit • Separate lead provided	White	M1626-SCW	M1636-SCW
		Ivory	M1626-SCI	M1636-SCI
		Lt Almond	M1626-SCT	M1636-SCT
		Brown	M1626-SC	M1636-SC
		Gray	M1626-SCG	M1636-SCG
		Black	M1626-SCE	M1636-SCE
		Red	M1626-SCR	M1636-SCR
		Blue	M1626-SCB	M1636-SCB




M1636-R



M1636-2SW

Receptacles must be used with MSTWL series wiring modules (sold separately). See pg 28 for module details.

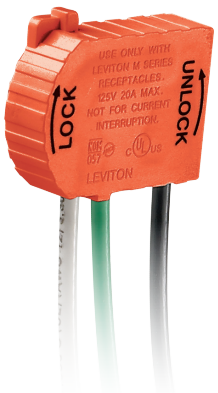

MSTWL-SIG

Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

DECORA PLUS™

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Smooth Face • Isolated Ground	White	M1626-IGW	M1636-IGW
	Ivory	M1626-IGI	M1636-IGI
	Lt Almond	M1626-IGT	M1636-IGT
	Gray	M1626-IGG	M1636-IGG
	Black	M1626-IGE	M1636-IGE
	Red	M1626-IGR	M1636-IGR
	Orange	M1626-IG	M1636-IG
• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked "Controlled"	White	M1626-1CW	M1636-1CW
	Ivory	M1626-1CI	M1636-1CI
	Lt Almond	M1626-1CT	M1636-1CT
	Brown	M1626-1C	M1636-1C
	Gray	M1626-1CG	M1636-1CG
	Black	M1626-1CE	M1636-1CE
	Red	M1626-1CR	M1636-1CR
	Blue	M1626-1CB	M1636-1CB
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Two Outlets Marked "Controlled"	White	MT162-2W	MT163-2W
	Ivory	MT162-2I	MT163-2I
	Lt Almond	MT162-2T	MT163-2T
	Brown	MT162-2	MT163-2
	Gray	MT162-2GY	MT163-2GY
	Black	MT162-2E	MT163-2E
	Red	MT162-2R	MT163-2R
	Green	MT162-2GN	MT163-2GN
	Blue	MT162-2BU	MT163-2BU
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Split-Circuit • Separate lead provided	White	MT162-SCW	MT163-SCW
	Ivory	MT162-SCI	MT163-SCI
	Lt Almond	MT162-SCT	MT163-SCT
	Brown	MT162-SC	MT163-SC
	Gray	MT162-SCG	MT163-SCG
	Black	MT162-SCE	MT163-SCE
	Red	MT162-SCR	MT163-SCR
	Blue	MT162-SCB	MT163-SCB
• Duplex Receptacle • Smooth Face • Tamper-Resistant • Isolated Ground	White	MT162-IGW	MT163-IGW
	Ivory	MT162-IGI	MT163-IGI
	Lt Almond	MT162-IGT	MT163-IGT
	Gray	MT162-IGG	MT163-IGG
	Black	MT162-IGE	MT163-IGE
	Red	MT162-IGR	MT163-IGR
	Orange	MT162-IG	MT163-IG



M1636-SCI



Detail of the solid brass pins on the back of a Lev-Lok Receptacle (straps may vary by device).



MT163-IG

Lev-lok® Modular Wiring Devices: Receptacles

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

2-Pole, 3-Wire • 125 Volt

DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Tamper-Resistant
- Split-Circuit, One Outlet Marked "Controlled"
- Separate lead provided for controlled receptacle

Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
White	MT162-1CW	MT163-1CW
Ivory	MT162-1CI	MT163-1CI
Lt Almond	MT162-1CT	MT163-1CT
Brown	MT162-1C	MT163-1C
Gray	MT162-1CG	MT163-1CG
Black	MT162-1CE	MT163-1CE
Red	MT162-1CR	MT163-1CR
Blue	MT162-1CB	MT163-1CB



MT163-1CW

Lev-lok® Modular Wiring Devices: GFCI Receptacles

HOSPITAL GRADE
Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt

DECORA PLUS™

- **SmartlockPro® Self-Test GFCI**
- Duplex Receptacle
- Power Indication LED
- Back and Side Wire
- 20 Amp Feed-Through Terminals

Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
White	MGFN1-HGW	MGFN2-HGW
Ivory	MGFN1-HGI	MGFN2-HGI
Lt Almond	MGFN1-HGT	MGFN2-HGT
Brown	MGFN1-HG	MGFN2-HG
Gray	MGFN1-HGG	MGFN2-HGG
Black	MGFN1-HGE	MGFN2-HGE
Red	MGFN1-HGR	MGFN2-HGR

DECORA PLUS™

- **SmartlockPro® Self-Test GFCI**
- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- Back and Side Wire
- 20 Amp Feed-Through Terminals

Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
White	MGFT1-HGW	MGFT2-HGW
Ivory	MGFT1-HGI	MGFT2-HGI
Lt Almond	MGFT1-HGT	MGFT2-HGT
Brown	MGFT1-HG	MGFT2-HG
Gray	MGFT1-HGG	MGFT2-HGG
Black	MGFT1-HGE	MGFT2-HGE
Red	MGFT1-HGR	MGFT2-HGR



MGFT2-HGW

INDUSTRIAL SPECIFICATION GRADE
Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt

DECORA PLUS™

- **SmartlockPro® Self-Test GFCI**
- Duplex Receptacle
- Power Indication LED
- 20 Amp Feed-Through Terminals

Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
White	MGFN1-W	MGFN2-W
Ivory	MGFN1-I	MGFN2-I
Lt Almond	MGFN1-T	MGFN2-T
Brown	MGFN1	MGFN2
Gray	MGFN1-GY	MGFN2-GY
Black	MGFN1-E	MGFN2-E
Red	MGFN1-R	MGFN2-R

DECORA PLUS™

- **SmartlockPro® Self-Test GFCI**
- Duplex Receptacle
- Power Indication LED
- Tamper-Resistant
- 20 Amp Feed-Through Terminals

Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
White	MGFT1-W	MGFT2-W
Ivory	MGFT1-I	MGFT2-I
Lt Almond	MGFT1-T	MGFT2-T
Brown	MGFT1	MGFT2
Gray	MGFT1-GY	MGFT2-GY
Black	MGFT1-E	MGFT2-E
Red	MGFT1-R	MGFT2-R



MGFN2-GY

Lev-lok® Modular Wiring Devices: USB Receptacles

HOSPITAL GRADE
Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™ • Duplex Receptacle • Two Type A USB Ports • Smooth Face • Tamper-Resistant	White	M56AA-HGW	M58AA-HGW
	Ivory	M56AA-HGI	M58AA-HGI
	Lt Almond	M56AA-HGT	M58AA-HGT
	Brown	M56AA-HG	M58AA-HG
	Gray	M56AA-HGG	M58AA-HGG
	Black	M56AA-HGE	M58AA-HGE
	Red	M56AA-HGR	M58AA-HGR
DECORA PLUS™ • Duplex Receptacle • One Type A & One Type C USB Port • Smooth Face • Tamper-Resistant	White	M56AC-HGW	M58AC-HGW
	Ivory	M56AC-HGI	M58AC-HGI
	Lt Almond	M56AC-HGT	M58AC-HGT
	Brown	M56AC-HG	M58AC-HG
	Gray	M56AC-HGG	M58AC-HGG
	Black	M56AC-HGE	M58AC-HGE
	Red	M56AC-HGR	M58AC-HGR



M58AA-HGR

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™ • Duplex Receptacle • Two Type A USB Ports • Smooth Face • Tamper-Resistant	White	M56AA-W	M58AA-W
	Ivory	M56AA-I	M58AA-I
	Lt Almond	M56AA-T	M58AA-T
	Brown	M56AA	M58AA
	Gray	M56AA-GY	M58AA-GY
	Black	M56AA-E	M58AA-E
	Red	M56AA-R	M58AA-R
	Orange	M56AA-O	M58AA-O
	Green	M56AA-N	M58AA-N
	Blue	M56AA-B	M58AA-B
DECORA PLUS™ • Duplex Receptacle • One Type A & One Type C USB Port • Smooth Face • Tamper-Resistant	White	M56AC-W	M58AC-W
	Ivory	M56AC-I	M58AC-I
	Lt Almond	M56AC-T	M58AC-T
	Brown	M56AC	M58AC
	Gray	M56AC-GY	M58AC-GY
	Black	M56AC-E	M58AC-E
	Red	M56AC-R	M58AC-R
	Orange	M56AC-O	M58AC-O
	Green	M56AC-N	M58AC-N
	Blue	M56AC-B	M58AC-B



M56AC-HGW

lev-lok® Circuit Analyzer

Connect the receptacle wiring module to the circuit analyzer to confirm that wiring is correct, or identify a wiring problem.
Catalog Number: LVLOK-TST



Lev-lok® Modular Wiring Device Modules

20 Amp, 125 Volt Max.	Module Color	Wire Type	Wire Colors	Cat. No.
Stranded Wire Leads	White	THHN	Black, White, Green	MSTWL-A
Stranded Wire Leads with Push Wire Connectors (4-Port Connector)	White	THHN	Black, White, Green	MSTWL-WST
Dual Module for 2-Gang Applications with Leads Pre-Installed in Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WTK
Stranded Wire Leads with Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WT6**
Stranded Wire Leads with Push Wire Connectors	Red	THHN	Black, White, Green	MSTWL-RT6**
Stranded Wire Leads for Emergency Circuits	Red	THHN	Black, White, Green	MSTWL-R
Stranded Wire Leads for Isolated Ground Circuits	Orange	THHN	Black, White, Green	MSTWL-IG
Stranded Wire Leads with Push Wire Connectors for Isolated Ground Circuits	Orange	THHN	Black, White, Green	MSTWL-WIG
Solid Wire Leads	White	THHN	Black, White, Green	MSTWL-SDA
Solid Wire Leads for Isolated Ground Circuits	Orange	THHN	Black, White, Green	MSTWL-SIG
Solid Wire Leads with Push Wire Connectors (4-Port Connector)	White	THHN	Black, White, Green	MSTWL-WSD
Solid Wire Leads with Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WD6**
Stranded Wire Leads for Low Leakage Circuits (For use in isolated power areas to comply with NEC 517.160)	White	XHHW-2	Brown/Yellow, Orange/Blue, Green/Yellow‡	MSTWL-XI*
Stranded Wire Leads for Low Leakage Circuits	White	XHHW-2	Black, White, Green/Yellow	MSTWL-XN*

* Add suffix of 0 for 6", 1 for 18", 2 for 24" or 3 for 36" long leads. Please allow 4 to 6 weeks for delivery.
** 6-port connector only on ground lead. 4-port connector on the hot & neutral leads. Special order only configurations.
‡ Wire order is hot, neutral, ground.





M56AC-HGW
Lev-lok USB Receptacle
shown with
MSTWL-A Module
attached.

Receptacles with Pre-Wired Leads

KEY FEATURES & BENEFITS

- Prewired, pre-stripped leads
- Hot, neutral and ground prewired with #12 AWG stranded leads, 6" in length
- Eliminates the need to make pigtails
- Available in the most common configurations
- No terminal screws means faster wiring and no need to wrap device with electrical tape

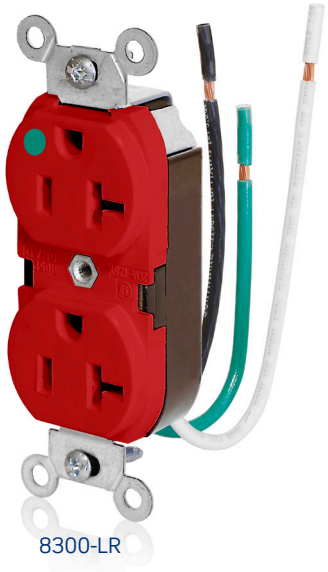
8300-LR

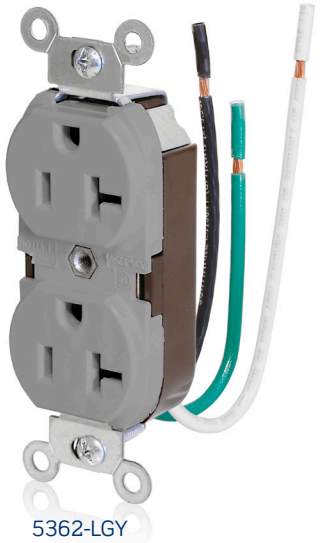
5362-LGY


5340-W

HOSPITAL GRADE
Heavy-Duty

2-Pole, 3-Wire • 125 Volt		Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Pre-Wired Leads	White	8200-LW	8300-LW
		Ivory	8200-LI	8300-LI
		Brown	8200-L	8300-L
		Gray	8200-LGY	8300-LGY
		Black	—	8300-LE
		Red	8200-LR	8300-LR
	• Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	White	8200-CW	8300-CW
		Ivory	8200-CI	8300-CI
		Gray	8200-CGY	8300-CGY

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

2-Pole, 3-Wire • 125 Volt		Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Pre-Wired Leads	White	5262-LW	5362-LW
		Ivory	5262-LI	5362-LI
		Lt Almond	—	5362-LT
		Brown	5262-L0	5362-L0
		Gray	5262-LGY	5362-LGY
		Black	5262-LE	5362-LE
		Red	5262-LR	5362-LR
	• Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	White	5262-CW	—
		Ivory	5262-CI	—
		Gray	5262-CGY	—


COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt		Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Pre-Wired Leads	White	5040-W	5340-W
		Ivory	5040-I	5340-I
		Brown	—	5340
		Gray	—	5340-GY
	• Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	White	5040-CW	5340-CW
		Ivory	5040-CI	5340-CI
		Gray	5040-CGY	5340-CGY

Receptacles with Pre-Wired Leads

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™ • Duplex Receptacle • Smooth Face • Pre-Wired Leads	White	16252-LW	16352-LW
	Ivory	16252-LI	16352-LI
	Brown	16252-L0	—
	Gray	16252-LGY	16352-LGY
	Black	16252-LE	16352-LE
DECORA PLUS™ • Duplex Receptacle • Smooth Face • Pre-Wired Leads (hot and neutral only)	White	—	16352-CW
	Ivory	—	16352-CI
	Gray	—	16352-CGY

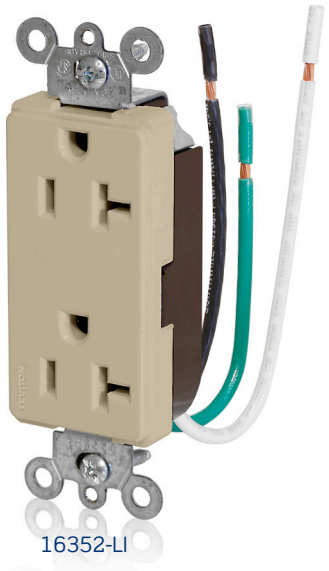

16352-LI

GFCI Receptacles with Pre-Wired Leads

INDUSTRIAL SPECIFICATION GRADE
Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™ • **SmartlockPro® Self-Test GFCI** • Duplex Receptacle • Power Indication LED • Tamper-Resistant • 5 Pre-Wired Leads • 20 Amp Feed-Through Terminals	White	GFTR1-5LW	GFTR2-5LW
	Ivory	GFTR1-5LI	GFTR2-5LI
	Lt Almond	GFTR1-5LT	GFTR2-5LT
	Brown	GFTR1-5L	GFTR2-5L
	Gray	GFTR1-5LG	GFTR2-5LG
	Black	GFTR1-5LE	GFTR2-5LE
	Red	GFTR1-5LR	GFTR2-5LR
DECORA PLUS™ • **SmartlockPro® Self-Test GFCI** • Duplex Receptacle • Power Indication LED • Tamper-Resistant • 3 Pre-Wired Leads (for non-feed through loads)	White	GFTR1-3LW	GFTR2-3LW
	Ivory	GFTR1-3LI	GFTR2-3LI
	Black	GFTR1-3LE	—


GFTR2-5LW

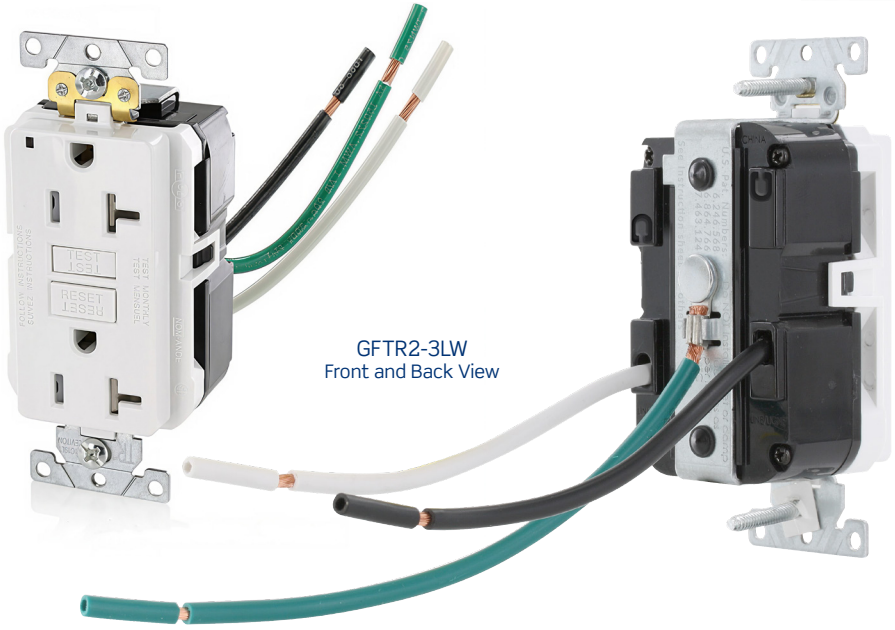
GFTR2-3LW
Front and Back View

SmartlockPro® AFCI Receptacles

Outlet Branch Circuit (OBC) AFCI Devices offer advanced technology to help protect against electrical fires. These devices are designed to interrupt power in the event potentially hazardous arcing is detected, which could originate from a number of sources including damaged wires and cords. Meeting the latest UL requirements for OBC AFCI outlets, they provide protection against series and parallel arcs. SmartlockPro® OBC AFCI devices feature Leviton's patented reset lockout and tamper-resistant technology. AFCI's are now required by the National Electrical Code® (NEC) in many areas.


AFTR2-HGW


AFTR2-T

HOSPITAL GRADE
Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™ • Duplex Receptacle • Power Indication LED • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	AFTR1-HGW	AFTR2-HGW
	Ivory	AFTR1-HGI	AFTR2-HGI
	Lt Almond	AFTR1-HGT	AFTR2-HGT
	Brown	AFTR1-HG	AFTR2-HG
	Gray	AFTR1-HGG	AFTR2-HGG
	Black	AFTR1-HGE	AFTR2-HGE
	Red	AFTR1-HGR	AFTR2-HGR

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA® • Duplex Receptacle • Power Indication LED • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	AFTR1-W	AFTR2-W
	Ivory	AFTR1-I	AFTR2-I
	Lt Almond	AFTR1-T	AFTR2-T
	Brown	AFTR1	AFTR2
	Gray	AFTR1-GY	AFTR2-GY
	Black	AFTR1-E	AFTR2-E
• Blank Face Receptacle • Power Indication LED • Back and Side Wire • 20 Amp Feed-Through Terminals	White	—	AFRBF-W
	Ivory	—	AFRBF-I
	Lt Almond	—	AFRBF-T

SmartlockPro® GFCI Receptacles


The SmartlockPro® Self-Test GFCIs contain the latest innovation in ground fault protection by automatically conducting a periodic internal test to confirm that the GFCI is able to respond to a ground fault. Easy to install, they take up to 25% less space in the wallbox vs. typical GFCIs and can fit into any box, even shallow ones. These slim GFCIs provide all the lockout benefits of our standard SmartlockPro® offering, and are available in tamper-resistant and non tamper-resistant versions. Constructed of resilient thermoplastic and able to withstand high torque levels, self-test GFCIs come in styles for every need, including a combination guide light/receptacle and a blankface device.



GFWT2-HGW FRONT


UNDERSTANDING THE GFCI STATUS INDICATOR LIGHT

Leviton GFCI devices feature an LED Status Indicator Light which provides a visual indication to the user of the status of GFCI protection. This is a convenient way to check the level of protection at-a-glance.




Green LED - Normal Operation.

- GFCI has passed self-test and is providing power



Red LED - Alert!

- Blinking - Initial self-test upon first power up
- Solid or blinking - Press TEST and RESET buttons to reset GFCI
- If GFCI will not reset OR solid or blinking red continues, replace device



No LED - No Power.

- GFCI in tripped state
- Press RESET button
- If GFCI will not reset, no power on the circuit

HOSPITAL GRADE
Extra Heavy-Duty

DECORA PLUS™ 2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Power Indication LED • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFNT1-HGW	GFNT2-HGW
	Ivory	GFNT1-HGI	GFNT2-HGI
	Lt Almond	GFNT1-HGT	GFNT2-HGT
	Brown	GFNT1-HG	GFNT2-HG
	Gray	GFNT1-HGG	GFNT2-HGG
	Black	GFNT1-HGE	GFNT2-HGE
	Red	GFNT1-HGR	GFNT2-HGR
• Duplex Receptacle • Power Indication LED • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFTR1-HGW	GFTR2-HGW
	Ivory	GFTR1-HGI	GFTR2-HGI
	Lt Almond	GFTR1-HGT	GFTR2-HGT
	Brown	GFTR1-HG	GFTR2-HG
	Gray	GFTR1-HGG	GFTR2-HGG
	Black	GFTR1-HGE	GFTR2-HGE
	Red	GFTR1-HGR	GFTR2-HGR

Leviton GFCIs feature a slim profile for easier installations



GFWT2-HGW SIDE

SmartlockPro® GFCI Receptacles

HOSPITAL GRADE
Extra Heavy-Duty


DECORA PLUS™

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Power Indication LED • Weather and Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFWT1-HGW	GFWT2-HGW
	Ivory	GFWT1-HGI	GFWT2-HGI
	Lt Almond	GFWT1-HGT	GFWT2-HGT
	Brown	GFWT1-HG	GFWT2-HG
	Gray	GFWT1-HGG	GFWT2-HGG
	Black	GFWT1-HGE	GFWT2-HGE
	Red	GFWT1-HGR	GFWT2-HGR
• Duplex Receptacle • Tamper-Resistant • **WHITE** Guidelight • Power Indication LED • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFNL1-HGW	GFNL2-HGW
	Ivory	GFNL1-HGI	GFNL2-HGI
	Lt Almond	GFNL1-HGT	GFNL2-HGT
	Brown	GFNL1-HG	GFNL2-HG
	Gray	GFNL1-HGG	GFNL2-HGG
	Black	GFNL1-HGE	GFNL2-HGE
	Red	GFNL1-HGR	GFNL2-HGR
• Duplex Receptacle • Tamper-Resistant • **AMBER** Guidelight • Power Indication LED • Back and Side Wire • 20 Amp Feed-Through Terminals	White	—	GFNL2-HWA
• Duplex Receptacle • DIN Rail Mount • Power Indication LED • Terminal Blocks • 20 Amp Feed-Through Terminals • Grounding	Black	GFNT1-DIN	GFNT2-DIN

Amber guidelight ideal for healthcare applications where disrupting circadian rhythms is a concern



GFTR1-HGI
(with included wallplate)

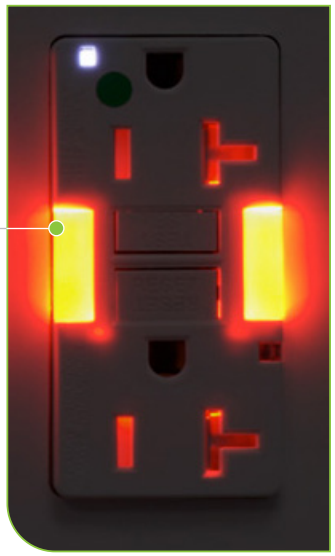

GFNL2-HWA

INDUSTRIAL SPECIFICATION GRADE
Extra Heavy-Duty

DECORA PLUS™

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Power Indication LED • Back and Side Wire • 20 Amp Feed-Through Terminals	White	G5262-W	G5362-W
	Ivory	G5262-I	G5362-I
	Lt Almond	G5262-T	G5362-T
	Brown	G5262	G5362
	Gray	G5262-GY	G5362-GY
	Black	G5262-E	G5362-E
	Red	G5262-R	G5362-R
• Duplex Receptacle • Power Indication LED • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals	White	G5262-TW	G5362-TW
	Ivory	G5262-TI	G5362-TI
	Lt Almond	G5262-TT	G5362-TT
	Brown	G5262-T0	G5362-T0
	Gray	G5262-TGY	G5362-TGY
	Black	G5262-TE	G5362-TE
	Red	G5262-TR	G5362-TR



G 5362-TT


SmartlockPro® GFCI Receptacles

INDUSTRIAL SPECIFICATION GRADE
Extra Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™			
• Duplex Receptacle • Power Indication LED • Tamper-Resistant • Isolated Ground • Back and Side Wire • 20 Amp Feed-Through Terminals	White	GFTR1-IGW	GFTR2-IGW
	Ivory	GFTR1-IGI	GFTR2-IGI
	Lt Almond	GFTR1-IGT	GFTR2-IGT
	Brown	GFTR1-IG	GFTR2-IG
	Gray	GFTR1-IGG	GFTR2-IGG
	Black	GFTR1-IGE	GFTR2-IGE
	Red	GFTR1-IGR	GFTR2-IGR
	Orange	GFTR1-IGO	GFTR2-IGO
• Duplex Receptacle • Weather and Tamper-Resistant • Power Indication LED • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	G5262-WTW	G5362-WTW
	Ivory	G5262-WTI	G5362-WTI
	Lt Almond	G5262-WTT	G5362-WTT
	Brown	G5262-WT	G5362-WT
	Gray	G5262-WTG	G5362-WTG
	Black	G5262-WTE	G5362-WTE
	Red	G5262-WTR	G5362-WTR
• Single Receptacle • Tamper-Resistant • Pilot Light (Illuminated - ON) • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFPL1-PLW	GFPL2-PLW
	Ivory	GFPL1-PLI	GFPL2-PLI
	Lt Almond	GFPL1-PLT	GFPL2-PLT
	Brown	GFPL1-PL	GFPL2-PL
	Gray	GFPL1-PLG	GFPL2-PLG
	Black	GFPL1-PLE	GFPL2-PLE
	Red	GFPL1-PLR	GFPL2-PLR

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA®			
• Duplex Receptacle • Power Indication LED • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFNT1-W	GFNT2-W
	Ivory	GFNT1-I	GFNT2-I
	Lt Almond	GFNT1-T	GFNT2-T
	Brown	GFNT1	GFNT2
	Gray	GFNT1-GY	GFNT2-GY
	Black	GFNT1-E	GFNT2-E
	Red	—	GFNT2-R
• Duplex Receptacle • Power Indication LED • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFTR1-W	GFTR2-W
	Ivory	GFTR1-I	GFTR2-I
	Lt Almond	GFTR1-T	GFTR2-T
	Brown	GFTR1	GFTR2
	Gray	GFTR1-GY	GFTR2-GY
	Black	GFTR1-E	GFTR2-E
	Red	—	GFTR2-R

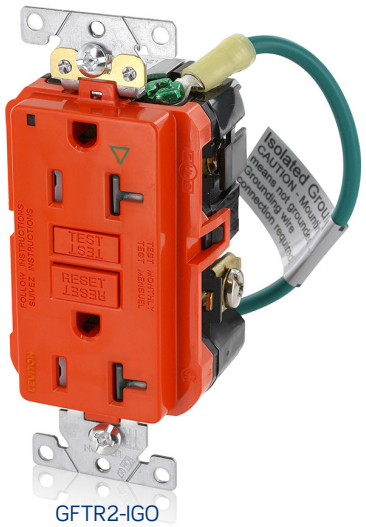

GFTR2-IGO


GFPL2-PLG


GFNT2-R

SmartlockPro® GFCI Receptacles

COMMERCIAL SPECIFICATION GRADE

DECORA®

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Power Indication LED • Weather-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals	White	GFWR1-W*	GFWR2-W*
	Black	GFWR1-E*	GFWR2-E*
• Duplex Receptacle • Power Indication LED • Weather and Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals	White	GFWT1-W*	GFWT2-W*
	Ivory	GFWT1-I*	GFWT2-I*
	Lt Almond	GFWT1-T*	GFWT2-T*
	Gray	GFWT1-GY*	GFWT2-GY*
	Black	GFWT1-E*	GFWT2-E*
• Duplex Receptacle Guidelight • Power Indication LED • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals	White	GFNL1-W	GFNL2-W
	Ivory	GFNL1-I	GFNL2-I
	Lt Almond	GFNL1-T	GFNL2-T
	Black	GFNL1-E	—
• Duplex Receptacle • Power Indication LED • Tamper-Resistant • Audible Trip Alert • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFTA1-W	GFTA2-W
	Ivory	GFTA1-I	GFTA2-I
	Lt Almond	GFTA1-T	GFTA2-T
• Combination Switch with Single Receptacle • Power Indication LED • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFSW1-W	—
	Ivory	GFSW1-I	—
	Lt Almond	GFSW1-T	—

* No self-grounding clip on device



GFWT1-W



GFNL2-T

SmartlockPro® Dual Function AFCI/GFCI Receptacles

The SmartlockPro AFCI/GFCI Receptacle offers an effective alternative to a Dual Function breaker and features the convenience of localized test and reset. It provides clear visual indication of status making it intuitive for users to assess various conditions such as power availability and GFCI self-test status. The device also distinguishes between a trip caused by a ground fault and a trip caused by an arc fault.

UNDERSTANDING THE DUAL FUNCTION AFCI/GFCI STATUS INDICATOR LIGHT



Solid Green LED.

- Load Power ON.
- RESET button is in.
  Device is in normal working state.
- Load Power OFF.
- RESET button is out.
  Line & load wires are reversed.




Solid or Constant Flashing Red LED.

- Load Power ON.
- RESET button is in.
  Press TEST button & RESET button.
  If RED indication continues or will not RESET, replace device.
- Load Power OFF.
- RESET button is out.
  Device has tripped & self-test function detects a potential problem.
  If RED indication continues or will not RESET, replace device.



LED OFF & Flashes Red Twice Every 5 Seconds.

- Load Power OFF.
- RESET button is out.
  AFCI trip; press RESET, if device continues to trip, contact an electrician.



LED is OFF.

- Load Power OFF.
  RESET button is out.
  GFCI trip; press RESET, if device will not reset, there is no power on the circuit.

HOSPITAL GRADE
Heavy-Duty

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™ • Duplex Receptacle • Power Indication LED • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate NOT Included	White	AGTR1-HGW	AGTR2-HGW
	Ivory	AGTR1-HGI	AGTR2-HGI
	Lt Almond	AGTR1-HGT	AGTR2-HGT
	Brown	AGTR1-HG	AGTR2-HG
	Gray	AGTR1-HGG	AGTR2-HGG
	Black	AGTR1-HGE	AGTR2-HGE
	Red	AGTR1-HGR	AGTR2-HGR

COMMERCIAL SPECIFICATION GRADE

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA® • Duplex Receptacle • Power Indication LED • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	AGTR1-W	AGTR2-W
	Ivory	AGTR1-I	AGTR2-I
	Lt Almond	AGTR1-T	AGTR2-T
	Brown	AGTR1	AGTR2
	Gray	AGTR1-GY	AGTR2-GY
	Black	AGTR1-E	AGTR2-E



AGTR2-HGT

Surge Protective Receptacles

The value of these receptacles and ease of installation allow for placement anywhere you have a standard electrical outlet. With a small investment, you have the assurance that your equipment is well protected, from a heart monitor in the emergency room, to a computer in the office, or a big screen TV in the living room.

HOSPITAL GRADE
Heavy-Duty

DECORA PLUS™

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Indicator Light • Back and Side Wire • Wallplate Included	White	8280-W	8380-W
	Ivory	8280-I	8380-I
	Lt Almond	8280-T	—
	Brown	8280	8380
	Gray	—	8380-GY
	Red	8280-R	8380-R
	Blue	8280-B	8380-B
• Single Receptacle • Indicator Light • Audible Alarm • Back and Side Wire • Wallplate Included	Ivory	—	8381-I
• Duplex Receptacle • Indicator Light • Audible Alarm • Isolated Ground • Back and Side Wire • Wallplate Included	White	8280-IGW	8380-IGW
	Ivory	8280-IGI	8380-IGI
	Gray	—	8380-IGG
	Orange	8280-IGO	8380-IGO
	Blue	8280-IGB	8380-IGB


8380-GY

COMMERCIAL SPECIFICATION GRADE

DECORA PLUS™

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Indicator Light • Back and Side Wire • Wallplate Included	White	5280-W	5380-W
	Ivory	5280-I	5380-I
	Lt Almond	5280-T	—
	Brown	5280	5380
	Gray	5280-GY	5380-GY
	Red	5280-R	5380-R
	Blue	5280-B	5380-B
• Duplex Receptacle • Indicator Light • Isolated Ground • Back and Side Wire • Wallplate Included	White	5280-IGW	5380-IGW
	Ivory	5280-IGI	5380-IGI
	Brown	5280-IG	5380-IG
	Gray	—	5380-IGG
	Orange	5280-IGO	5380-IGO
	Blue	5280-IGB	5380-IGB
• Duplex Receptacle • Indicator Light • Audible Alarm • Back and Side Wire • Wallplate Included	White	7280-W	7380-W
	Ivory	7280-I	7380-I
	Lt Almond	7280-T	—
	Gray	—	7380-GY
	Blue	7280-B	7380-B


5380-IGI


7380-W

Marked “Controlled” Receptacles

For use with plug load control systems

The National Electrical Code requires all 15 A & 20 A, 125 V receptacles that are automatically controlled to be marked with a specific symbol ⏻ and the word “CONTROLLED” on the receptacle.

- Decora Plus™ and Standard Duplex options
- Conventionally wired, Lever Edge™, and Lev-Lok® modular wiring system platforms available
- Control either one outlet or both outlets
  - For conventionally wired devices with one marked "controlled" receptacle, "hot" tab is split
  - For Lev-Lok devices with one marked "controlled" receptacle, an additional "hot" contact is split internally, and a seperate lead is provided for the controlled receptacle

Plug load control automatically turns off plug loads when a space is vacated. IECC, ASHRAE 90.1, and Title 24 require sensor- or schedule-based control with controlled receptacles.

Learn more at
leviton.com/plugloadcontrol

HOSPITAL GRADE
Heavy-Duty

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled” • Back and Side Wire	White	8200-H2W	8300-H2W
		Ivory	8200-H2I	8300-H2I
		Gray	8200-H2G	8300-H2G
		Black	8200-H2E	8300-H2E
		Red	8200-H2R	8300-H2R
	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked “Controlled” • Back and Side Wire	White	8200-H1W	8300-H1W
		Ivory	8200-H1I	8300-H1I
		Gray	8200-H1G	8300-H1G
		Black	8200-H1E	8300-H1E
		Red	8200-H1R	8300-H1R
	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled” • Tamper-Resistant • Back and Side Wire	White	T8200-2PW	T8300-2PW
		Ivory	T8200-2PI	T8300-2PI
		Gray	T8200-2PG	T8300-2PG
		Black	T8200-2PE	T8300-2PE
		Red	T8200-2PR	T8300-2PR
	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked “Controlled” • Tamper-Resistant • Back and Side Wire	White	T8200-1PW	T8300-1PW
		Ivory	T8200-1PI	T8300-1PI
		Gray	T8200-1PG	T8300-1PG
		Black	T8200-1PE	T8300-1PE
		Red	T8200-1PR	T8300-1PR
DECORA PLUS™	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled” • Back and Side Wire	White	D8200-H2W	D8300-H2W
	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked “Controlled” • Back and Side Wire	White	D8200-H1W	D8300-H1W
	• Duplex Receptacle • Smooth Face • Two Outlets Marked “Controlled” • Tamper-Resistant • Back and Side Wire	White	DT820-S2W	DT830-S2W



T8200-2PW



D8300-H2W

Marked "Controlled" Receptacles

HOSPITAL GRADE
Heavy-Duty

DECORA PLUS™

- Duplex Receptacle
- Smooth Face
- Split-Circuit, One Outlet Marked "Controlled"
- Tamper-Resistant
- Back and Side Wire

TR

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	White	DT820-S1W	DT830-S1W



DT830-S1W

INDUSTRIAL SPECIFICATION GRADE
Extra Heavy-Duty

STANDARD

- Duplex Receptacle
- Smooth Face
- Two Outlets Marked "Controlled"
- Tamper-Resistant
- Back and Side Wire

TR

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	White	5262-2PW	5362-2PW
	Ivory	5262-2PI	5362-2PI
	Lt Almond	5262-2PT	5362-2PT
	Brown	5262-2P	5362-2P
	Gray	5262-2PG	5362-2PG
	Black	5262-2PE	5362-2PE
	Red	5262-2PR	5362-2PR
	Green	—	5362-2PN
	Blue	5262-2PB	5362-2PB

- Duplex Receptacle
- Smooth Face
- Split-Circuit, One Outlet Marked "Controlled"
- Tamper-Resistant
- Back and Side Wire

TR

	White	5262-1PW	5362-1PW
	Ivory	5262-1PI	5362-1PI
	Lt Almond	5262-1PT	5362-1PT
	Brown	5262-1P	5362-1P
	Gray	5262-1PG	5362-1PG
	Black	5262-1PE	5362-1PE
	Red	5262-1PR	5362-1PR
	Blue	5262-1PB	5362-1PB



5362-1PW

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty


STANDARD

- Duplex Receptacle
- Smooth Face
- Two Outlets Marked "Controlled"
- Back and Side Wire

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	White	5262-S2W	5362-S2W
	Ivory	5262-S2I	5362-S2I
	Lt Almond	5262-S2T	5362-S2T
	Brown	5262-S2	5362-S2
	Gray	5262-S2G	5362-S2G
	Black	5262-S2E	5362-S2E
	Red	5262-S2R	5362-S2R
	Green	—	5362-S2N
	Blue	5262-S2B	5362-S2B

- Duplex Receptacle
- Smooth Face
- Split-Circuit, One Outlet Marked "Controlled"
- Back and Side Wire

	White	5262-S1W	5362-S1W
	Ivory	5262-S1I	5362-S1I
	Lt Almond	5262-S1T	5362-S1T
	Brown	5262-S1	5362-S1
	Gray	5262-S1G	5362-S1G
	Black	5262-S1E	5362-S1E
	Red	5262-S1R	5362-S1R
	Green	—	5362-S1N
	Blue	5262-S1B	5362-S1B

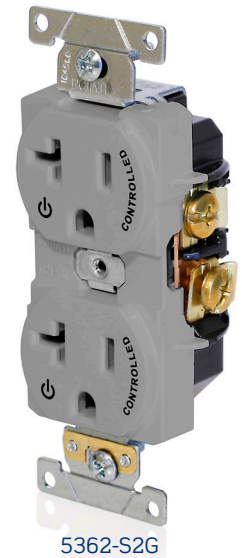

5362-S2G

Marked "Controlled" Receptacles

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

DECORA PLUS™	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	• Duplex Receptacle • Smooth Face • Two Outlets Marked "Controlled" • Back and Side Wire	White	16252-2PW	16352-2PW
		Ivory	16252-2PI	16352-2PI
		Lt Almond	16252-2PT	16352-2PT
		Brown	16252-2P	16352-2P
		Gray	16252-2PG	16352-2PG
		Black	16252-2PE	16352-2PE
		Red	16252-2PR	16352-2PR
		Blue	16252-2PB	16352-2PB
	• Duplex Receptacle • Smooth Face • Two Outlets Marked "Controlled" • Tamper-Resistant • Back and Side Wire	White	TDR15-S2W	TDR20-S2W
		Ivory	TDR15-S2I	TDR20-S2I
		Lt Almond	TDR15-S2T	TDR20-S2T
		Brown	TDR15-S2	TDR20-S2
		Gray	TDR15-S2G	TDR20-S2G
		Black	TDR15-S2E	TDR20-S2E
	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked "Controlled" • Back and Side Wire	White	16252-1PW	16352-1PW
		Ivory	16252-1PI	16352-1PI
		Lt Almond	16252-1PT	16352-1PT
		Brown	16252-1P	16352-1P
		Gray	16252-1PG	16352-1PG
		Black	16252-1PE	16352-1PE
		Red	16252-1PR	16352-1PR
		Blue	16252-1PB	16352-1PB
	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked "Controlled" • Tamper-Resistant • Back and Side Wire	White	TDR15-S1W	TDR20-S1W
		Ivory	TDR15-S1I	TDR20-S1I
		Lt Almond	TDR15-S1T	TDR20-S1T
		Brown	TDR15-S1	TDR20-S1
		Gray	TDR15-S1G	TDR20-S1G
		Black	TDR15-S1E	TDR20-S1E

COMMERCIAL SPECIFICATION GRADE

STANDARD	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	• Duplex Receptacle • Smooth Face • Two Outlets Marked "Controlled" • Side Wire Only	White	CR015-2PW	CR020-2PW
		Ivory	CR015-2PI	CR020-2PI
		Lt Almond	CR015-2PT	CR020-2PT
		Gray	CR015-2PG	CR020-2PG
		Black	CR015-2PE	CR020-2PE
		Green	CR015-2PN	CR020-2PN
	• Duplex Receptacle • Smooth Face • Two Outlets Marked "Controlled" • Tamper-Resistant • Back and Side Wire	White	TBR15-S2W	TBR20-S2W
		Ivory	TBR15-S2I	TBR20-S2I
		Lt Almond	TBR15-S2T	TBR20-S2T
		Brown	TBR15-S2	TBR20-S2
		Gray	TBR15-S2G	TBR20-S2G
		Black	TBR15-S2E	TBR20-S2E
		Green	TBR15-S2N	TBR20-S2N



TDR20-S2W



16352-1PW



CR020-2PW

Marked "Controlled" Receptacles

COMMERCIAL SPECIFICATION GRADE

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
STANDARD	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked "Controlled" • Side Wire Only	White	CR015-1PW	CR020-1PW
		Ivory	CR015-1PI	CR020-1PI
		Lt Almond	CR015-1PT	CR020-1PT
		Gray	CR015-1PG	CR020-1PG
		Black	CR015-1PE	CR020-1PE
		Green	CR015-1PN	CR020-1PN
	• Duplex Receptacle • Smooth Face • Split-Circuit, One Outlet Marked "Controlled" • Tamper-Resistant • Back and Side Wire	White	TBR15-S1W	TBR20-S1W
		Ivory	TBR15-S1I	TBR20-S1I
		Lt Almond	TBR15-S1T	TBR20-S1T
		Brown	TBR15-S1	TBR20-S1
		Gray	TBR15-S1G	TBR20-S1G
		Black	TBR15-S1E	TBR20-S1E
		Green	TBR15-S1N	TBR20-S1N



TBR20-S1G

Marked "Controlled" GFCI Receptacles

HOSPITAL GRADE
Heavy-Duty

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™	• Duplex Receptacle • Power Indication LED • Two Outlets Marked ""Controlled" • Tamper-Resistant • Back and Side Wire • 20 Amp Feed-Through Terminals • Wallplate Included	White	GFTR1-H2W	GFTR2-H2W
		Ivory	GFTR1-H2I	GFTR2-H2I
		Gray	GFTR1-H2G	GFTR2-H2G
		Black	GFTR1-H2E	GFTR2-H2E
		Red	GFTR1-H2R	GFTR2-H2E



GFTR2-H2W
(with included wallplate)

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
DECORA PLUS™	• Duplex Receptacle • Power Indication LED • Tamper-Resistant • Two Outlets Marked "Controlled" • Back and Side Wire • 20 Amp Feed-Through Terminals	White	—	G5362-2TW
		Ivory	—	G5362-2TI
		Lt Almond	—	G5362-2TT
		Brown	—	G5362-2T0
		Gray	—	G5362-2TG
		Black	—	G5362-2TE
		Red	—	G5362-2TR
		Green	—	G5362-2TN



G5362-2TN

Marked "Controlled" USB Receptacles

HOSPITAL GRADE
Extra Heavy-Duty

DECORA PLUS™

- Duplex Receptacle
- Two Outlets Marked ""Controlled""
- Two Type A USB Ports (3.6 Amp)
- Smooth Face
- Tamper-Resistant
- Back and Side Wire

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	White	T5632-H2W	T5832-H2W
	Ivory	T5632-H2I	T5832-H2I
	Lt Almond	T5632-H2T	T5832-H2T
	Gray	T5632-H2G	T5832-H2G
	Black	T5632-H2E	T5832-H2E
	Red	T5632-H2R	T5832-H2R

DECORA PLUS™

- Duplex Receptacle
- Two Outlets Marked ""Controlled"
- One Type A & One Type C USB Port (5.1 Amp)
- Smooth Face
- Tamper-Resistant
- Back and Side Wire

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	White	T5633-H2W	T5833-H2W
	Ivory	T5633-H2I	T5833-H2I
	Lt Almond	T5633-H2T	T5833-H2T
	Gray	T5633-H2G	T5833-H2G
	Black	T5633-H2E	T5833-H2E
	Red	T5633-H2R	T5833-H2R

COMMERCIAL SPECIFICATION GRADE

DECORA PLUS™

- Duplex Receptacle
- Two Outlets Marked "Controlled"
- One Type A and One Type C USB Port
- Tamper-Resistant
- Back and Side Wire

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	White	T5633-2W	T5833-2W
	Ivory	T5633-2I	T5833-2I
	Brown	T5633-2B	T5833-2B
	Gray	T5633-2G	T5833-2G
	Black	T5633-2E	T5833-2E
	Green	T5633-2GN	T5833-2GN
	Blue	T5633-2BU	T5833-2BU

For Lev-lok Marked "Controlled" devices, please refer to Lev-lok section on page 18.



T5832-2W



T5833-2W

USB Receptacles

HOSPITAL GRADE
Heavy-Duty

DECORA PLUS™

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • USB, Two Type A Ports (3.6 Amp) • Tamper-Resistant • Back and Side Wire	White	T5632-HGW	T5832-HGW
	Ivory	T5632-HGI	T5832-HGI
	Lt Almond	T5632-HGT	T5832-HGT
	Brown	T5632-HG	T5832-HG
	Gray	T5632-HGG	T5832-HGG
	Black	T5632-HGE	T5832-HGE
	Red	T5632-HGR	T5832-HGR
• Duplex Receptacle • USB, One Type A & One Type C Port (5.1 Amp) • Tamper-Resistant • Back and Side Wire	White	T5633-HGW	T5833-HGW
	Ivory	T5633-HGI	T5833-HGI
	Lt Almond	T5633-HGT	T5833-HGT
	Brown	T5633-HG	T5833-HG
	Gray	T5633-HGG	T5833-HGG
	Black	T5633-HGE	T5833-HGE
	Red	T5633-HGR	T5833-HGR



T5832-HGW

COMMERCIAL SPECIFICATION GRADE

DECORA®

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Power Delivery USB, Two Type C Ports (6 Amp, 60W) • Premium - Ultra • Tamper-Resistant • Wire Leads	White	CC1P6-W	CC2P6-W
	Ivory	CC1P6-I	CC2P6-I
	Lt Almond	CC1P6-T	CC2P6-T
	Brown	CC1P6-B	CC2P6-B
	Gray	CC1P6-GY	CC2P6-GY
	Black	CC1P6-E	CC2P6-E
• Duplex Receptacle • Power Delivery USB, One Type A & One Type C Port (4.5 Amp, 60W) • Premium - Ultra • Tamper-Resistant • Wire Leads	White	AC1P6-W	AC2P6-W
	Ivory	AC1P6-I	AC2P6-I
	Lt Almond	AC1P6-T	AC2P6-T
	Brown	AC1P6-B	AC2P6-B
	Gray	AC1P6-GY	AC2P6-GY
	Black	AC1P6-E	AC2P6-E
• Duplex Receptacle • Power Delivery USB, Two Type C Ports (6 Amp, 30W) • High-Speed • Tamper-Resistant • Back and Side Wire	White	CC1P3-W	CC2P3-W
	Ivory	CC1P3-I	CC2P3-I
	Lt Almond	CC1P3-T	CC2P3-T
	Brown	CC1P3-B	CC2P3-B
	Gray	CC1P3-GY	CC2P3-GY
	Black	CC1P3-E	CC2P3-E
• Duplex Receptacle • USB, Two Type C Ports (6 Amp, 30W) • Fast Charging • Tamper-Resistant • Back and Side Wire	White	CC1X3-W	CC2X3-W
	Ivory	CC1X3-I	CC2X3-I
	Lt Almond	CC1X3-T	CC2X3-T
	Brown	CC1X3-B	CC2X3-B
	Gray	CC1X3-GY	CC2X3-GY
	Black	CC1X3-E	CC2X3-E
• Duplex Receptacle • USB, One Type A & One Type C Port (5.1 Amp, 27W) • Fast Charging • Tamper-Resistant • Back and Side Wire	White	AC1X3-W	AC2X3-W
	Ivory	AC1X3-I	AC2X3-I
	Lt Almond	AC1X3-T	AC2X3-T
	Brown	AC1X3-B	AC2X3-B
	Gray	AC1X3-GY	AC2X3-GY
	Black	AC1X3-E	AC2X3-E



CC1X3-W



AC2X3-W

USB Receptacles

COMMERCIAL SPECIFICATION GRADE

DECORA®

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • USB, Two Type C Ports (6 Amp, 30W) • Tamper-Resistant • Back and Side Wire	White	T5635-W	T5835-W
	Ivory	T5635-I	T5835-I
	Lt Almond	T5635-T	T5835-T
	Brown	T5635-B	T5835-B
	Gray	T5635-G	T5835-G
	Black	T5635-E	T5835-E
• Duplex Receptacle • USB, One Type A & One Type C Port (4.8 Amp, 24W) • Weather-Resistant • Wire Leads	White	W5633-W	W5833-W
• Duplex Receptacle • USB, Two Type C Ports (3.6 Amp, 18W) • Standard, for everyday charging • Back and Side Wire	White	BCC15-W	BCC20-W
	Ivory	BCC15-I	BCC20-I
	Lt Almond	BCC15-T	BCC20-T
	Brown	BCC15-B	BCC20-B
	Gray	BCC15-GY	BCC20-GY
	Black	BCC15-E	BCC20-E
• Duplex Receptacle • USB, One Type A & One Type C Port (3.6 Amp, 18W) • Standard, for everyday charging • Back and Side Wire	White	BAC15-W	BAC20-W
	Ivory	BAC15-I	BAC20-I
	Lt Almond	BAC15-T	BAC20-T
	Brown	BAC15-B	BAC20-B
	Gray	BAC15-GY	BAC20-GY
	Black	BAC15-E	BAC20-E


W5633-W



BCC15-GY

Combination USB/GFCI Receptacles

COMMERCIAL SPECIFICATION GRADE

DECORA®

2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
• Duplex Receptacle • Power Indication LED • USB, One Type A & One Type C Port (4.8 Amp, 24W) • SmartlockPro® GFCI • Tamper-Resistant • Wire Leads	White	GUAC1-W	GUAC2-W
	Lt Almond	GUAC1-T	GUAC2-T
	Black	GUAC1-E	GUAC2-E

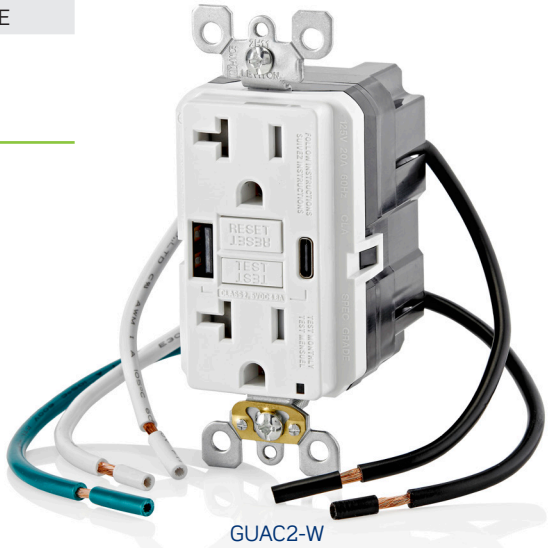
GUAC2-W

4-in-1™ Receptacles

Hospital Grade 4-in-1™ Receptacles provide a simple transition in retrofit applications to comply with new receptacle requirements in health care facilities. These devices allow you to increase the number of receptacles in your facility without having to pull new wires.

HOSPITAL GRADE
Heavy-Duty


4-IN-1™	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	• Quadruplex Receptacle • Side Wire Only	White	1254-HW	21254-HW
		Ivory	1254-HI	21254-HI
		Brown	1254-H	21254-H
		Gray	—	21254-HGY
		Red	1254-HR	21254-HR
	• Quadruplex Receptacle • Isolated Ground • Side Wire Only	White	—	21254-IGW
		Ivory	—	21254-IGI
		Orange	1254-IG	21254-IG
	• Quadruplex Receptacle • **Surge Protective** • Indicator Light • Side Wire Only	White	8480-W	8490-W
		Ivory	8480-I	8490-I
		Red	8480-R	8490-R
	• Quadruplex Receptacle • **Surge Protective** • Isolated Ground • Indicator Light • Side Wire Only	White	8480-IGW	—
		Ivory	8480-IGI	8490-IGI
		Orange	—	8490-IG
		Blue	8480-IGB	8490-IGB



21254-HI (Front)

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

4-IN-1™	2-Pole, 3-Wire • 125 Volt	Color	NEMA 5-15R 15 Amp	NEMA 5-20R 20 Amp
	• Quadruplex Receptacle • Side Wire Only	White	1254-W	21254-W
		Ivory	1254-I	21254-I
		Brown	1254	21254
		Gray	1254-GY	21254-GY
		Black	1254-E	21254-E
		Red	1254-R	21254-R
		Yellow	—	21254-Y
	• Quadruplex Receptacle • **Surge Protective** • Indicator Light • Side Wire Only	White	5480-W	5490-W
		Ivory	5480-I	5490-I
		Gray	5480-GY	5490-GY
		Red	5480-R	—
		Blue	5480-BU	5490-BU
	• Quadruplex Receptacle • **Surge Protective** • Isolated Ground • Indicator Light • Side Wire Only	Ivory	—	5490-IGI
		Orange	5480-IG	5490-IG
		Blue	—	5490-IGB

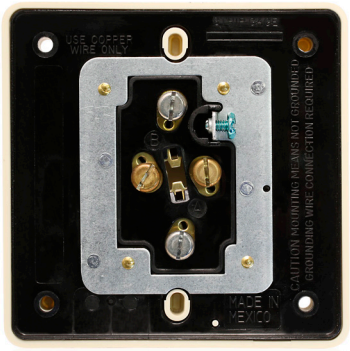
21254-HI (Back)


21254-W (Front)

Combination Straight & Locking Blade Receptacles

INDUSTRIAL SPECIFICATION GRADE
Heavy-Duty

NEMA 5-15R  NEMA L5-15R 

2-Pole, 3-Wire • 125 Volt		Feed	Color	15 Amp
COMBO	• Duplex Receptacle • Smooth Face • Back and Side Wire	Common Feed	Black	4792
		2 Hot, 1 Neutral Return	Black	4794-1R
		2 Hot, 2 Neutral Returns	Black	4795-2R


4792

Clock Hanger & Display Receptacles

COMMERCIAL SPECIFICATION GRADE

NEMA 5-15R  NEMA 5-20R 

2-Pole, 3-Wire • 125 Volt		Color	15 Amp	20 Amp
CLOCK-HANGER	• Recessed Single Receptacle with Hook on Wallplate • Smooth Face • Tamper-Resistant • Back and Side Wire 	White	T5015-CHW	T5020-CHW
		Ivory	T5015-CHI	T5020-CHI
		Stainless Steel	T5261-CH	T5361-CH
DISPLAY	• Recessed Single Receptacle with Wallplate Featuring Removable Receptacle Cover • Smooth Face • Tamper-Resistant • Back and Side Wire 	Brass	T5250-B	T5350-B


T5361-CH

Universal (Europlug)

COMMERCIAL SPECIFICATION GRADE

NEMA 5-15R  CEE 7/16 

NEMA 5-15R  CEE 7/16 

2-Pole, 3-Wire • 125/250 Volt		Color	15 Amp	16 Amp
DECORA PLUS™	• Straight Blade and Europlug Duplex Receptacle • Smooth Face • Back and Side Wire	White	5825-W	5835-W
		Ivory	5825-I	5835-I
		Lt Almond	5825-T	5835-T
		Black	5825-E	5835-E


5825-W

Short Strap Receptacles

COMMERCIAL SPECIFICATION GRADE		NEMA 5-15R	NEMA 5-20R
2-Pole, 3-Wire • 125 Volt	**Color**	**15 Amp**	**20 Amp**
SHORT STRAP • Single Receptacle • Smooth Face • Side Wire Only	Black	—	5558-SS
SHORT STRAP • Single Receptacle • Tapped Mounting Holes • Smooth Face • Side Wire Only	Black	5258-SS	—
4" CVR. • Mounted to Round 4" Cover • Smooth Face • Side Wire Only	Black	5059 (Single)	—
	Black	5042 (Duplex)	—

COMMERCIAL SPECIFICATION GRADE		NEMA 6-15R	NEMA 6-20R
2-Pole, 3-Wire • 250 Volt	**Color**	**15 Amp**	**20 Amp**
SH. STRAP • Single Receptacle • Smooth Face • Side Wire Only	Black	5658-SS	5458-SS




5558-SS




5059

Wallplates: Quick Reference Guide

NYLON WALLPLATES




80703-W 80704-W 80716-W 80730-W




80401-NW 80409-NW 80411-NW

302 STAINLESS STEEL WALLPLATES



84003-40 84004-40 84016-40 84030-40



84401-40 84409-40 84411-40

What appears above is only a small sampling of the wallplate options available from Leviton. For a far more comprehensive listing, please visit our website at **leviton.com/wallplates**.





Weatherproof Device Covers

The Leviton offering of Weatherproof Covers & Boxes comprises both 1- and 2-gang configurations that comply with the National Electric Code® (2017) Section 406.9 for weatherproof enclosures in damp and wet locations.

To explore our complete line of boxes, hoods and covers, visit: **leviton.com/weatherproofcovers**

Leviton Manufacturing Co., Inc.
201 N Service Rd, Melville, NY 11747
Telephone: 1-800-323-8920 • Tech Line: 1-800-824-3005 (M-F 8AM-10PM EST, Sat 9AM-7PM EST)

Visit our Website at: leviton.com/receptaclegrades email: commercial@leviton.com

SCAN TO EXPLORE ALL PRODUCT DETAILS & VIDEOS

© 2026 Leviton Manufacturing Co., Inc. All rights reserved. Specifications subject to change without notice.