




Product Datasheet

ANDERSON FARGO

VANS11 -- Partial Tension Compression Splice

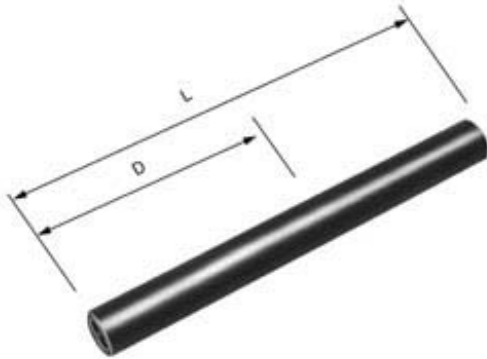

Partial Tension versatile Compression Splice

Product Specifications

Splice Type



VERSAtile™
Compression Splices
(For use with Die type
and VersaCrimp tools)

Versatile Compression Series



VACS Series
Compression Splice
VERSAtile™
Minimum Tension
Aluminum or Copper
Conductor

PDF Catalog Page

[Click HERE to view the web page.](#)

Conventional Tooling Conductor Size Minimum

0.292 in

Conventional Tooling Conductor Size Maximum

0.332 in

VersaCrimp Conductor Size Minimum

0.128 in

VersaCrimp Conductor Size Maximum

0.332 in

Material

Aluminum

Conventional Tooling Minimum Conductor

.292 in

Conventional Tooling Maximum Conductor

.332 in

Conventional Tooling Conductor Size

336.4 kcmil ACSR, 336.4 kcmil-#1 Str. Al/Cu

VersaCrimp Conductor Range

#6-#2 ACSR, #8-#1 Str. Al/Cu

VersaCrimp Conductor Minimum

.128 in

VersaCrimp Conductor Maximum	.332 in
Dimension D	2.06 in (52 mm)
Dimension L	4.25 in (108 mm)
Length before Compression	4.25 in (108 mm)
Compression Method	VersaCrimp or Conventional Die Tooling
Die Size	5/8, EEI-8A
UL Listed	No
Inhibitor Loaded	Yes
Color Code	Red
Material Type	Non-Standard
UPC Code	09635933457
Standard Package	50
Standard Package Unit	Each
Min Order Qty	50
Weight / Ea.	0.098 lbs

Notes

For Aluminum or ACSR messenger-neutrals of triplex service drop cables and loop jumper use. Connector has minimum tension rating when used with copper conductor.

Features

For use with either VersaCrimp or conventional tooling.

Compressed Product Number

VANS11

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.