



Main

Product	Single Throw Safety Switch
Current Rating	1200 A
Number of Poles	3
Voltage Rating	600 V AC/DC
Disconnect Type	Fusible disconnect
Short Circuit Current Rating	200 kA maximum L
Mounting Type	Surface
Factory Installed Neutral	None
Electrical Connection	Lugs
Duty Rating	Heavy duty
Certifications	UL listed file E2875
Enclosure Rating	NEMA 1 steel
Wire Size	AWG 3/0...750 kcmil copper or aluminium

Complementary

Maximum Horse Power Rating	200 Hp 480 V AC 50...60 Hz 3 phase NEC 240.6 500 Hp 480 V AC 50...60 Hz 3 phase NEC 430.52 250 Hp 600 V AC 50...60 Hz 3 phase NEC 240.6 500 Hp 600 V AC 50...60 Hz 3 phase NEC 430.52 50 hp 600 V DC
Tightening torque	375 lbf.in (42.37 N.m) 0.13...0.59 in ² (85.01...380 mm ²) AWG 3/0...750 kcmil)
Width	36.62 in (930.15 mm)
Height	69.13 in (1755.90 mm)
Maximum Depth	17.75 in (450.85 mm)

Ordering and shipping details

Category	00053 - H&HU SW,NEMA1,400-1200A
Discount Schedule	DE1
GTIN	00785901195467
Nbr. of units in pkg.	1
Package weight(Lbs)	361 lb(US) (163.75 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	74.02 in (188 cm)
Package 1 width	31.10 in (79 cm)
Package 1 Length	37.91 in (96.3 cm)

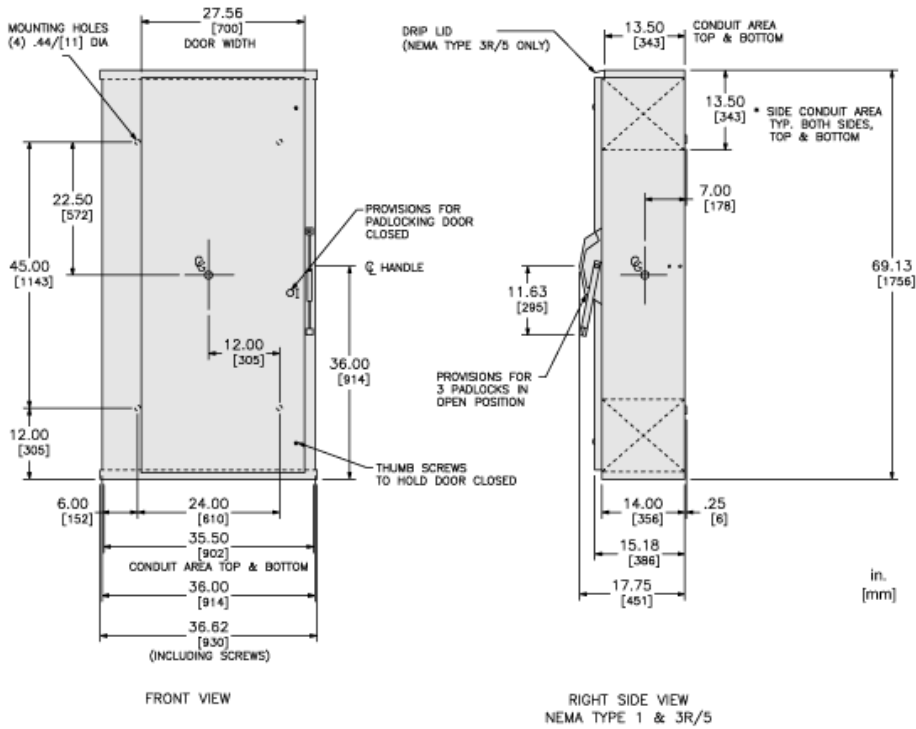
Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
PVC free	Yes
Halogen content performance	Halogen free plastic parts product

Contractual warranty



Warranty	18 months
----------	-----------

Approximate Dimensions



CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	3 PHASE HORSEPOWER RATINGS						DC HORSEPOWER RATINGS			
			240VAC		480VAC		600VAC		250VDC		600VDC	
			STD	MAX.	STD	MAX.	STD	MAX.	STD	MAX.	STD	MAX.
H32B	240VAC;250VDC	A	100	250	—	—	—	—	50	50	—	—
H32BR	240VAC;250VDC	A	100	250	—	—	—	—	50	50	—	—
H32BN	240VAC;250VDC	B	100	250	—	—	—	—	50	50	—	—
H32BNR	240VAC;250VDC	B	100	250	—	—	—	—	50	50	—	—
H36B	600VAC;600VDC	A	100	250	200	500	250	500	—	—	50	50
H36BR	600VAC;600VDC	A	100	250	200	500	250	500	—	—	50	50
H36BN	600VAC;600VDC	B	100	250	200	500	250	500	—	—	50	50
H36BNR	600VAC;600VDC	B	100	250	200	500	250	500	—	—	50	50
HU36B	600VAC;600VDC	C	100	100	—	500	—	500	—	—	50	50
HU36BR	600VAC;600VDC	C	100	100	—	500	—	500	—	—	50	50

Wiring Diagrams

WIRING DIAGRAMS			
FUSIBLE		NOT FUSIBLE	
			
			

TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
1200	(4)750 KCMIL	(4)#3/0 AWG	75°C AL OR CU

FUSE PROVISIONS			
AMPERES	TYPE	AMPERES	TYPE
1200	CLASS "L"	800	CLASS "L"