


NOTES:
 FINISH - GRAY BAKED ENAMEL - ANSI #49
 CSA CERTIFIED - FILE LL-154828
 UL LISTED - FILE E-154828
 ALL NEUTRALS - INSULATED GROUNDABLE (SHIPPED LOOSE)
 SUITABLE FOR USE AS SERVICE EQUIPMENT.
 SHORT CIRCUIT RATING:
 200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS L FUSES.
 75 LBS MAX FORCE REQUIRED TO OPERATE HANDLE.
 FOR NEMA TYPE 3R APPLICATIONS 1/4-20 DRAIN SCREW MUST BE REMOVED.

FRONT VIEW

SEISMIC NOTES:
 USE (4) 7/16" DIA GRADE 5 STEEL MOUNTING BOLTS @ HOLES AA
 MAX CONFIGURED WEIGHT 370 LB FOR THE PURPOSE OF DETERMINING
 SEISMIC ANCHORAGE REQUIREMENTS. FOR ALL OTHER APPLICATIONS,
 CONTACT SQUARE D COMPANY.

RIGHT SIDE VIEW

NEMA TYPE 1 & 3R/5

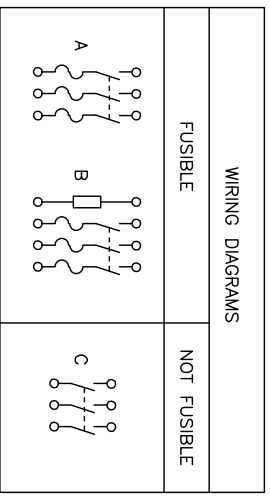

TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
1200	(4)750 KCMIL	(4)#5/0 AWG/75°C AL OR CU	

FUSE PROVISIONS			
AMPERES	TYPE	AMPERES	TYPE
1200	CLASS "L"	800	CLASS "L"

* SIDE ENTRY/EXIT MUST MEET ALL APPLICABLE STANDARDS AND CODES.

DUAL DIMENSIONS: INCHES
 MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	3 PHASE HORSEPOWER RATINGS				DC HORSEPOWER RATINGS			
			STD	MAX.	STD	MAX.	STD	MAX.	STD	MAX.
H328	240VAC/250VDC	A	100	250	—	—	50	—	—	
H328R	240VAC/250VDC	B	100	250	—	—	50	—	—	
H328N	240VAC/250VDC	B	100	250	—	—	50	—	—	
H328NR	240VAC/250VDC	B	100	250	—	—	50	—	—	
H328	600VAC/600VDC	A	100	250	200	500	—	—	—	
H328R	600VAC/600VDC	A	100	250	200	500	—	—	—	
H328N	600VAC/600VDC	A	100	250	200	500	—	—	—	
H328NR	600VAC/600VDC	A	100	250	200	500	—	—	—	
H368R	600VAC/600VDC	C	100	250	—	—	50	—	—	
HU368R	600VAC/600VDC	C	100	250	—	—	50	—	—	

HEAVY DUTY SAFETY SWITCHES - SEISMIC
 VISIBLE BLADE TYPE
 ENCLOSURE - NEMA TYPE 1 GENERAL PURPOSE
 NEMA TYPE 3R RAINPROOF, NEMA TYPE 5 DUST TIGHT (INDOOR)

SQUARE D
 by Schneider Electric

DWG# 1940S