


## Round/Octagon Boxes and Accessories


### 4" Octagon Boxes




54151 N



54151 NE  
Adjustable ears  
recessed 3/8"




54151 NL  
L bracket flush mounted




54151 NV  
V bracket recessed 1/2"



54171N-25



54171 NL  
L bracket mounted flush



54171NV-25  
V bracket recessed 1/2"



54151 1/2




54151 3/4




54151 1/2 & 3/4



54151 V 1/2  
V bracket  
recessed 1/2"




54151 L 1/2  
L bracket flush mounted

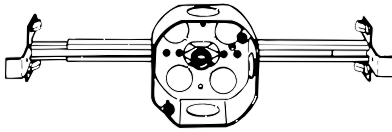

54151 J 1/2 — Mounted on 6010-DW bar adjustable  
10 1/2" to 18 1/2". Offset for 1/2", 3/4" or 5/8" plaster. Maximum  
horizontal positioning. 3/8" fixture stud.



541711/2-25



54171 3/4




54171 1/2 3/4




54171 1



54151 A



54151AV-25  
V bracket recessed 1/2"



54151 AL  
L bracket mounted flush

CAT. NO.	DEPTH (IN.)	CU. IN. CAPACITY	CLAMPS	BRKTS.	KNOCKOUTS (IN.)				STD. CTN.
					EA. SIDE CONDUIT	EA. END CONDUIT	EA. END CABLE	BOTTOM CONDUIT	
<b>With Non-Metallic Sheathed Cable Clamps</b>									
54151 N	1 1/2	15.8	C-5	—	1-1/2	—	2	1-1/2	50
54151 NE	1 1/2	15.8	C-5	—	1-1/2	—	2	1-1/2	50
54151 NL	1 1/2	15.8	C-5	L	1-1/2	—	2	1-1/2	50
54151 NV	1 1/2	15.8	C-5	V	1-1/2	—	2	1-1/2	50
54171N-25	2 1/8	22.5	C-5	—	1-1/2	—	2	1-1/2	50
54171 NL	2 1/8	22.5	C-5	L	1-1/2	—	2	1-1/2	50
54171NV-25	2 1/8	22.5	C-5	V	1-1/2	—	2	1-1/2	25
<b>With Conduit KOs</b>									
54151 1/2	1 1/2	15.8	—	—	1-1/2	1-1/2	—	5-1/2	50
54151 3/4	1 1/2	15.8	—	—	1-3/4	1-3/4	—	3-1/2	50
								2-3/4	
54151 1/2 & 3/4	1 1/2	15.8	—	—	1-1/2	1-3/4	—	3-1/2	50
								2-3/4	
54151 V 1/2	1 1/2	15.8	—	V	1-1/2	1-1/2	—	5-1/2	25
54151 L 1/2	1 1/2	15.8	—	L	1-1/2	1-1/2	—	5-1/2	25
54151 J 1/2	1 1/2	15.8	—	With bar hanger	1-1/2	1-1/2	—	4-1/2	25
541711/2-25	2 1/8	22.5	—	1-1/2"	1-1/2	—	5-1/2	50	—
54171 3/4	2 1/8	22.5	—	1-3/4"	1-3/4	—	3-1/2	25	—
								2-3/4	—
54171 1/2 3/4	2 1/8	22.5	—	1-1/2"	1-3/4	—	3-1/2	25	—
								2-3/4	—
54171 1	2 1/8	22.5	—	—	1-1	1-1	—	3-1/2	25
								2-3/4	—
<b>With Armored Cable/Metal-Clad Clamps</b>									
54151 A	1 1/2	15.8	C-3	—	1-1/2	—	2	1-1/2	25
54151AV-25	1 1/2	15.8	C-3	V	1-1/2	—	2	1-1/2	50
54151 AL	1 1/2	15.8	C-3	L	1-1/2	—	2	1-1/2	25

50 lb. maximum loading for fixtures.