

# 50A and 60A Spider® II Boxes



50A Spider II



60A Spider II



60A Class "L" Spider II

## Spider II Temporary Power Boxes

Rating	Type	Qty	Receptacle Ratings	Receptacle Components	Protection		Catalog Number
					Overload	GFI	
30A, 120/240V AC (Maximum)	Straight Blade Twist-Lock® (inlet) Twist-Lock (outlet)	7	20A, 125V	<b>HBL53R61</b> <b>HBL2715SWR</b> <b>HBL2710</b>	Yes	Yes	<b>SDSB1A</b>
		1	30A, 120/240V		No	No	
		1	30A, 120/240V		No	No	
50A, 120/240V AC (Maximum)	Straight Blade Twist-Lock (inlet) Twist-Lock (outlet)	7	20A, 125V	<b>HBL53R61</b> <b>HBL6375S</b> <b>CS6369</b>	Yes	Yes	<b>SBSB1A</b>
		1	50A, 125/250V		No	No	
		1	50A, 125/250V		No	No	
50A, 120/240V AC (Maximum)	Straight Blade Twist-Lock Twist-Lock (inlet) Twist-Lock (outlet)	6	20A, 125V	<b>HBL53R61</b> <b>HBL2620SW</b> <b>HBL6375S</b> <b>CS6369</b>	Yes	Yes	<b>SBSB2</b>
		1	30A, 250V		Yes	Yes	
		1	50A, 125/250V		No	No	
		1	50A, 125/250V		No	No	
50A, 120/240V AC (Maximum)	Twist-Lock Twist-Lock (inlet) Twist-Lock (outlet)	7	20A, 125V	<b>HBL2310SW</b> <b>HBL6375S</b> <b>CS6369</b>	Yes	Yes	<b>SBTL1A</b>
		1	50A, 125/250V		No	No	
		1	50A, 125/250V		No	No	
50A, 120/240V AC (Maximum)	Twist-Lock Twist-Lock Twist-Lock (inlet) Twist-Lock (outlet)	6	20A, 125V	<b>HBL2310SW</b> <b>HBL2620SW</b> <b>HBL6375S</b> <b>CS6369</b>	Yes	Yes	<b>SBTL2</b>
		1	30A, 250V		Yes	Yes	
		1	50A, 125/250V		No	No	
		1	50A, 125/250V		No	No	
60A, 3Ø 120/208V AC (Maximum)	Straight Blade Pin and Sleeve (inlet) Pin and Sleeve (outlet)	6	20A, 125V	<b>HBL53R61</b> <b>HBL560B9R</b> <b>HBL560R9W</b>	Yes	Yes	<b>SCSB0*</b>
		1	60A, 3ØY 120/208V		No	No	
		1	60A, 3ØY 120/208V		No	No	
60A, 3Ø 120/208V AC (Maximum)	Twist-Lock Pin and Sleeve (inlet) Pin and Sleeve (outlet)	6	20A, 125V	<b>HBL2310SW</b> <b>HBL560B9R</b> <b>HBL560R9W</b>	Yes	Yes	<b>SCTL0*</b>
		1	60A, 3ØY 120/208V		No	No	
		1	60A, 3ØY 120/208V		No	No	


## Class "L" Spider II Temporary Power Boxes

Rating	Type	Qty	Receptacle Ratings	Receptacle Components	Protection		Catalog Number
					Overload	GFI	
60A, 3Ø 120/208V AC (Maximum)	Straight Blade Class "L" (inlet) Class "L" (outlet)	6	20A, 125V	<b>HBL53R61</b> — —	Yes	Yes**	<b>SCSB0M2</b>
		1	60A, 3ØY, 120/208V		No	No	
		1	60A, 3ØY, 120/208V		No	No	
60A, 3Ø 120/208V AC (Maximum)	Twist-Lock Class "L" (inlet) Class "L" (outlet)	6	20A, 125V	<b>HBL2310SW</b> — —	Yes	Yes**	<b>SCTL0M2</b>
		1	60A, 3ØY, 120/208V		No	No	
		1	60A, 3ØY, 120/208V		No	No	

Note: \*60A units are UL and cUL only.

\*\*GFCI protection on 4 devices only.

## Dimensions

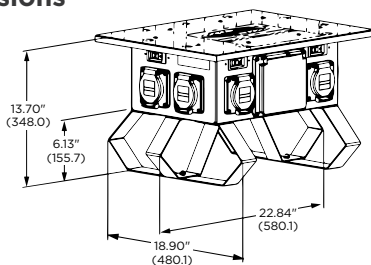

Dimensions in Inches (mm)

## Specifications

Spider II	
Listing/Certification	UL1640 cUL and CSA, UL943
Environment	Indoor and outdoor wet and dry locations
Enclosure Type	3R, rainproof, suitable for use in damp locations
Code Compliance	NEC®, ANSI/NFPA 70