


**20 Amp, 125, 250 Volts and 277 Volts AC
2 Pole, 3 Wire, Grounding**

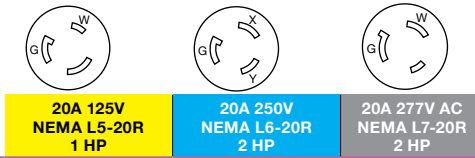

Connector Bodies

Watertight Safety-Shroud® IP66 SUITABILITY UL Type 4x, 12

Description	Cord Dia.	Catalog Number	20A 125V NEMA L5-20R 1 HP	20A 250V NEMA L6-20R 2 HP	20A 277V AC NEMA L7-20R 2 HP
Black Valox® housing, white Valox® clamps.	.360"-.930" (9-24)	HBL2313SW	HBL2323SW	HBL2333SW	

Insulgrip® IP20 SUITABILITY

Description	Cord Dia.	Catalog Number	20A 125V NEMA L5-20R 1 HP	20A 250V NEMA L6-20R 2 HP	20A 277V AC NEMA L7-20R 2 HP
Black and white nylon.	.360"-.930" (9-24)	HBL2313	HBL2323	HBL2333	
Black and white nylon, spring termination	.360"-.930" (9-24)	HBL2313ST	HBL2323ST	HBL2333ST	
Spring termination, all black		HBL2313STBK	HBL2323STBK	-	
Corrosion resistant, yellow nylon.	.360"-.930" (9-24)	HBL23CM13	HBL23CM23	-	
All black nylon.	.360"-.930" (9-24)	HBL2313BK	HBL2323BK	-	
Cord clamps with removable inserts. All black nylon.	.360"-.930" (9-24)	HBL2313EBK	HBL2323EBK	-	

Note: See page B-52 for accessories.

Valise® IP20 SUITABILITY

Description	Cord Dia.	Catalog Number	20A 125V NEMA L5-20R 1 HP	20A 250V NEMA L6-20R 2 HP	20A 277V AC NEMA L7-20R 2 HP
Yellow nylon.	.325"-.720" (8.26-18.3)	HBL2313VY	HBL2323VY	-	
Black nylon.	.325"-.720" (8.26-18.3)	HBL2313VBK	HBL2323VBK	HBL2333VBK	

Note: See page B-53 for accessories.

Receptacles

Watertight Safety-Shroud® IP66 SUITABILITY UL Type 4x, 12

Description	Catalog Number	20A 125V NEMA L5-20R 1 HP	20A 250V NEMA L6-20R 2 HP	20A 277V AC NEMA L7-20R 2 HP
Gray Valox® housing and flange, back wired.	HBL2310SW	HBL2320SW	HBL2330SW	

Note: See page B-54 for accessories.

Safety-Shroud® Twist-Lock® IP20 SUITABILITY

Description	Catalog Number	20A 125V NEMA L5-20R 1 HP	20A 250V NEMA L6-20R 2 HP	20A 277V AC NEMA L7-20R 2 HP
Gray Valox® angle housing, one gang, back wired.	HBL2310AR	HBL2320AR	HBL2330AR	
Gray Valox® surface mounting, one gang, back wired.	HBL2310SR	HBL2320SR	HBL2330SR	
Gray Valox® semi-flush, two gang, back wired.	HBL2310SR2	HBL2320SR2	HBL2330SR2	

Single Flush Receptacles IP20 SUITABILITY

Description	Catalog Number	20A 125V NEMA L5-20R 1 HP	20A 250V NEMA L6-20R 2 HP	20A 277V AC NEMA L7-20R 2 HP
Black nylon face, back and side wired.	HBL2310	HBL2320	HBL2330	
Black nylon face, spring terminals.	HBL2310ST	HBL2320ST	-	
Blue nylon face, back and side wired.	HBL2310M7	HBL2320M4	-	
Red nylon face, spring terminals	HBL2310STR	HBL2320STR	-	
Isolated ground, orange nylon face, back and side wired.	IG2310	IG2320	-	
Isolated ground, orange nylon face, spring termination	IG2310ST	-	-	
Corrosion resistant, yellow nylon face, back and side wired.	HBL23CM10	-	-	
Ring terminal connection.	HBL2310RT	HBL2320RT	-	


Note: See page B-52 for accessories.

Insulgrip® Flanged Receptacles

Description	Catalog Number	20A 125V NEMA L5-20R 1 HP	20A 250V NEMA L6-20R 2 HP	20A 277V AC NEMA L7-20R 2 HP
Nylon casing, back wired.	HBL2316	HBL2326	HBL2336	
Nylon casing, back wire, spring termination	HBL2316ST	HBL2326ST	-	

Note: See page B-52 for accessories.

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.

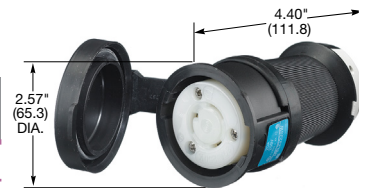


HBL2323SW



HBL2313




HBL2313ST




HBL2313VY



HBL2320SW



HBL2310ST



HBL2320SR

Dimensions in Inches (mm)