


Hubbellock Devices

30 Amp, 600 and 480 Volts AC,
20 Amp, 250 Volts DC

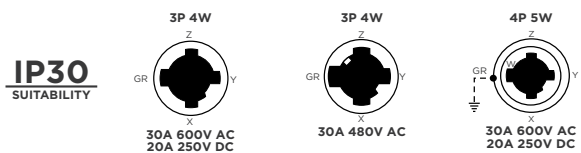


IP30
SUITABILITY

Plugs

Description	Cord Dia.	Catalog Number		
Black nylon housing, thermoplastic interior.	.700"-1.200" (17.78-30.5)	HBL21415B	—	—
Same as above except corrosion resistant.	.700"-1.200" (17.78-30.5)	HBL21CM415B	—	—
Red nylon housing, thermoset interior.	.700"-1.200" (17.78-30.5)	—	HBL20445B[†]	—
Black nylon housing, thermoset interior, steel shroud.	.700"-1.200" (17.78-30.5)	—	—	HBL25415B

Note: See page C-68 for accessories.

[†]Not CSA Certified.



HBL21415B




HBL20445B

Flanged Inlets

Description	Catalog Number		
Weathertight, corrosion resistant, nickel plated brass plate, for FS/FD box mounting.	HBL22CM428	—	—
Black phenolic interior, aluminum housing, for FS/FD box mounting (not shown).	HBL20418	—	—
Aluminum angle housing, with 3/4" NPT hub for surface mounting.	HBL21447	—	—



HBL25415B



HBL21447



SEHBL3 - Switched enclosure for use with 3 pole 4 wire 30A Hubbellock receptacle. Receptacle not included. See page C-46 for additional information.

Dimensions in Inches (mm)