



Color: Ivory

UPC Code: 07847723707

Country Of Origin: Mexico

NEMA:
5-20R



5340-I

Brand Features

Leviton's line of Heavy-Duty Specification Grade receptacles are designed and manufactured to withstand the most demanding environments. Available in a wide variety of configurations, including isolated ground, tamper-resistant, etc., these Commercial Grade devices are the electrical contractor's choice for use in hotels, schools, hospitals and commercial office buildings.

Item Description

Duplex Receptacle Outlet, Commercial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Pre-Wired Leads, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Ivory

Technical Information

AC Horsepower Ratings

At Rated Voltage: 1 HP

Electrical Specifications

Amperage: 20 A

Voltage: 125 VAC

Pole: 2

Wire: 3

Maximum Working Voltage: 125V as rated

Dielectric Voltage Withstand: 2000V minimum per UL 498

Current Interrupting: Certified for current interrupting at full rated current

Temperature Rise: Max 30C after 100 cycles OL at 150 percent rated current

Grounding: Self-Grounding

Environmental Specifications

Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 60°C

Material Specifications

Cover Material: Thermoplastic

Base Material: Thermoplastic

Mounting Strap: Galvanized Steel with Riveted Ground Contacts

Power Contacts: Brass, triple wipe

Terminal Leads: 6", #12 AWG THHN

Grounding Leads: 6", #12 AWG THHN

Bushing: Die Cast Aluminum

Mounting Screws: Triple Combination Head, Steel

Color: Ivory

Mechanical Specifications

Product ID: Ratings are permanently marked on device

Lead Identification: Leads identified in accordance with UL 498 (black, white & green)

Termination: Pre-Wired Leads

Product Features

NEMA: 5-20R

Color: Ivory

Device Type: Duplex Receptacle Outlet

Feature 4: Smooth Face

Grade: Commercial Specification Grade

Standards and Certifications

NEMA: WD-6


ANSI: C-73

UL498: File E13399


CSA C22.2 No. 42: File 152105

NOM: 057

Warranty: 10 Year Limited

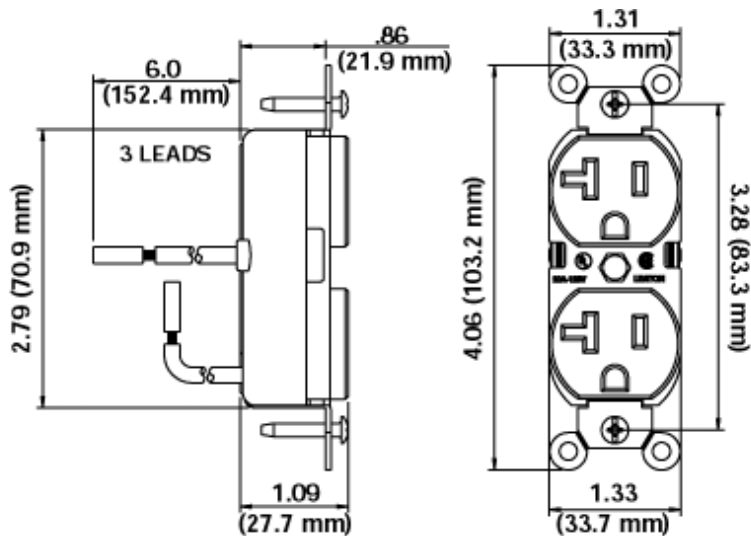

Wiring Diagram

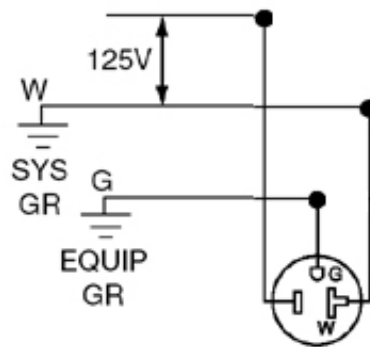

5-20R

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

