


Midget Twist-Lock® Devices 15A, 125V AC; 2 Pole, 3 Wire Grounding Connector

HUBBELL

Features

- Abuse resistant nylon housing
- Phenolic body for high heat resistance
- Angled body design for low profile in tight spaces



Ordering Information


Description	Cord Diameter	UPC	Catalog Number
Black straight connector.	.281"-.421" (7.1-10.7)	783585237749	HBL7593

Listings

Listed to UL 498
Certified to CSA C22.2 No.42

Specifications

Housing	Nylon
Blades	Brass
Contact Holder	Phenolic
Terminal Screws	#5-40 Brass
Terminal Clamp	Zinc plated steel with black lacquer finish

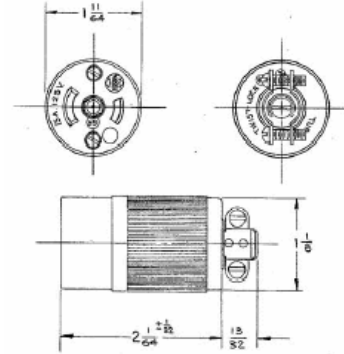

Performance

Electrical

Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical

Terminal Accomodation	#18 AWG - #14 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

Environmental

Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)

Accessories

Plug	HBL7594
Nylon Flanged Inlet	HBL7595N
Stainless Steel Flanged Inlet	HBL7595
StainlessSteel Flanged Inlet with Covered Terminals	HBL7551

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

