

Non-NEMA Twist-Lock® Devices  
20A, 3 Phase Y 120/208V AC- only, 400 Hz, 4  
Pole, 5 Wire Grounding  
Variload® Receptacle

HUBBELL

Features

- Heat resistant thermoset construction
- Non-interchangeable center slot configuration to be designated to different circuits

Ordering Information

Description	Device Color	UPC	Catalog Number
4P5W, 20A 3PH 120/208V AC Max, Non-NEMA, Black Urea Face	Black	783585238050	HBL45905

Listings


Listed to UL 498

Specifications

Housing	Molded Thermoset
Base	Molded thermoset
End Plate	Cold rolled steel
Strap	Brass
Contact Spring	Brass
Mounting Screw	Steel, zinc plated

Performance

<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
<b>Mechanical</b>	
Terminal Accommodation	#14 AWG - #10 AWG solid or stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
<b>Environmental</b>	
Flammability	V0 per UL94 or CSA 22.2 No.0.17
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

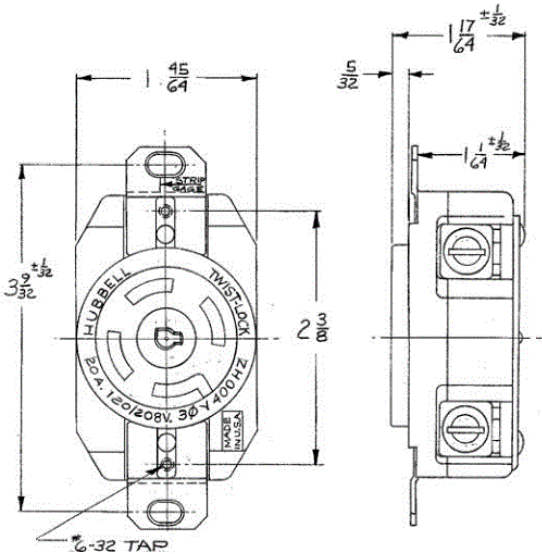

Accessories

Plug	HBL45915
Wallplate or Weatherproof Cover	1.74" Opening

Resources

Customer Use Drawing
eCatalog

