

## Standard Duty Support Grips


Offset Eye, Single Weave, Tin-Coated Bronze and Stainless Steel.

**IMPORTANT:**  
Read all breaking strength, safety and technical data relating to this product.

Refer to pages W-33 and W-34.

### Offset Eye, Closed Mesh

For permanent support when cable end is available to be installed through grip.

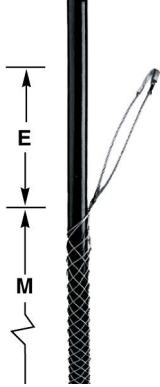

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs.		Working Load Lbs.		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel	Tin-Coated Bronze	Stainless Steel				
.50"- .62" (1.27-1.57)	530	1,370	53	137	4" (10.16)	10" (25.40)	<b>02201037</b>	<b>02401037</b>
.63"- .74" (1.60-1.88)	750	1,950	75	195	4" (10.16)	10" (25.40)	<b>02201038</b>	<b>02401038</b>
.75"- .99" (1.90-2.51)	950	2,060	95	206	4" (10.16)	13" (33.02)	<b>02201039</b>	<b>02401039</b>
1.00"-1.24" (2.54-3.15)	1,500	2,678	150	268	5" (12.70)	14" (35.56)	<b>02201041</b>	<b>02401041</b>
1.25"-1.49" (3.17-3.78)	1,500	4,490	150	449	5" (12.70)	15" (38.10)	<b>02201042</b>	<b>02401042</b>
1.50"-1.74" (3.81-4.42)	1,500	3,700	150	370	5" (12.70)	17" (43.18)	<b>02201043</b>	<b>02401043</b>
1.75"-1.99" (4.44-5.05)	2,000	4,375	200	437	6" (15.24)	19" (48.26)	<b>02201044</b>	<b>02401044</b>
2.00"-2.49" (5.08-6.32)	3,100	5,500	310	550	9" (22.86)	21" (53.34)	<b>02201045</b>	<b>02401045</b>
2.50"-2.99" (6.35-7.59)	3,100	—	310	—	9" (22.86)	23" (58.42)	<b>02201046</b>	—
3.00"-3.49" (7.62-8.86)	3,800	—	380	—	11" (27.94)	25" (63.50)	<b>02201047</b>	—
3.50"-3.99" (8.89-10.13)	3,250	—	325	—	11" (27.94)	27" (68.58)	<b>02201048</b>	—

### Offset Eye, Split Mesh, Lace Closing


For permanent support when cable end is not available.



Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		Working Load Lbs.		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel	Tin-Coated Bronze	Stainless Steel				
.50"- .62" (1.27-1.57)	500	—	50	—	4" (10.16)	10" (25.40)	<b>02202037</b>	—
.63"- .74" (1.60-1.88)	750	1,952	75	195	4" (10.16)	10" (25.40)	<b>02202038</b>	<b>02402038</b>
.75"- .99" (1.90-2.51)	950	—	95	—	4" (10.16)	13" (33.02)	<b>02202039</b>	—
1.00"-1.24" (2.54-3.15)	1,500	—	150	—	5" (12.70)	14" (35.56)	<b>02202041</b>	—
1.25"-1.49" (3.17-3.78)	1,500	4,490	150	449	5" (12.70)	15" (38.10)	<b>02202042</b>	<b>02402042</b>
1.50"-1.74" (3.81-4.42)	1,500	—	150	—	5" (12.70)	17" (43.18)	<b>02202043</b>	—
1.75"-1.99" (4.44-5.05)	1,800	4,375	180	437	6" (15.24)	19" (48.26)	<b>02202044</b>	<b>02402044</b>
2.00"-2.49" (5.08-6.32)	2,150	5,500	215	550	9" (22.86)	21" (53.34)	<b>02202045</b>	<b>02402045</b>
2.50"-2.99" (6.35-7.59)	2,150	5,500	215	550	9" (22.86)	23" (58.42)	<b>02202046</b>	<b>02402046</b>
3.00"-3.49" (7.62-8.86)	3,250	10,190	325	1,019	11" (27.94)	25" (63.50)	<b>02202047</b>	<b>02402047</b>
3.50"-3.99" (8.89-10.13)	3,250	—	325	—	11" (27.94)	27" (68.58)	<b>02202048</b>	—

### Offset Eye, Split Mesh, Rod Closing

For support when cable end is not available.

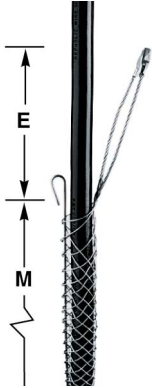

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		Working Load Lbs.		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel	Tin-Coated Bronze	Stainless Steel				
.50"- .62" (1.27-1.57)	500	1,000	50	100	4" (10.16)	7" (17.78)	<b>02203037</b>	<b>02403037</b>
.63"- .74" (1.60-1.88)	750	1,950	75	195	4" (10.16)	9" (22.86)	<b>02203038</b>	<b>02403038</b>
.75"- .99" (1.90-2.51)	950	1,950	95	195	4" (10.16)	10" (25.40)	<b>02203039</b>	<b>02403039</b>
1.00"-1.24" (2.54-3.15)	1,500	2,500	150	250	5" (12.70)	12" (30.48)	<b>02203041</b>	<b>02403041</b>
1.25"-1.49" (3.17-3.78)	1,500	4,200	150	420	5" (12.70)	14" (35.56)	<b>02203042</b>	<b>02403042</b>
1.50"-1.74" (3.81-4.42)	1,500	4,500	150	450	5" (12.70)	15" (38.10)	<b>02203043</b>	<b>02403043</b>
1.75"-1.99" (4.44-5.05)	2,000	4,375	200	437	6" (15.24)	16" (40.64)	<b>02203044</b>	<b>02403044</b>
2.00"-2.49" (5.08-6.32)	3,100	8,350	310	835	9" (22.86)	19" (48.26)	<b>02203045</b>	<b>02403045</b>
2.50"-2.99" (6.35-7.59)	3,100	—	310	—	9" (22.86)	20" (50.80)	<b>02203046</b>	—
3.00"-3.49" (7.62-8.86)	4,300	8,400	430	840	11" (27.94)	21" (53.34)	<b>02203047</b>	<b>02403047</b>
3.50"-3.99" (8.89-10.13)	4,900	—	490	—	11" (27.94)	21" (53.34)	<b>02203048</b>	—

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)