

CS6360C



Color: Black-White

UPC Code: 07847732601

Country Of Origin: Mexico

NEMA:
Non-NEMA



Brand Features

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

Item Description

50Amp, 125V AC, Non-NEMA, 2P, 3W, Black & White Locking Connector, Industrial Grade, Grounding, California-Style(CS) – BLACK-WHITE

Technical Information

Electrical Specifications

Grounding: Grounding

Amperage: 50 A

Voltage: 125 VAC

Pole: 2

Wire: 3

Dielectric Voltage Withstand: 2000V minimum per UL 498

Maximum Working Voltage: 125V as rated

Current Interrupting: Certified for current interrupting at full rated current

Temperature Rise: Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

Environmental Specifications

Flammability: Rated HB or better UL94

Environment: Dry

Material Specifications

Face Module: Nylon

Wiring Chamber: Nylon

Assembly Screws: Brass

Housing Material: Nylon

Dust Shield: Santoprene TPE

Terminal Block: 0.062inch thick Copper

Terminal Set Screw: SS 302/304

Ground Shunt: Bronze

Ground Post: Brass

Plug Blade: 0.1000inch thick Brass

Plug Blade Shroud: SS 302/304

Standard Cable Clamp: Nylon

Cable Clamp Screw: Philips Head, SS 304

Color: Black-White

Mechanical Specifications

Terminal ID: X, W, Y, Z and Green for ground

Product ID: Ratings and Catalogue No. molded into face and stamped into shroud

Cord Range: .680 - 1.125

Product Features

NEMA: Non-NEMA

Color: Black-White

Device Type: Locking Connector

Brand: Black and White

Standards and Certifications


UL 498: File E13399

CSA C22.2 No. 42: File 152105

NOM: 057

RoHS: Compliant

Warranty: Lifetime Limited

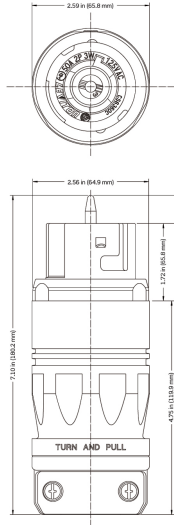

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

