

20A Twist-Lock Devices

**20 Amp, 125/250, 3Ø 250
and 3Ø 480 Volts AC
3 Pole, 4 Wire, Grounding**



**20A 125/250V
AC NEMA
L14-20P
2 (1) HP**

**20A 3Ø 250V
AC NEMA
L15-20P 3 HP**


**20A 3Ø 480V
AC NEMA
L16-20P 5 HP**



Plugs

Watertight Safety-Shroud®

		IP66 SUITABILITY		UL Type 4X, 12	
Description	Cord Dia.	Catalog Number			
Black Valox® housing, white Valox clamps.	.350"-1.150" (9-29)	HBL2411SW	HBL2421SW	HBL2431SW	

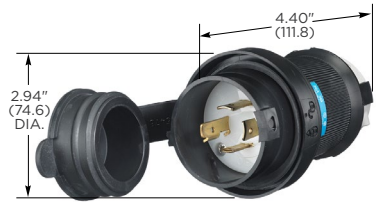

HBL2421SW

Safety-Shroud

		IP20 SUITABILITY		
Description	Cord Dia.	Catalog Number		
Black and white nylon body, white Valox shroud. Can be used with the Insulgrip® Connector Bodies.	.350"-1.150" (9-29)	HBL2411S	HBL2421S	HBL2431S

Note: See page C-48 for accessories.

Insulgrip

		IP20 SUITABILITY		
Description	Cord Dia.	Catalog Number		
Black and white nylon.	.350"-1.150" (9-29)	HBL2411	HBL2421	HBL2431
Black and white nylon, spring termination.	.350"-1.150" (9-29)	HBL2411ST	HBL2421ST	HBL2431ST
Corrosion resistant, yellow nylon.	.350"-1.150" (9-29)	HBL24CM11	HBL24CM21	HBL24CM31
All black nylon.	.350"-1.150" (9-29)	HBL2411BK	—	—
All black nylon, spring termination.	.350"-1.150" (9-29)	HBL2411STBK	—	—

Note: See page C-53 for accessories.




HBL2421S

Flanged Inlets

Watertight Safety-Shroud

		IP66 SUITABILITY		UL Type 4X, 12	
Description		Catalog Number			
Gray Valox housing and flange.		HBL2415SW	HBL2425SW	HBL2435SW	

Note: See page C-54 for accessories.



HBL2411

Insulgrip

		IP20 SUITABILITY		
Description		Catalog Number		
Nylon casing, back wired.		HBL2415	HBL2425	HBL2435
Nylon casing, spring termination.		HBL2415ST	HBL2425ST	HBL2435ST

Note: See page C-53 for accessories.


See pages C-69 and C-70 for technical information on Twist-Lock and Watertight Safety-Shroud devices.



HBL2425SW



HBLMITL - For use with Watertight Safety-Shroud receptacles, see page C-48.



HBL2415

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.

Dimensions in Inches (mm)